





**FRONT: 5.96m**  
**SIDE: 3.00m**  
**HEIGHT: 2.10m**

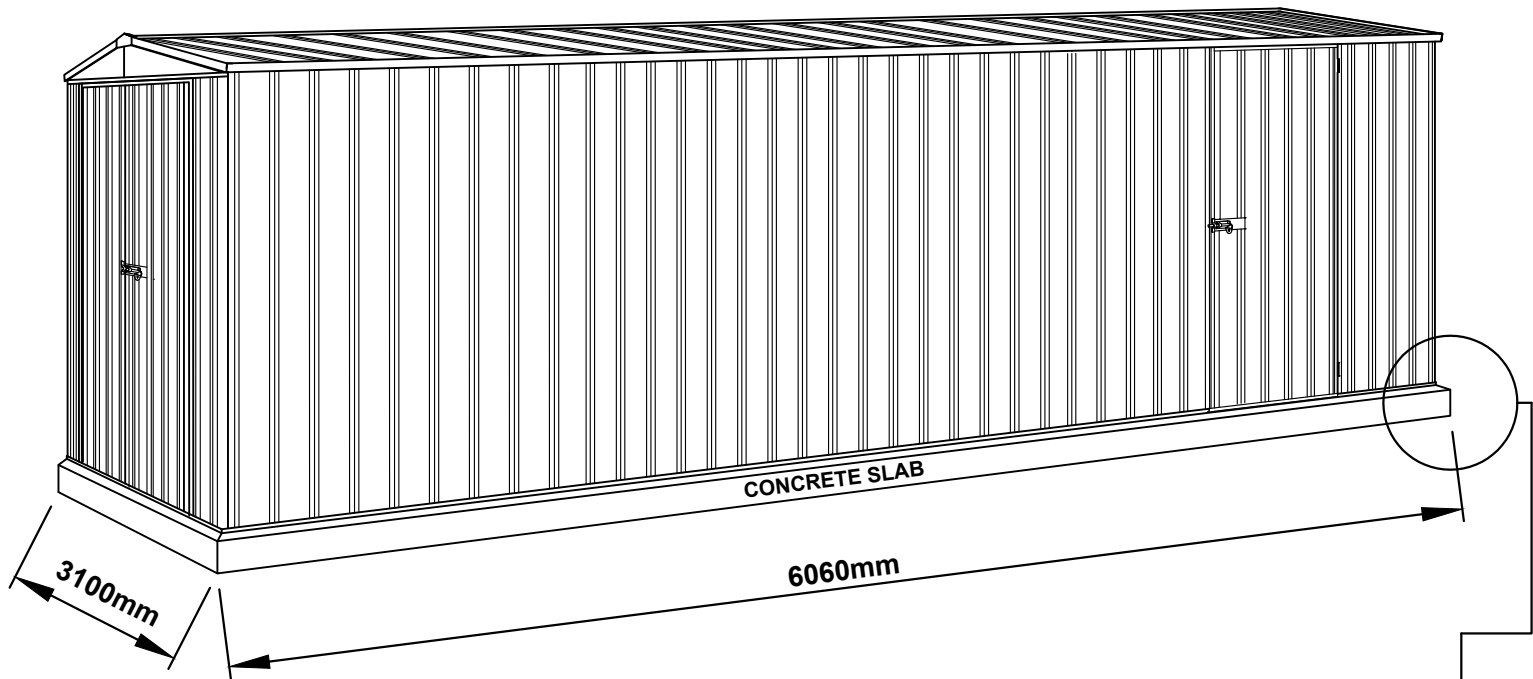

Quality  
ISO 9001

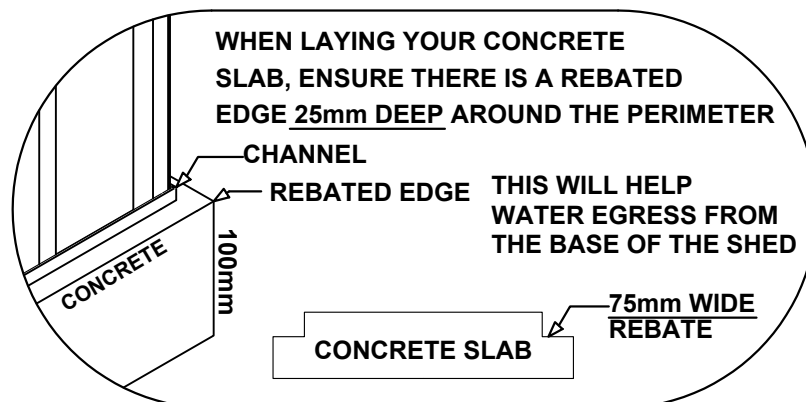

We thank you for choosing an Australian made shed. For further assistance please visit our detailed instructional video library at [Http://www.abscosheds.com.au/watch-videos](http://www.abscosheds.com.au/watch-videos)

At ABSCO Industries we are always looking to be number ONE, so please let us know what you think of our instructions. Feedback makes us better.  
[feedback@absco.com.au](mailto:feedback@absco.com.au)

## SITE PREPARATION

- Local Authority approval must be obtained prior to construction of the shed. Once you have selected your site you will need to lodge a site plan to your local council.
- The site for the shed must be level.
- It is recommended that the shed be set on a 100mm concrete slab and anchored down appropriately (refer page 27 for details).
- Anchor sets are not supplied as standard items with this product.

## GENERAL INSTRUCTIONS

- Before commencing any assembly, read through these instructions in detail to gain a thorough understanding of assembly methods and associated details.
- Unpack the carton and carefully identify and check off all the parts against the parts described and illustrated on the following pages.

## TOOLS REQUIRED





## A NOTE ON SAFETY

- Some parts may have sharp edges. It is advisable to wear gloves when handling these items and safety glasses if drilling holes. Sensible shoes are highly recommended.
- Do not erect your shed in windy conditions, ensure that the shed is securely anchored to a solid foundation immediately after construction is completed.
- It is highly recommended to erect the shed with two or more people.




## SPLIT SHEET 39 INTO 39B SHEETS

- This ABSCO products comes with a perforated sheet (39) that is designed to be split into two smaller sheets (39B)

SPLITTING SHEET 39						
QTY	COMPONENT DESCRIPTION	PART No.		QTY	COMPONENT DESCRIPTION	PART No.
1	 STEEL SHEET 1785mm X 773mm	39	=	2	 STEEL SHEET 1785mm X 329mm	39B

- THESE SHEETS HAVE SHARP EDGES. ONCE SEPARATED PLEASE USE APPROPRIATE FOOT AND HAND PROTECTION WHEN HANDLING.
- In order to split the sheet lay it on the ground and lift and fold one end until the perforations have cleanly snapped.
- Discard the middle piece as scrap when convenient. Fold the scrap piece in half 2-3 times and throw in bin.

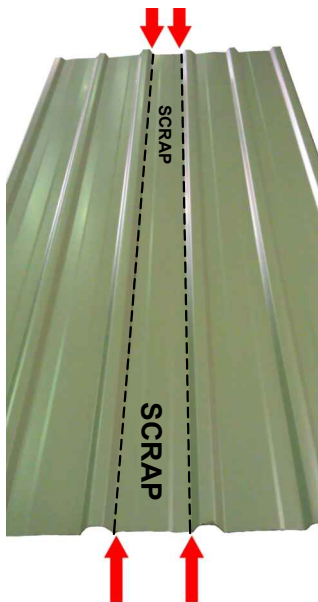

**CHECK SHEET  
FOR  
PERFORATIONS**



**FOLD FIRST  
SECTION OF  
SHEET UNTIL  
FREE**















**FOLD MIDDLE  
SECTION OF  
SHEET UNTIL  
FREE**














**DISCARD MIDDLE  
PIECE**

## COMPONENTS PACKING LIST - CHECK OFF ALL COMPONENTS

MAIN PACK CARTON (PACK 1 OF 3)							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
1	 STEEL SHEET 1915mm X 773mm	36L		2	 STEEL SHEET 1725mm X 711mm	37A	
1	 STEEL SHEET 2045mm X 773mm	38L		1	 STEEL SHEET 1785mm X 731mm	32A	
16	 STEEL SHEET 1546mm X 773mm	45A		1	 STEEL SHEET 1785mm X 731mm	33A	
2	 STEEL SHEET 1725mm X 773mm	25A		2	 STEEL SHEET 1785mm X 329mm	39B	
1	 STEEL SHEET 1725mm X 773mm	B		1	 PEAK BRACE	15A	
1	GABLE L/H L=1475mm 	16L		1	GABLE R/H L=1475mm 	16R	
1	FITTINGS & ACCESSORIES PACKET (SEE PG 4)						















## COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS

FITTINGS & ACCESSORIES PACKET CONTENTS							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
4	 DOOR PADBOLT	22A		400	 SELF TAPPING SCREWS		
3	 DOOR STRAP L: 165mm	12A		18	 3/16 COUNTERSUNK SCREWS & NUTS		
2	 CAP GABLE L: 170mm	14A		8	 3/16 ROUND HEAD BOLTS & NUTS		
3	 RIDGE PLATES	RBP		18	 3mm POP RIVETS		
4	 JAMB L= 75mm	93B		3	DOOR PADBOLT HASP 		
1	ASSEMBLY INSTRUCTIONS			1	 3mm DRILL BIT		










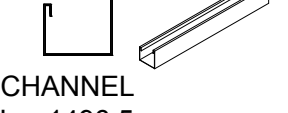
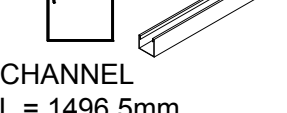
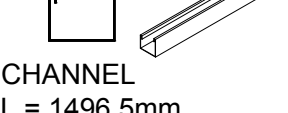
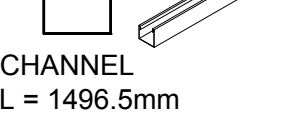
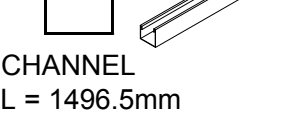
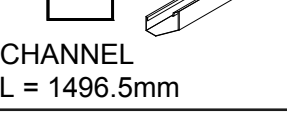
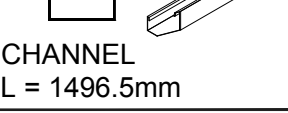

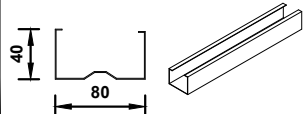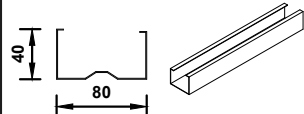
# Absco Utility Shed Model: 3060UTK

## COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS

















MAIN PACK CARTON (PACK 2 OF 3)							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
2	 STEEL SHEET 1915mm X 773mm	36R		10	 STEEL SHEET 1785mm X 773mm	31A	
2	 STEEL SHEET 2045mm X 773mm	38R		1	PORTAL PACK (SEE BELOW)	PF	
3	 STEEL SHEET 1785mm X 773mm	30A		1	3060UTK CHANNEL SET (SEE PGs 7&8)		
PORTAL PACK CONTENTS (80mm X 40mm CHANNEL SECTIONS)							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
2	 CHANNEL L = 1482mm	C1482		2	 CHANNEL L = 1704mm	C1704	
PORTAL FRAME ACCESSORIES							
2	 KNEE PLATE			4	 10mm DYNABOLTS		
2	 APEX PLATE			120	 16mm TEK SCREWS		
2	 MULTI PURPOSE BRACKET			26	 45mm TEK SCREWS		

# Absco Utility Shed Model: 3060UTK
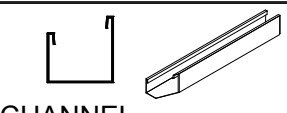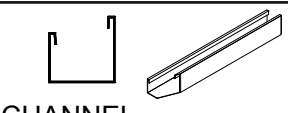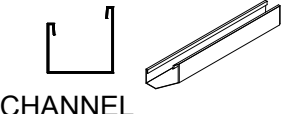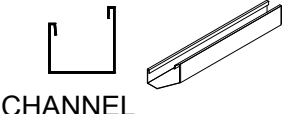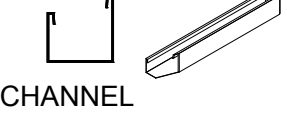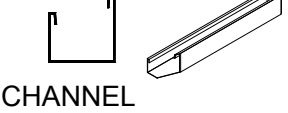
## COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS















MAIN PACK (PACK 2 OF 3) CHANNEL SET							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
18	 CHANNEL JOINER L = 200mm (7.9")	CSJ		2	 RIDGE BEAM JOINER L: 450mm (17.7")	ZARSP	
<div> <div>↓ THESE COMPONENTS ↓</div> <div>ARE TO BE JOINED</div> <div>↓ TO THESE COMPONENTS ↓</div> </div>							
3	 CHANNEL L = 1496.5mm	55BL		3	 CHANNEL L = 1496.5mm	55BR	
1	 CHANNEL L = 1496.5mm	56AL		1	 CHANNEL L = 1496.5mm	56AR	
1	 CHANNEL L = 1496.5mm	56BL		1	 CHANNEL L = 1496.5mm	56BR	
4	 CHANNEL L = 1496.5mm	60AL		4	 CHANNEL L = 1496.5mm	60AR	
1	 CHANNEL L = 1496.5mm	77CL		1	 CHANNEL L = 1496.5mm	77CR	
5	 CHANNEL L = 1496.5mm	81AL		5	 CHANNEL L = 1496.5mm	81AR	
3	 CHANNEL L = 1496.5mm	81BL		3	 CHANNEL L = 1496.5mm	81BR	
2	 RIDGE BEAM L = 1521mm	97AL		2	 RIDGE BEAM L = 1521mm	97AR	

## COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS

MAIN PACK (PACK 2 OF 3) CHANNEL SET (CONT.)							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
3	 CHANNEL WITH HINGES L = 1725mm	58A		3	 JAMB L= 1785mm	89A	
2	 CHANNEL L = 1725mm	58B		1	 JAMB L= 1785mm	89B	
2	 CHANNEL L = 773mm	58C		1	 JAMB L= 1725mm	89C	
4	 CHANNEL L = 1155mm	63A		1	 JAMB L= 788mm	90B	
1	 CHANNEL L = 788mm	79B		2	 JAMB L= 1120mm	91A	
2	 CHANNEL L = 329mm	81M		1	 JAMB L= 1537mm	93L	
1	 CHANNEL L = 1518mm	84L		1	 JAMB L= 797mm	93R	
1	 CHANNEL L = 1518mm	84R		4	 LIP TRIM L= 1546mm	87A	


# Absco Utility Shed Model: 3060UTK

## COMPONENTS PACKING LIST - (CONT.) CHECK OFF ALL COMPONENTS

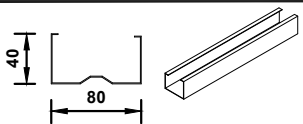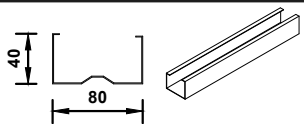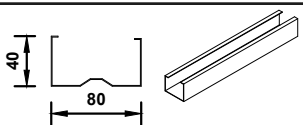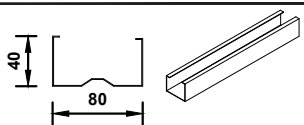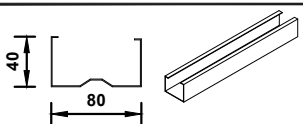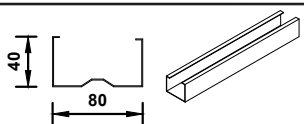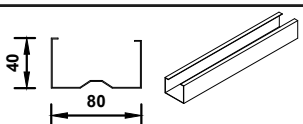FRONT FRAME PACK (PACK 3 OF 3)							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
2	 CHANNEL L = 2300mm	C2300		8	 CHANNEL L = 285mm	K0285	
2	 CHANNEL L = 1820mm	N1820		2	 CHANNEL L = 240mm	C0240	
2	 CHANNEL L = 1785mm	C1785		2	 CHANNEL L = 100mm	C0100	
2	 CHANNEL L = 1484mm	M1484					
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
1	 HAT= 2290mm	99A		1	 SMALL TRIANGULAR PLATE		
4	 HAT= 1350mm	99B		150	 SELF DRILLING 16mm TEK SCREWS		
10	 MULTI PURPOSE BRACKET			1	 PHILLIPS HEAD DRIVER BIT		
6	 10mm DYNABOLTS						


## INSTRUCTIONS FOR JOINING SPLICED CHANNELS

NOTE: THE TEXT MARKED ON ALL PARTS MUST BE SHOWN ON THE SAME SIDE AS EACH OTHER.

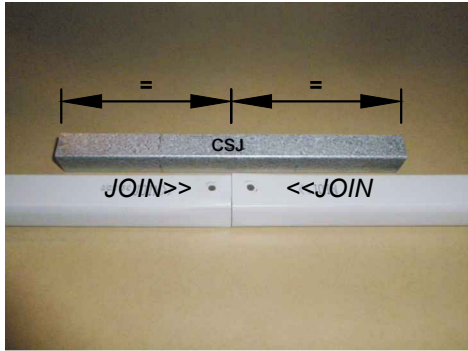



### STEP 1.

Position the channels and the CSJ so the center of the CSJ is in line with the end of each channel to be joined together.

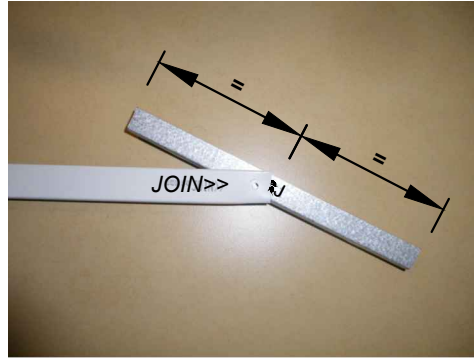


### STEP 2.

Join the first channel to the CSJ by inserting the center of the CSJ (on an angle) to the end of the channel where the JOIN>> text is marked. Push down one side of the CSJ until you hear a 'click'.

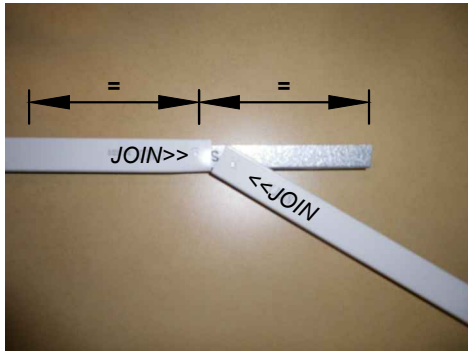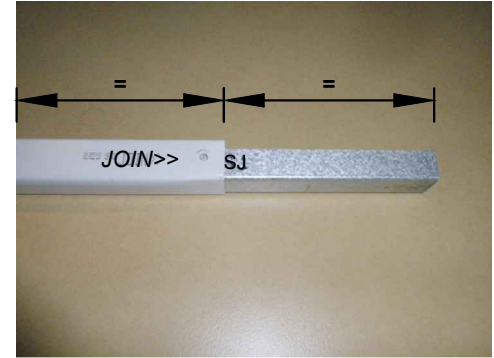

### STEP 3.




Join the second channel to the CSJ by positioning the <<JOIN end of the channel at the center of the CSJ (on an angle). Push the CSJ into the channel until you here a 'click'.

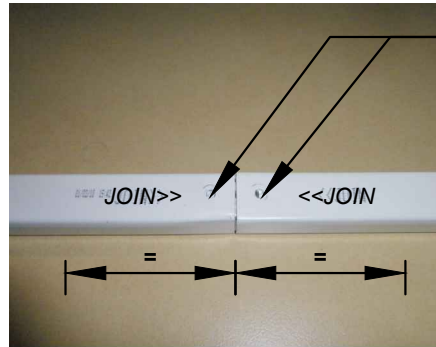

### FINISHED CHANNEL

The joined channels should now look like the picture above with the CSJ positioned equally inside of the joined channels.

DRILL 4mm (0.16") x 3mm (0.12") (2 PER A SIDE) HOLES TO SECURE SECTIONS TOGETHER. (THESE SCREWS MAY HAVE TO BE TEMPORARILY REMOVED AND REPLACED DURING LATER ASSEMBLY)

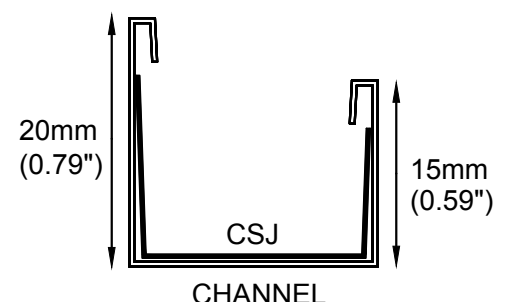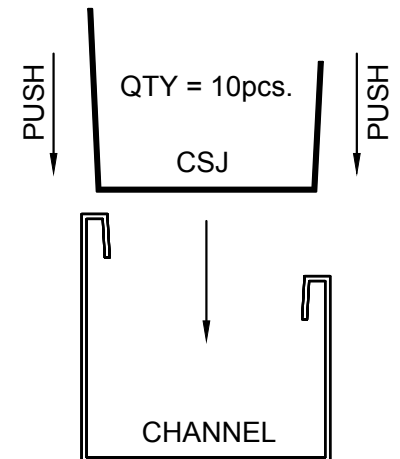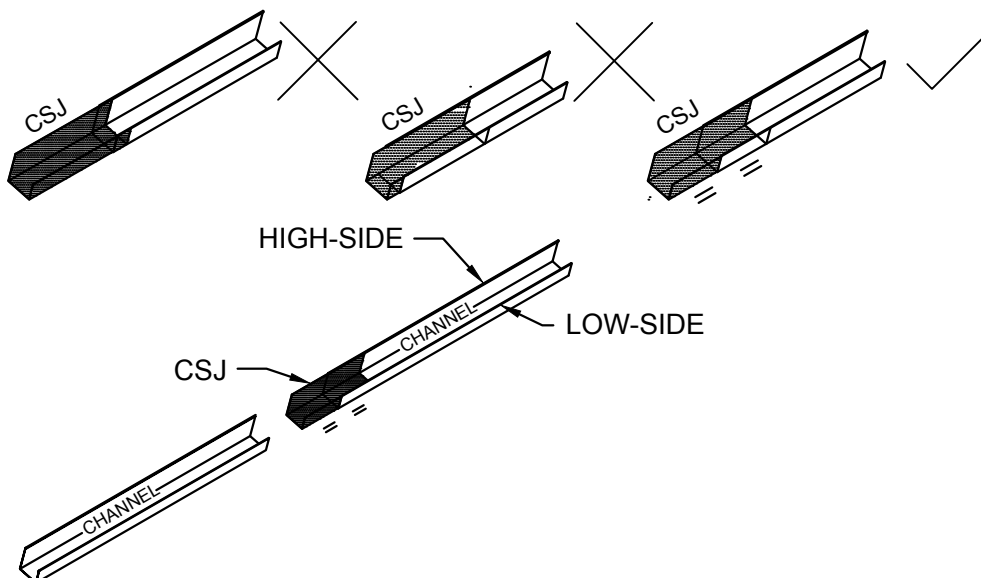




## STEP 1. PRE-ASSEMBLY OF SPLICED CHANNELS




**NOTE:** JOIN TOGETHER 36 X CHANNEL SECTIONS USING 18 X CHANNEL JOINERS (PART CSJ)

**NOTE:** SOME CHANNELS HAVE HOLES IN THEM - YOU WILL NEED TO RE-DRILL HOLES ON ANY CHANNEL WHERE THE CSJ JOINING CHANNEL COVERS HOLES ON THE CHANNELS YOU ARE CONNECTING

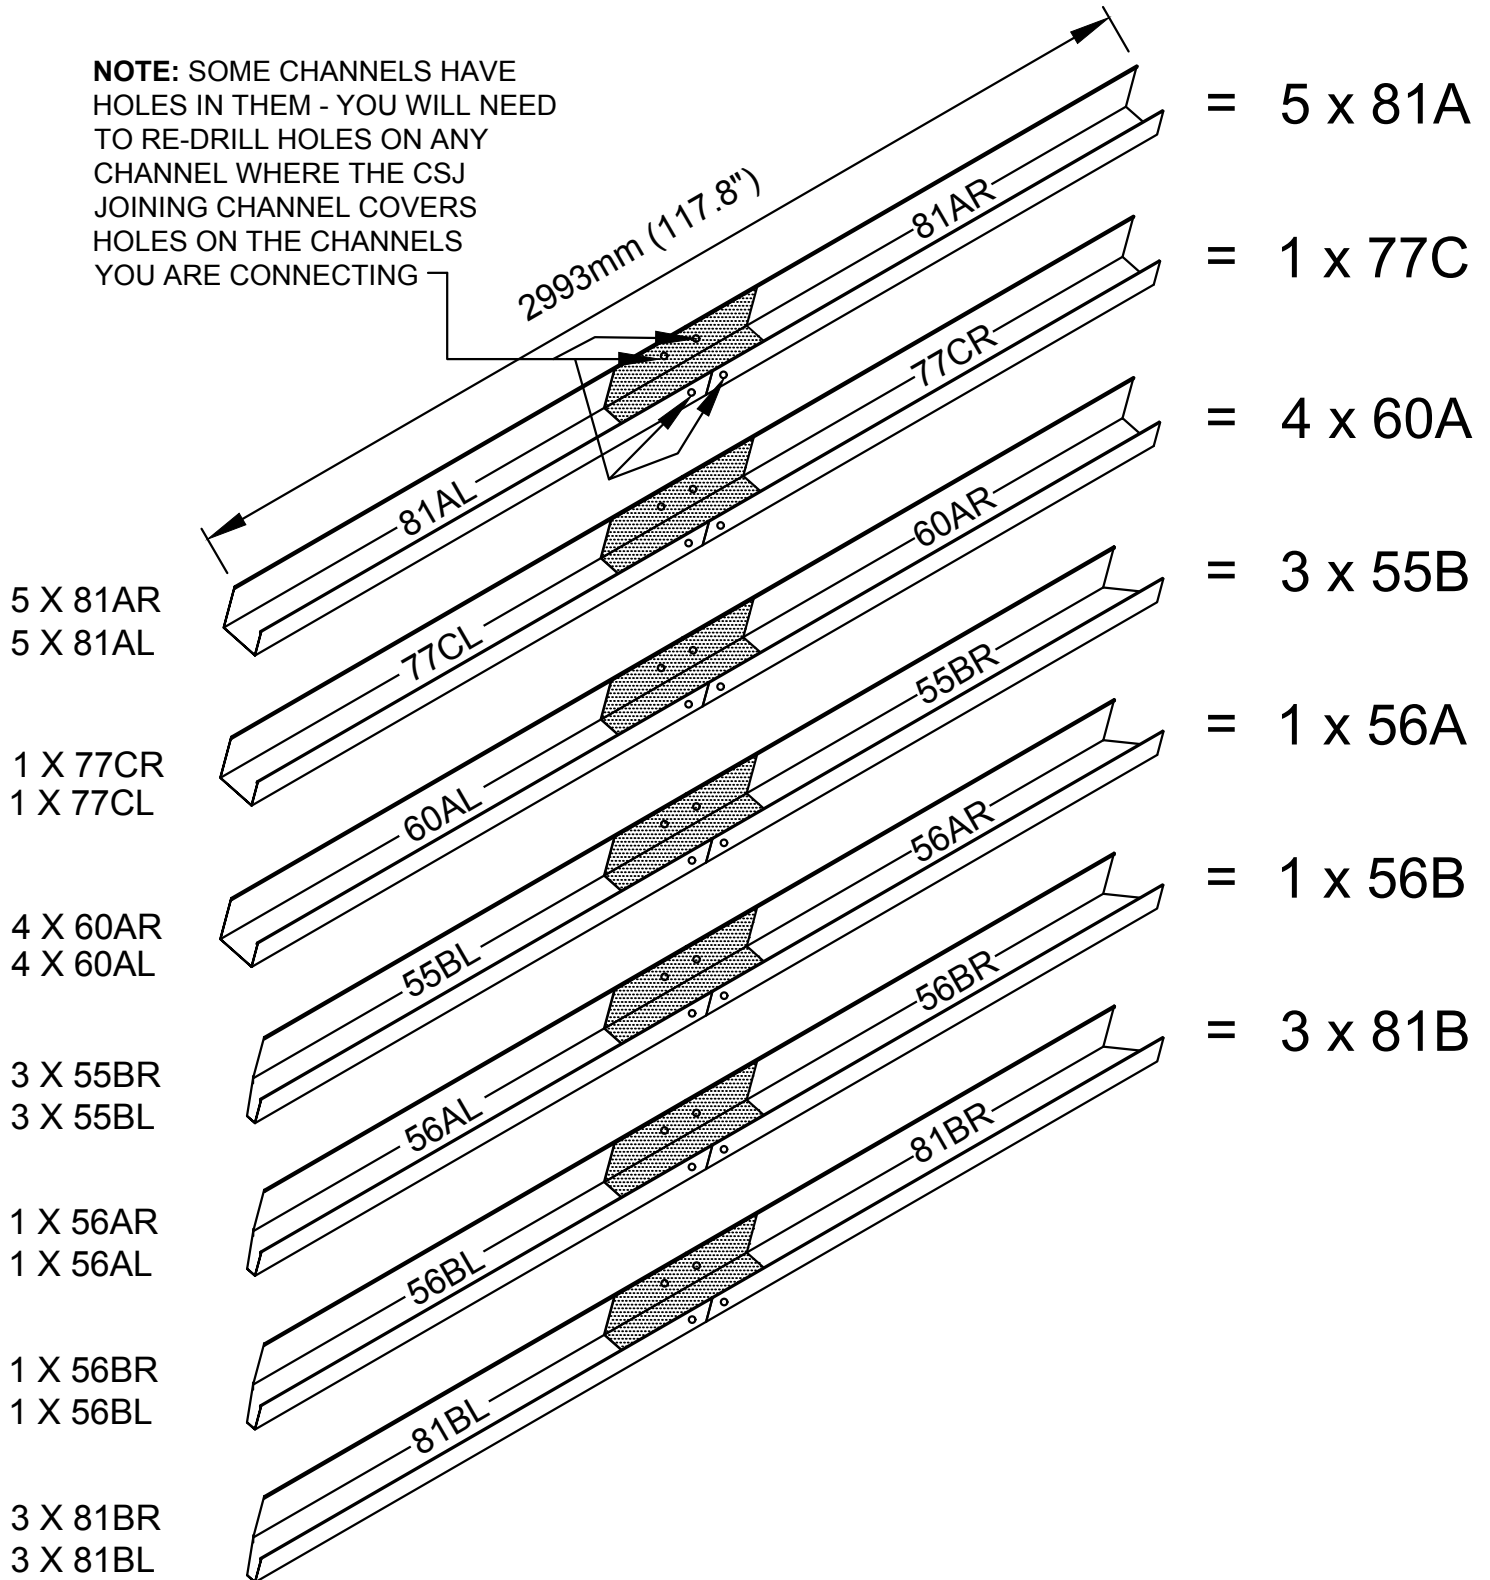


## INSTRUCTIONS FOR JOINING SPLICED RIDGE BEAM

**STAGE 1: PUSH RIDGE BEAMS TOGETHER, MAKE SURE THERE IS A 50mm OVERLAP OF THE RIDGE CAP**

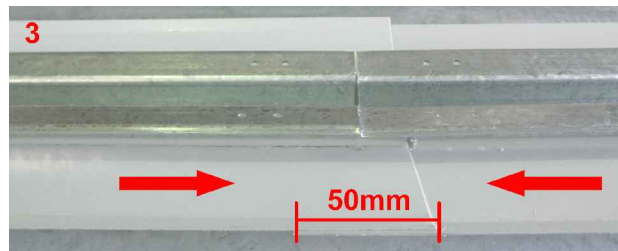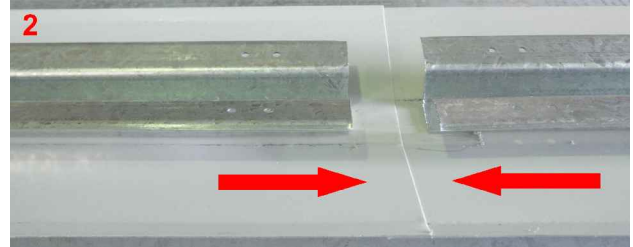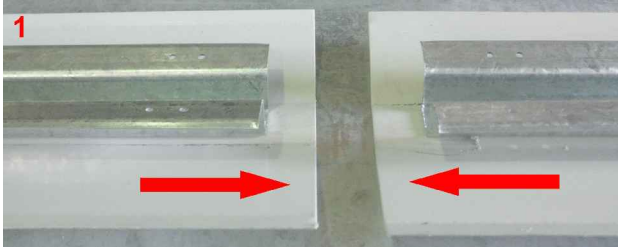

**STAGE 2: INSERT RIDGE CAP JOINER INTO CONNECTED RIDGE CAPS. MAKE SURE JOINER HAS 225mm IN EACH RIDGE CAP.**

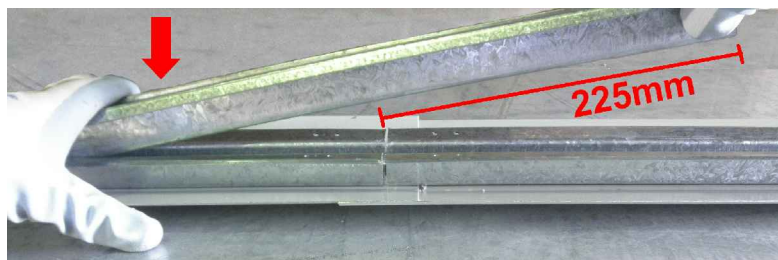


**STAGE 3: TURN RIDGE CAP OVER AND MEASURE 250mm FROM THE END OF EACH RIDGE CAP. PLACE TEK SCREWS IN 50mm INCREMENTS FROM SAID END. REPEAT THIS PROCESS FOR THE OPPOSING HALF OF RIDGE BEAM**



## STEP 2. PRE-ASSEMBLY OF SPLICED RIDGE BEAM

QTY. = 1




TEK SCREW DRIVER BIT

QTY. = 8




SELF DRILLING TEK SCREW

QTY. = 2

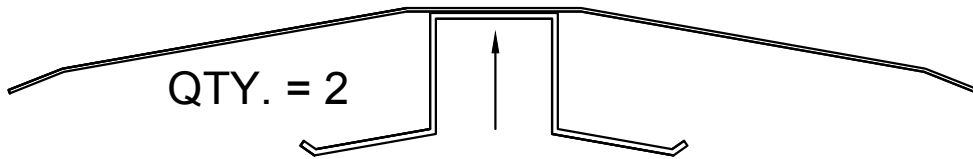


RIDGE BEAM 1521mm (59.9")  
PARTS 97AL & 97AR


QTY. = 1




PART ZARSP - 450mm (17.7") LONG

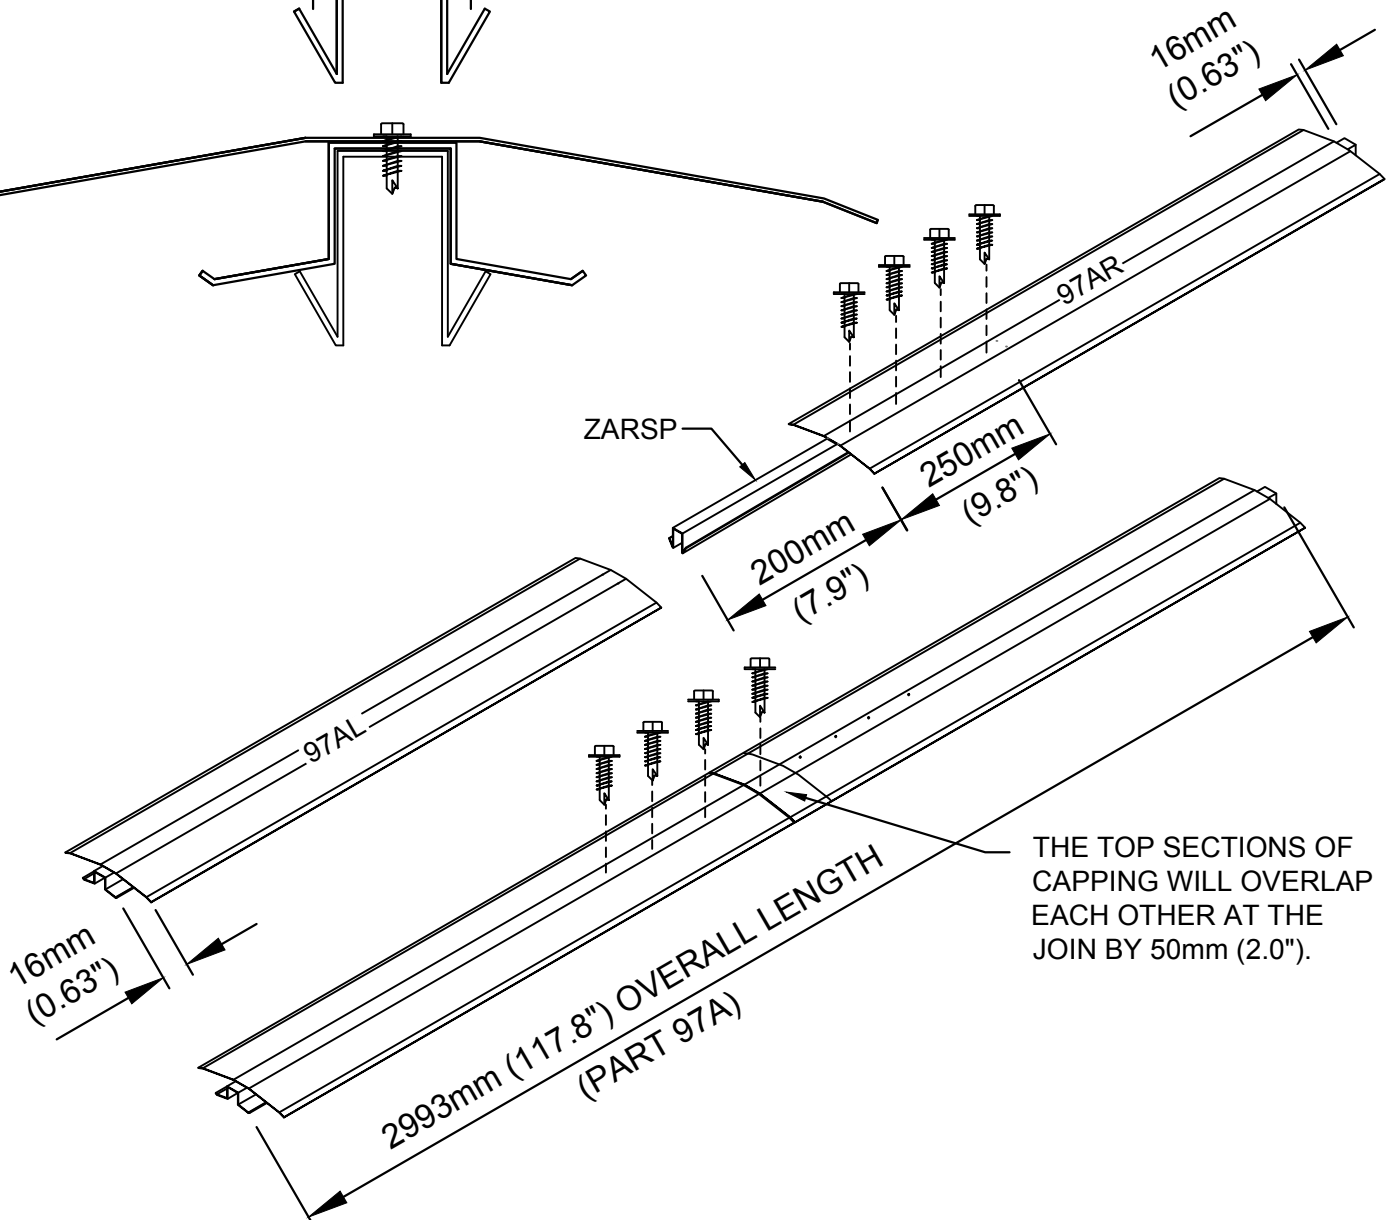


## JOINING RIDGE BEAMS




USING A HACKSAW, REMOVE THE PROTRUDING SECTION OF EACH RIDGE BEAM.

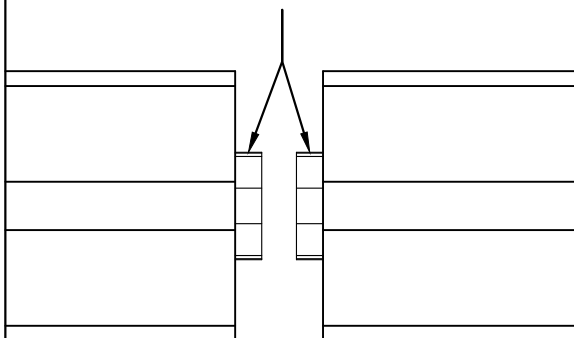

THIS WILL ALLOW THE TWO SECTIONS TO BUTT UP NEATLY TO EACH OTHER.

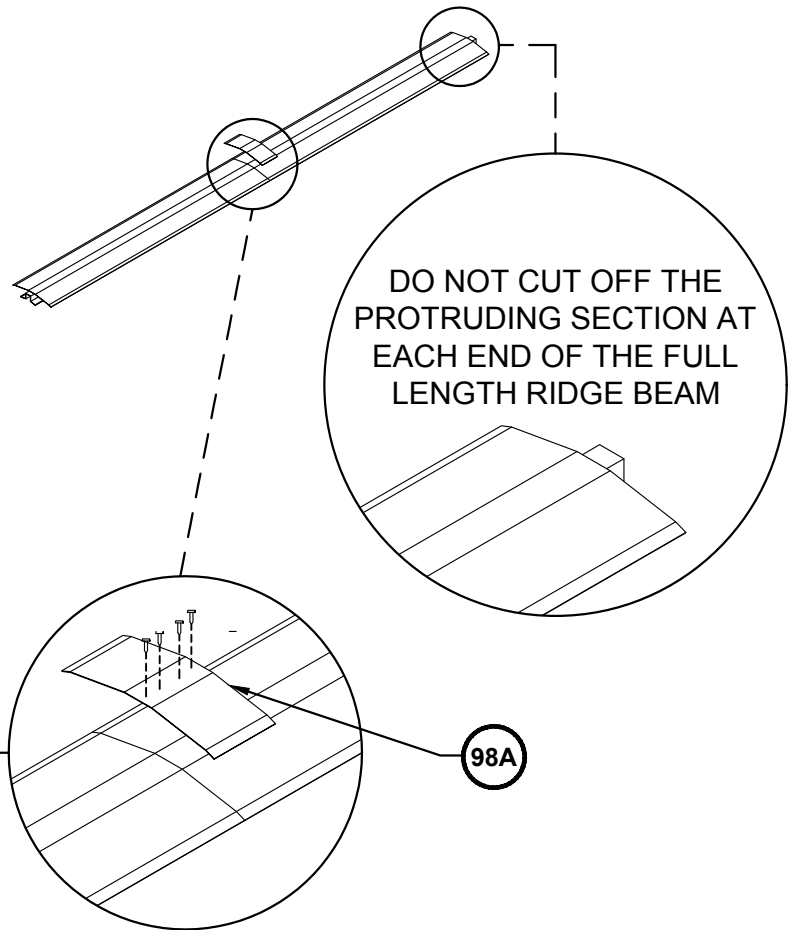


## JOINING WALL & ROOF PANELS

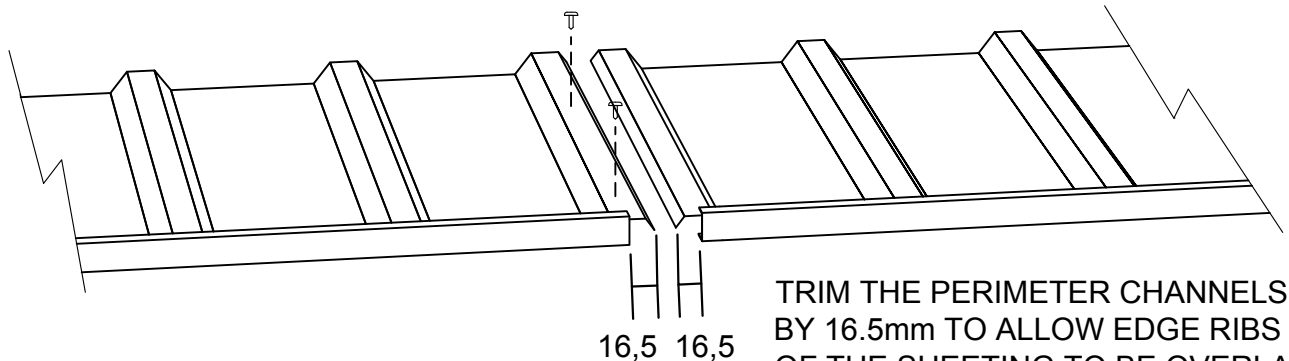


TRIM THE PERIMETER CHANNELS BY 16.5mm TO ALLOW EDGE RIBS OF THE SHEETING TO BE OVERLAPPED.

## FRONT AND CENTRE FRAME ASSEMBLY


THERE ARE TWO FRAMES TO BE ASSEMBLED, ONE TO SUPPORT THE DOORS IN THE FRONT, AND ONE TO SUPPORT THE ROOF AND WALL PANELS AT THE CENTRE OF THE SHED. THESE ARE SOME OF THE COMPONENTS USED.



**GALVANISED CHANNEL**  
80 mm X 40 mm




**MULTIPURPOSE BRACKET**  
45 mm X 45 mm X 80 mm



**DOOR STIFFENER  
TOP HAT SECTION**




**VIEW OF ROOF COMPONENTS**

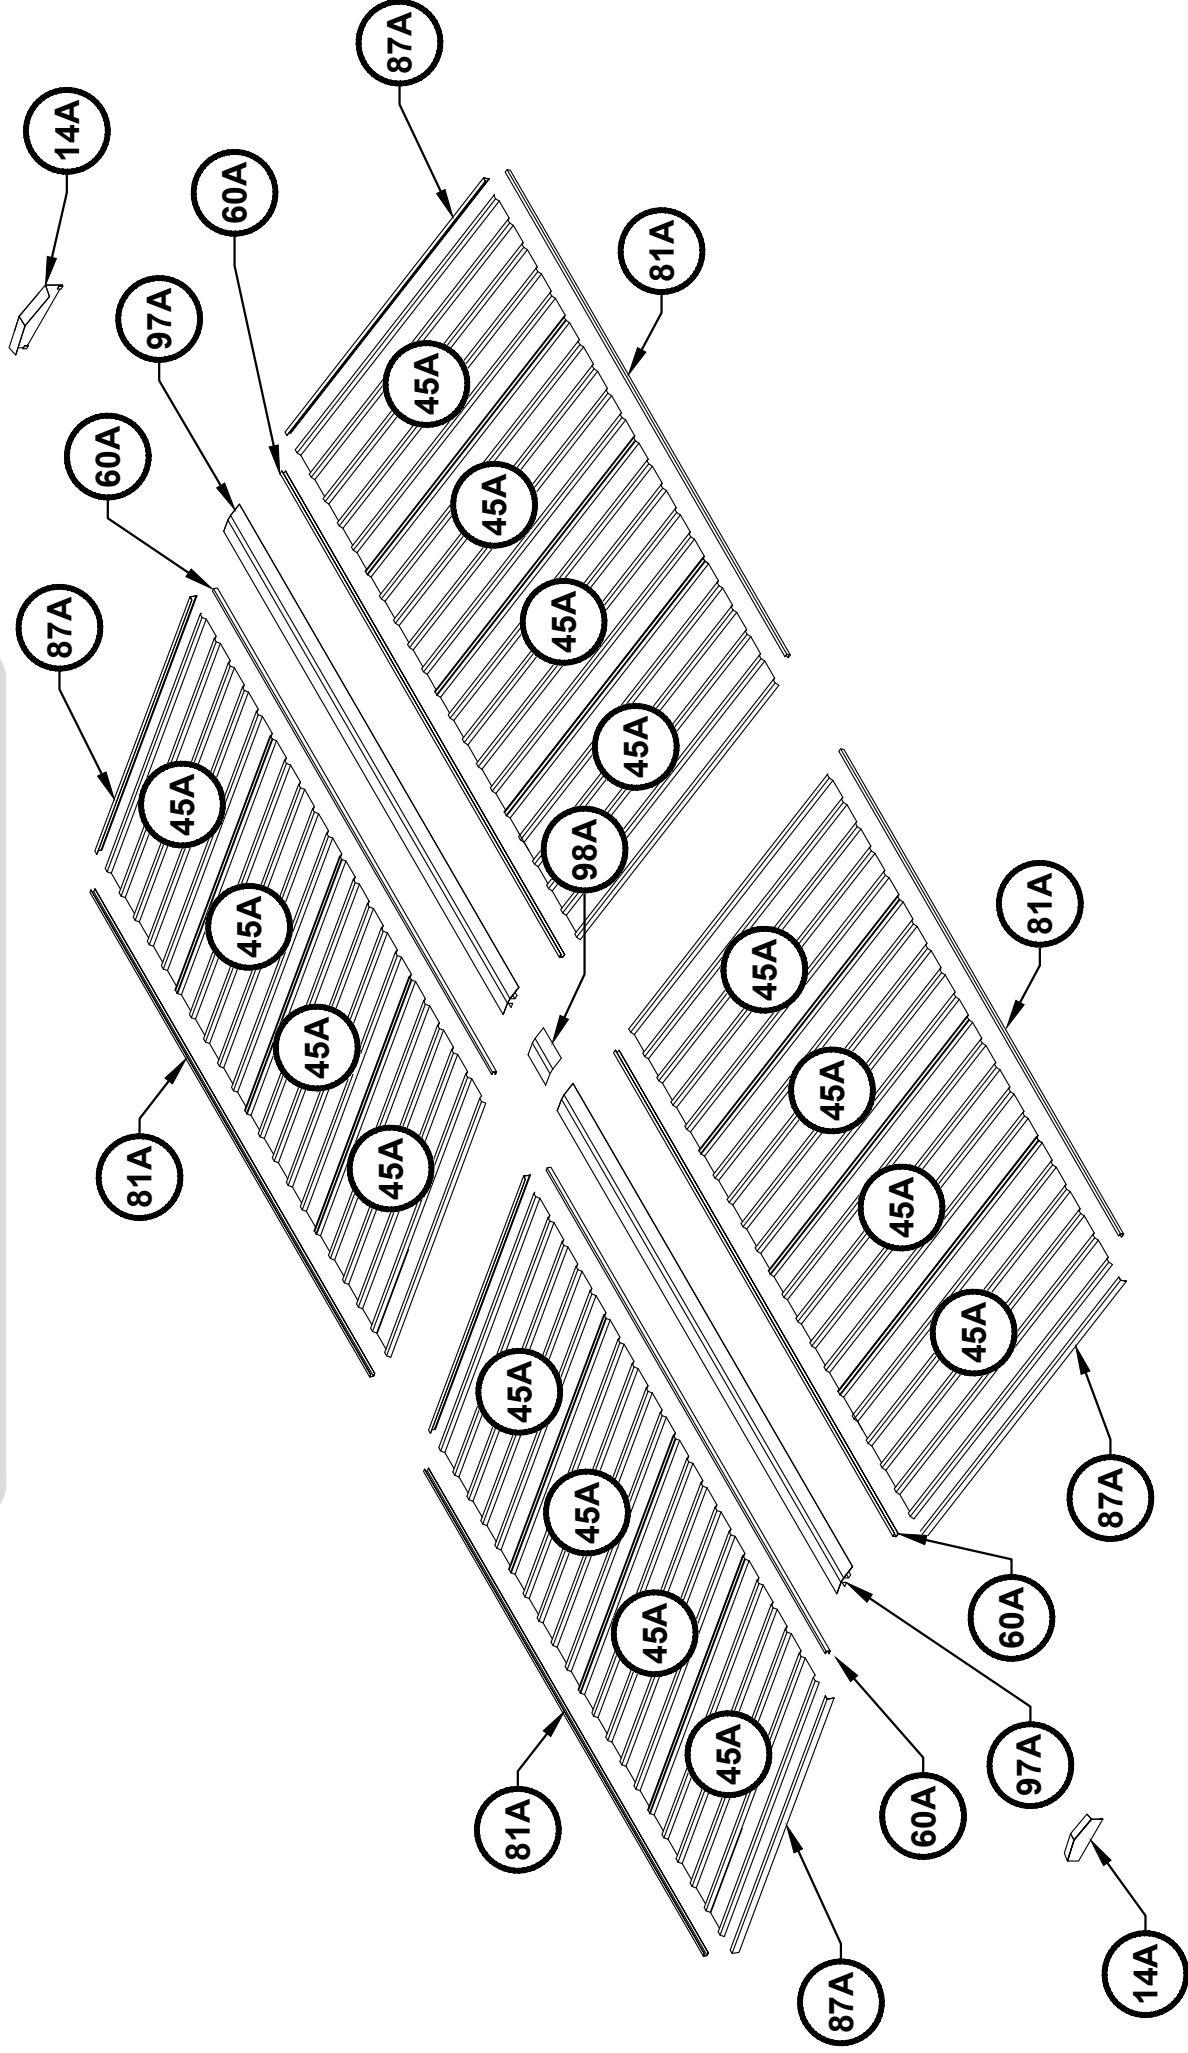

NOTE: SOME COMPONENTS ARE IDENTICAL EXCEPT FOR PRE-PUNCHED HOLE LOCATIONS. TAKE CARE WHEN ASSEMBLING COMPONENTS, ENSURING THAT THE PART NUMBERS MARKED ON EACH COMPONENT MATCH THOSE NOTED IN EACH STAGE OF THESE INSTRUCTIONS.

LAY OUT ALL PARTS AS ILLUSTRATED TO FAMILIARISE YOURSELF WITH COMPONENT IDENTIFICATION AND THEIR INTENDED LOCATIONS.

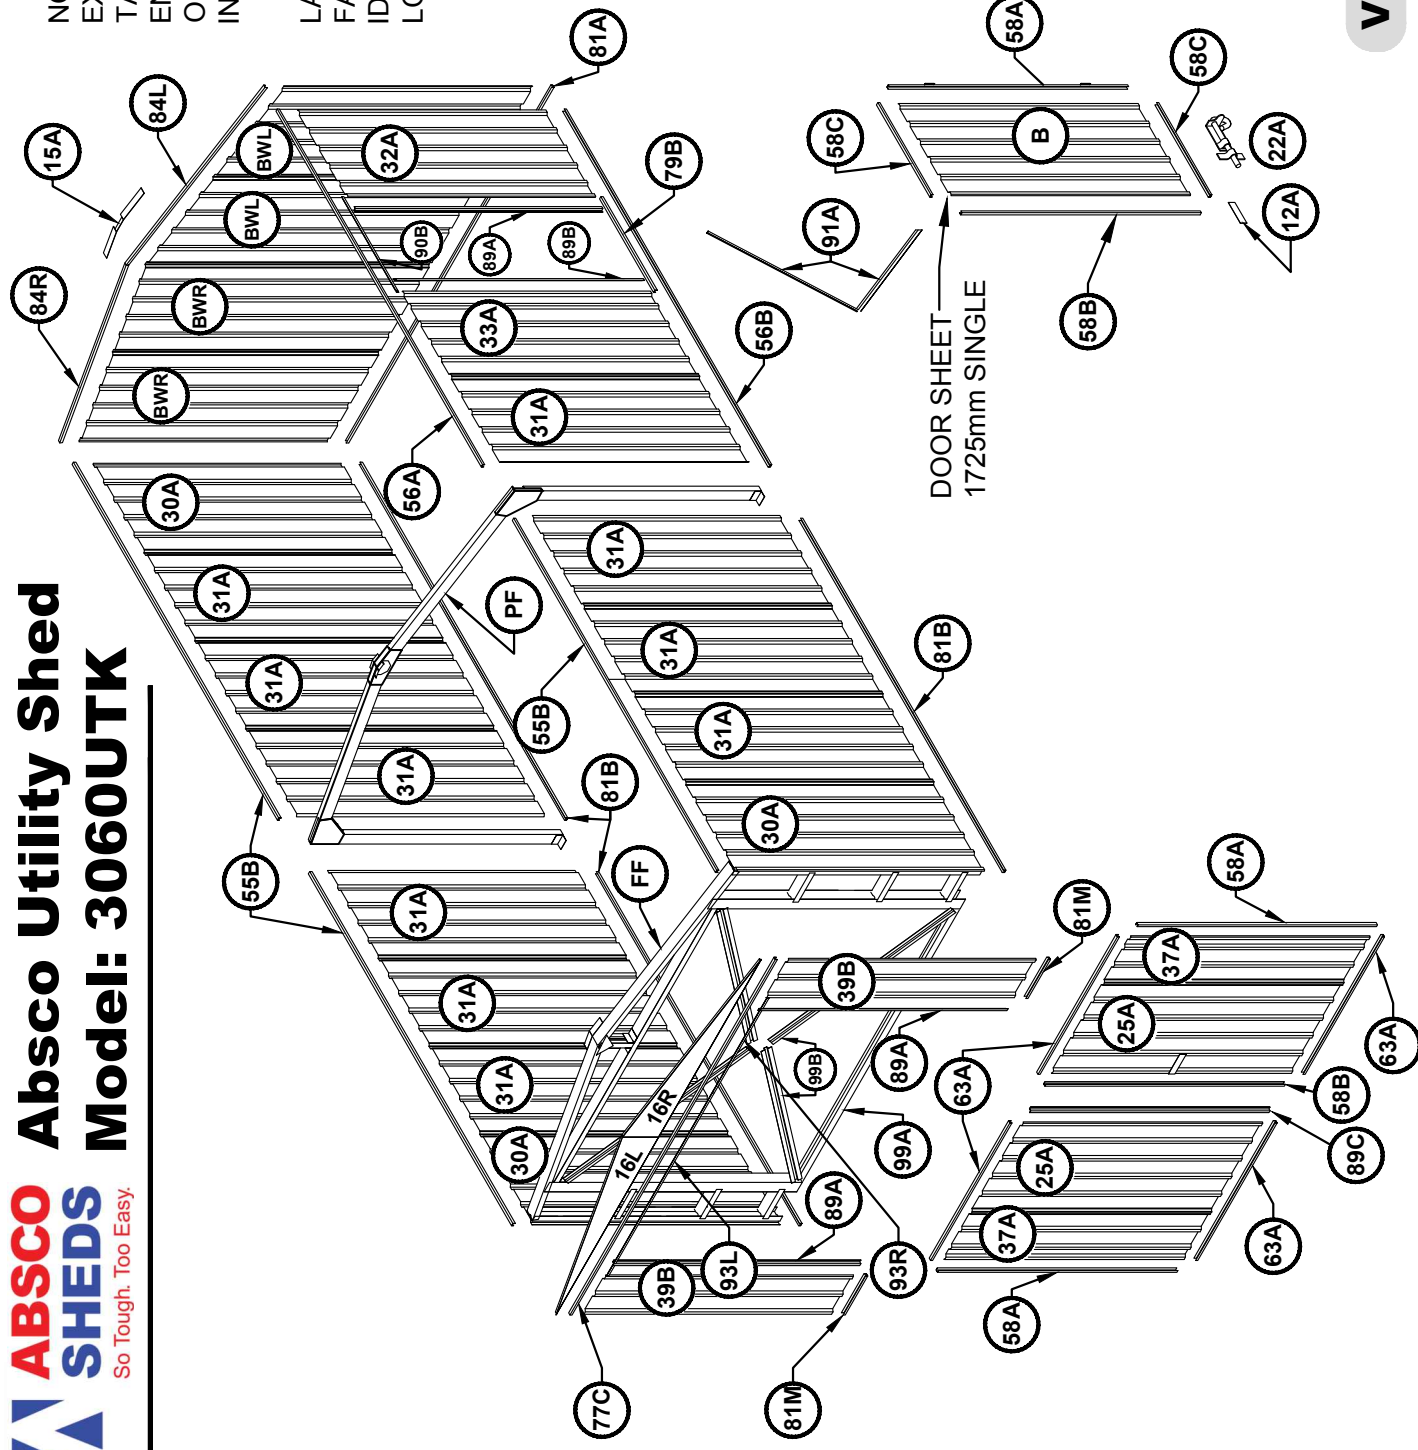


## VIEW OF WALL COMPONENTS










## ABSCO ASSEMBLY INTRODUCTION

The snap-tite assembly system locks all perimeter channels to all roof and wall sheets without the need for tools and fasteners.

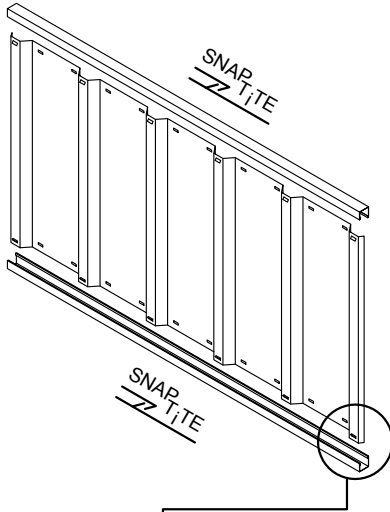


To pre-assemble the four wall panels and two roof panels, the perimeter channels are secured to the top and bottom of each panel using the snap-tite system, as detailed on the following pages wherever you see the symbol.

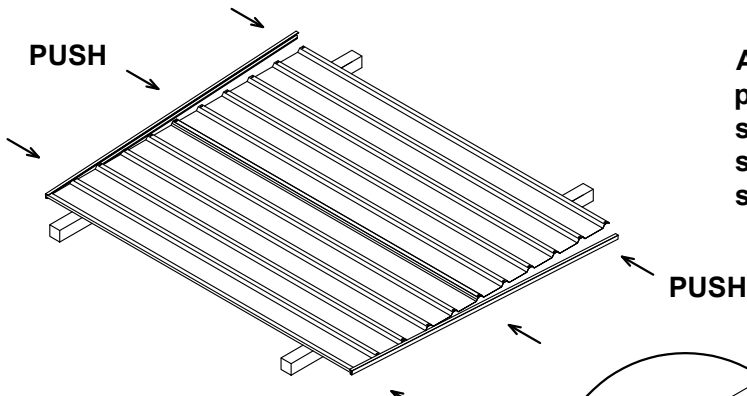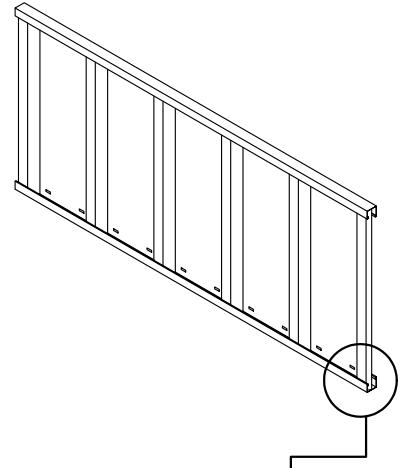


After joining sheets together, position channel over one end of the sheets, gently tapping it over the snap-tite lugs, working along the sheets to the other end.

Position sheets on timbers, trestles or partly over edge of concrete slab.




Each perimeter channel must finish flush with the edges of the sheets. the snap-tite system allows adjustment for this process by simply tapping the channel along the sheets until each end is neatly flush.

## FASTENING SYMBOLS



Join components together with one screw at this location only, as some channel sections have extra holes that are not required for this model of garden shed



Do not join components together at this location yet, as the screw may obstruct further assembly of other components



3mm POP RIVETS



4mm NUT & BOLT SET







SELF DRILLING TEK SCREW  
FOR JOINING PORTAL FRAME  
COMPONENTS

## SIDE PANEL ASSEMBLY

**(One Required)**

TRIM THE TIP OF EACH SHEET  
OR BEND OUT OF THE WAY TO  
ALLOW CHANNELS TO FIT HARD  
UP TO THE EDGE OF THE  
SHEET

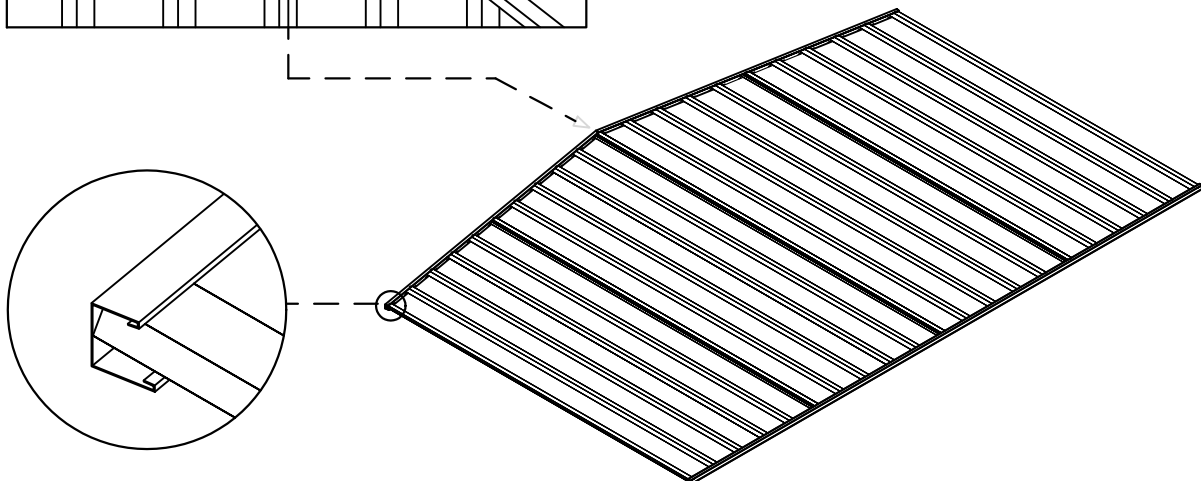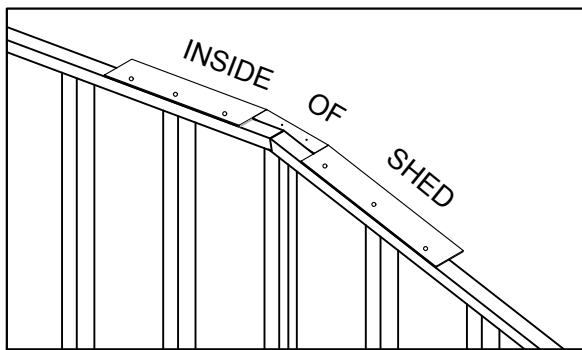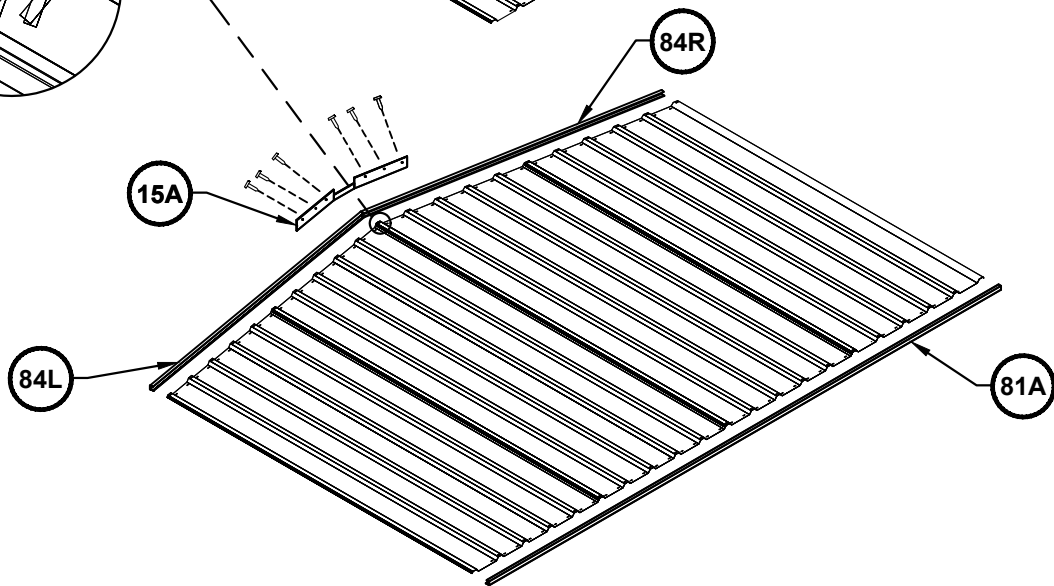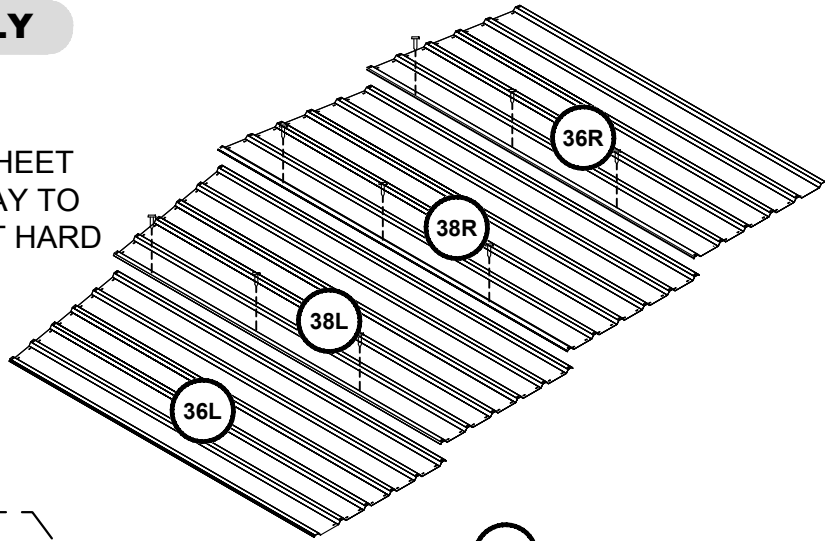


## SIDE PANEL ASSEMBLY

(Three Required)






### ONE REQUIRED

SHEET TYPE 30A  
THIS END

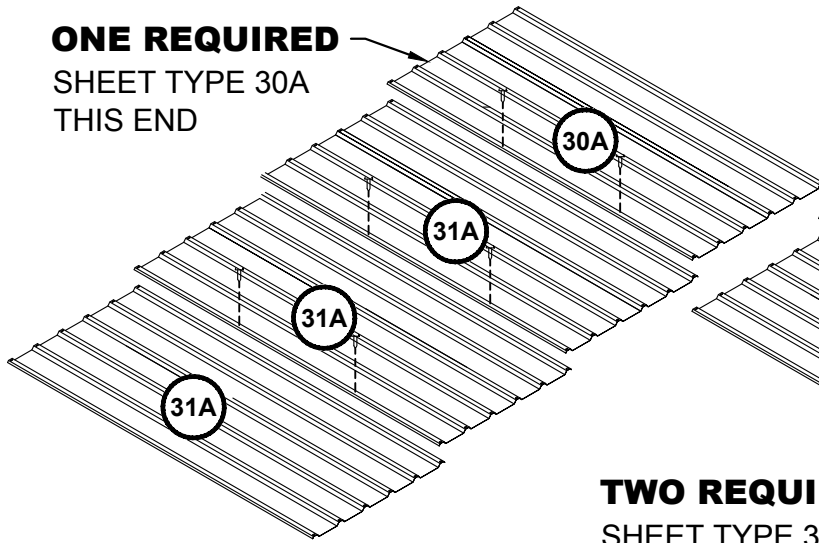


### TWO REQUIRED

SHEET TYPE 30A  
THIS END

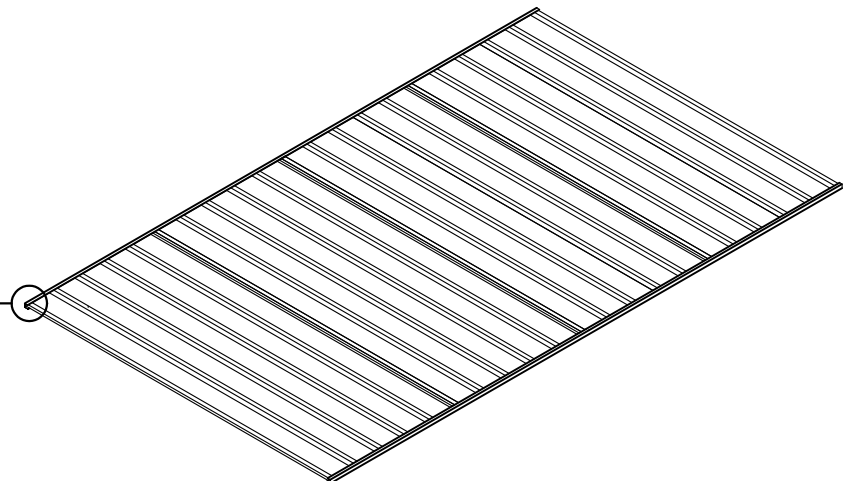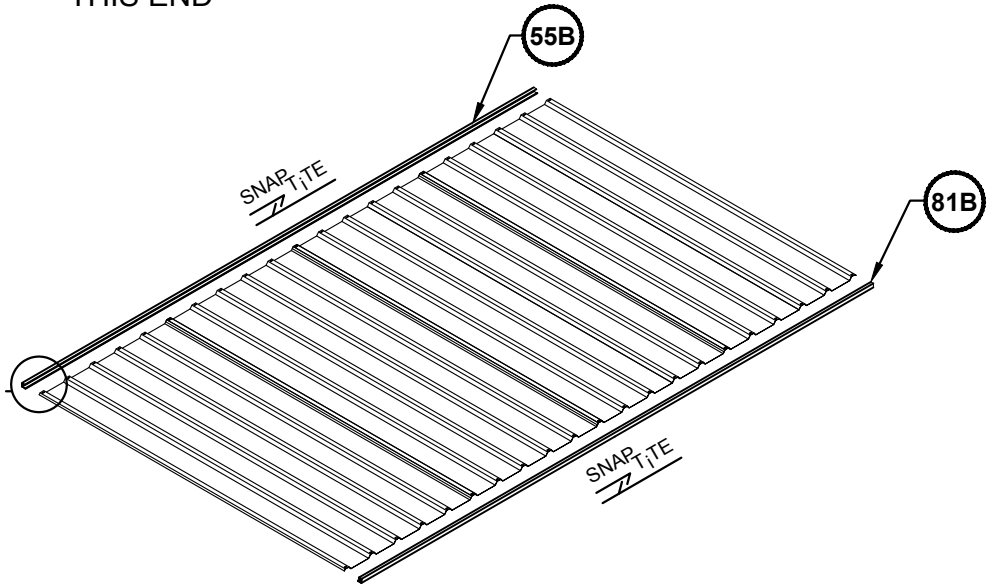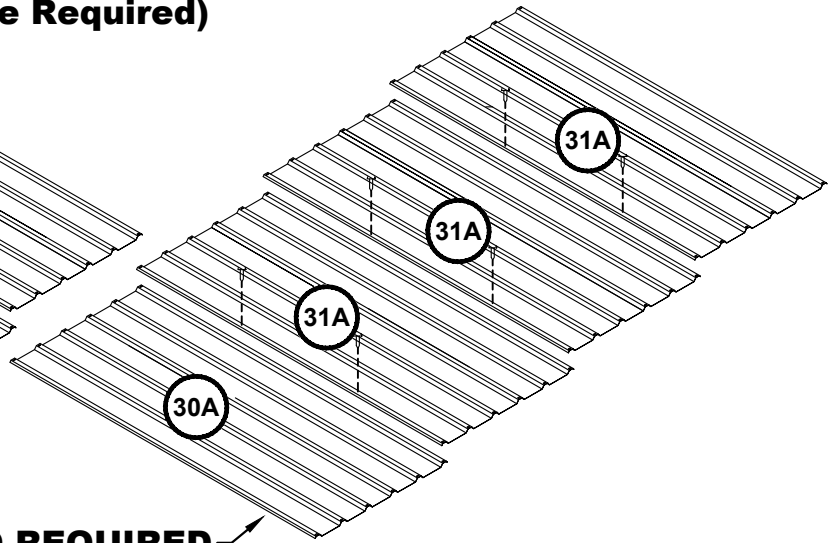


## SIDE PANEL ASSEMBLY

### SINGLE DOOR

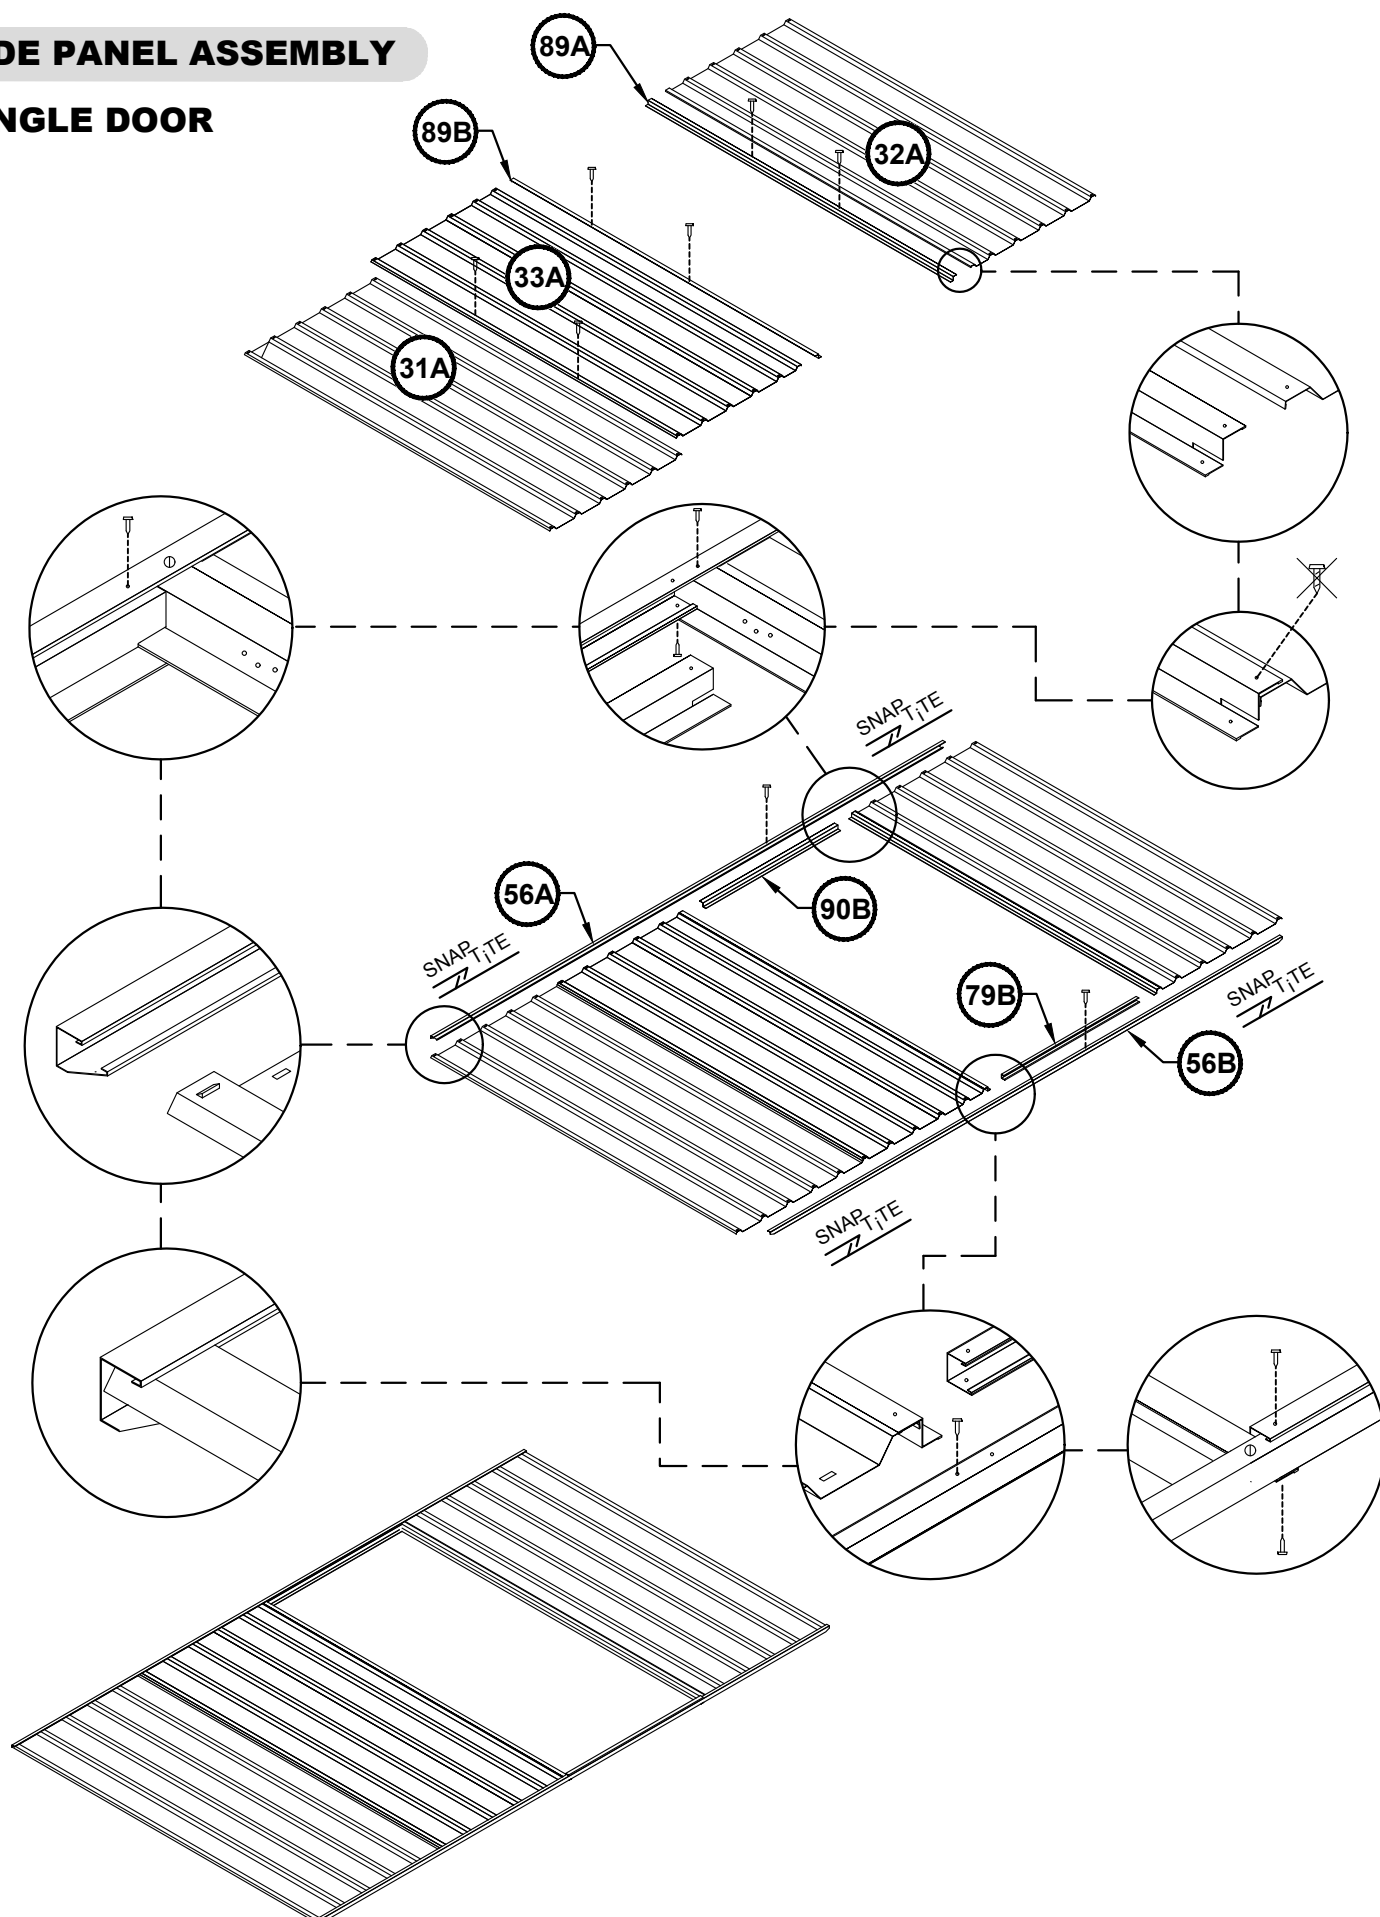

## ROOF PANEL ASSEMBLY

(4 Required)

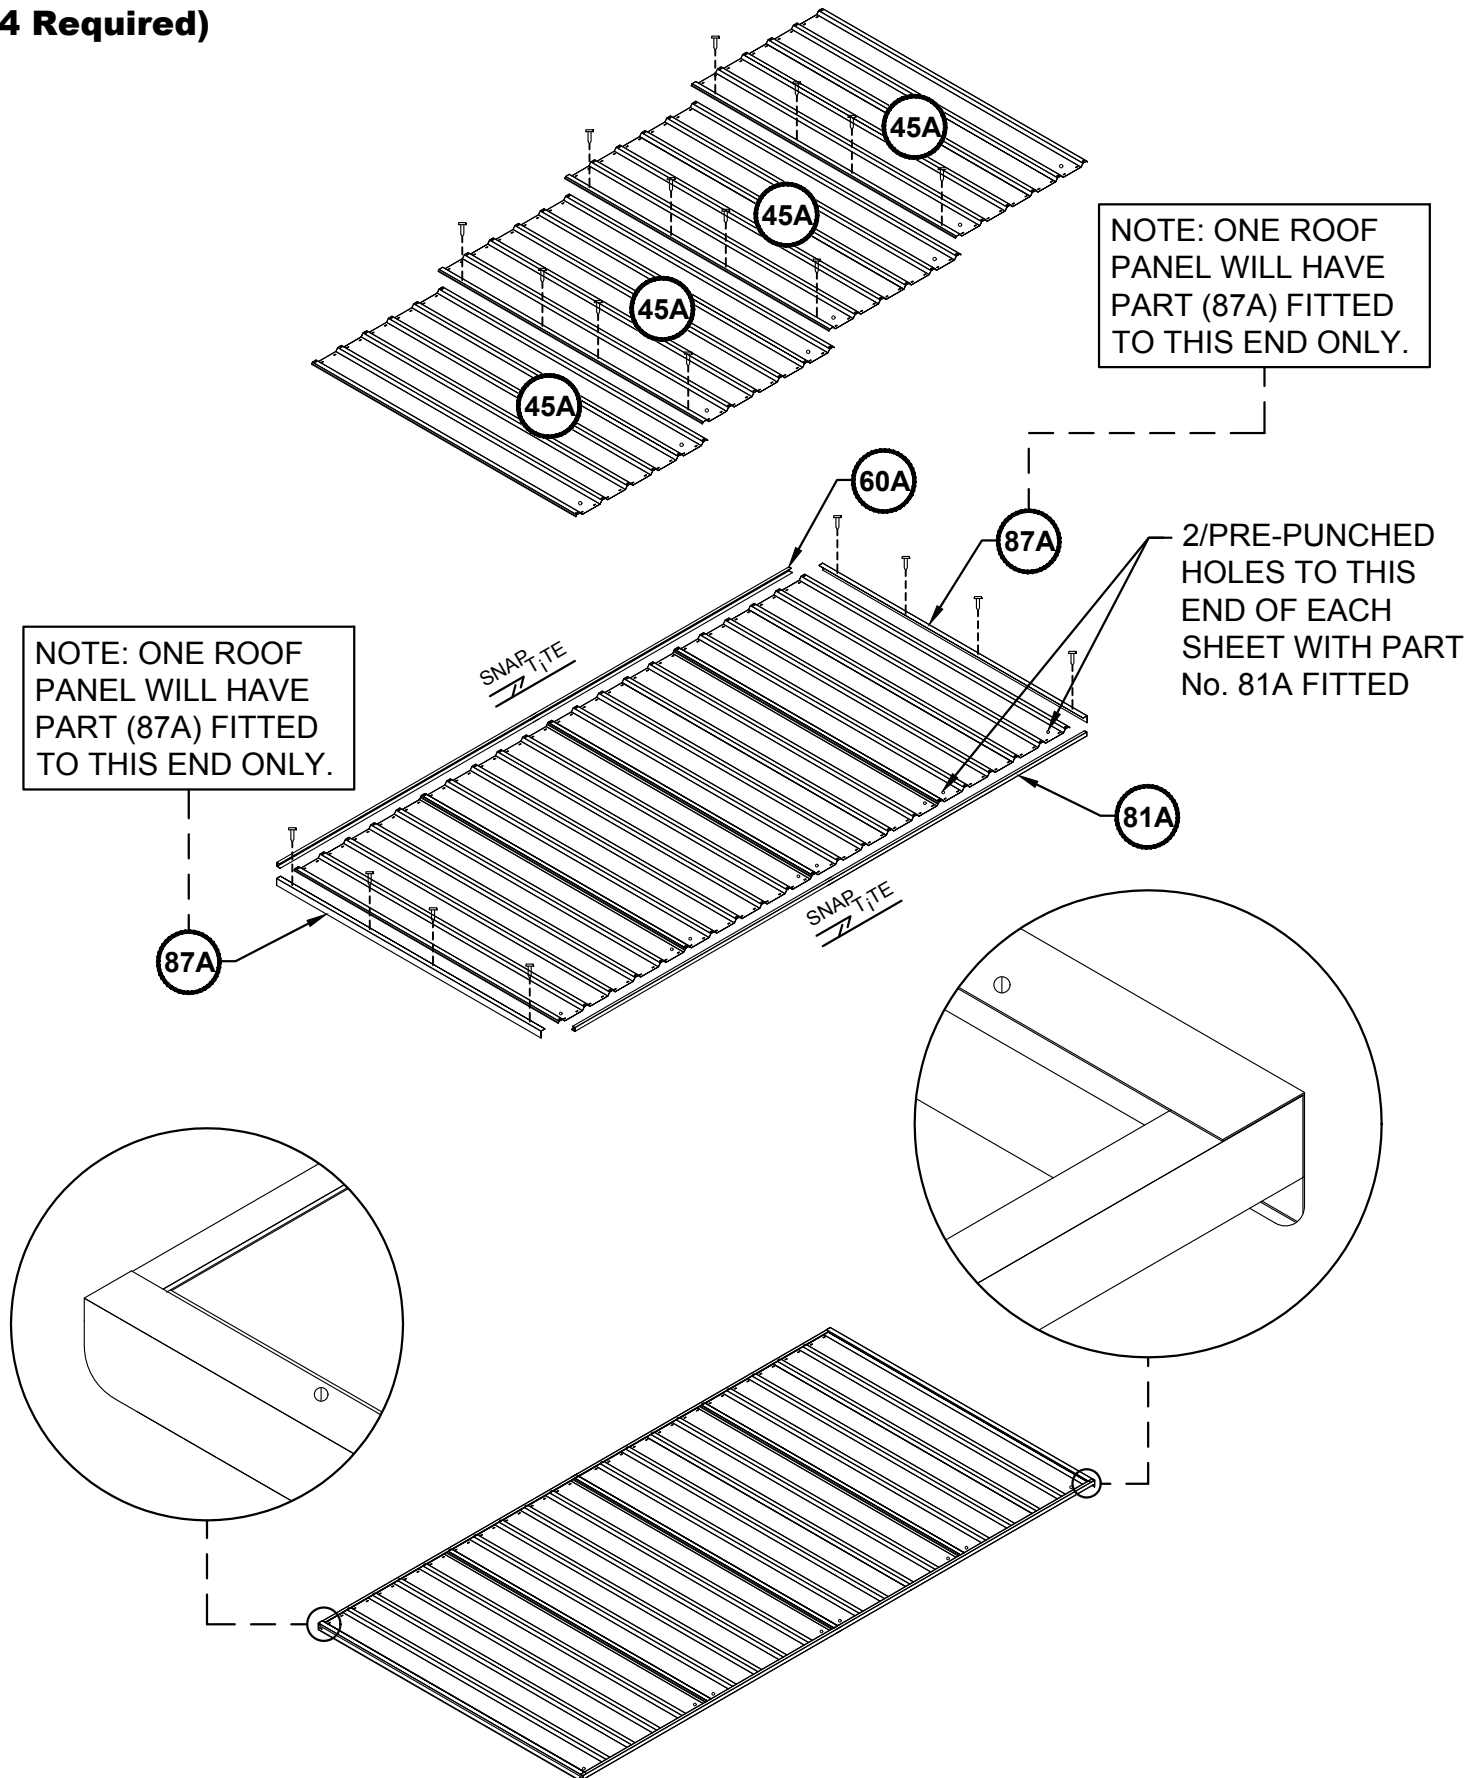




## DOOR PANEL ASSEMBLY

### SINGLE DOOR (ONE REQUIRED)

1725mm SINGLE  
DOOR SHEET  
(FULLY  
PRE-PUNCHED)

### FRONT DOORS (TWO REQUIRED)


NOTE: THESE SHEETS  
HAVE NOT BEEN  
PRE-PUNCHED

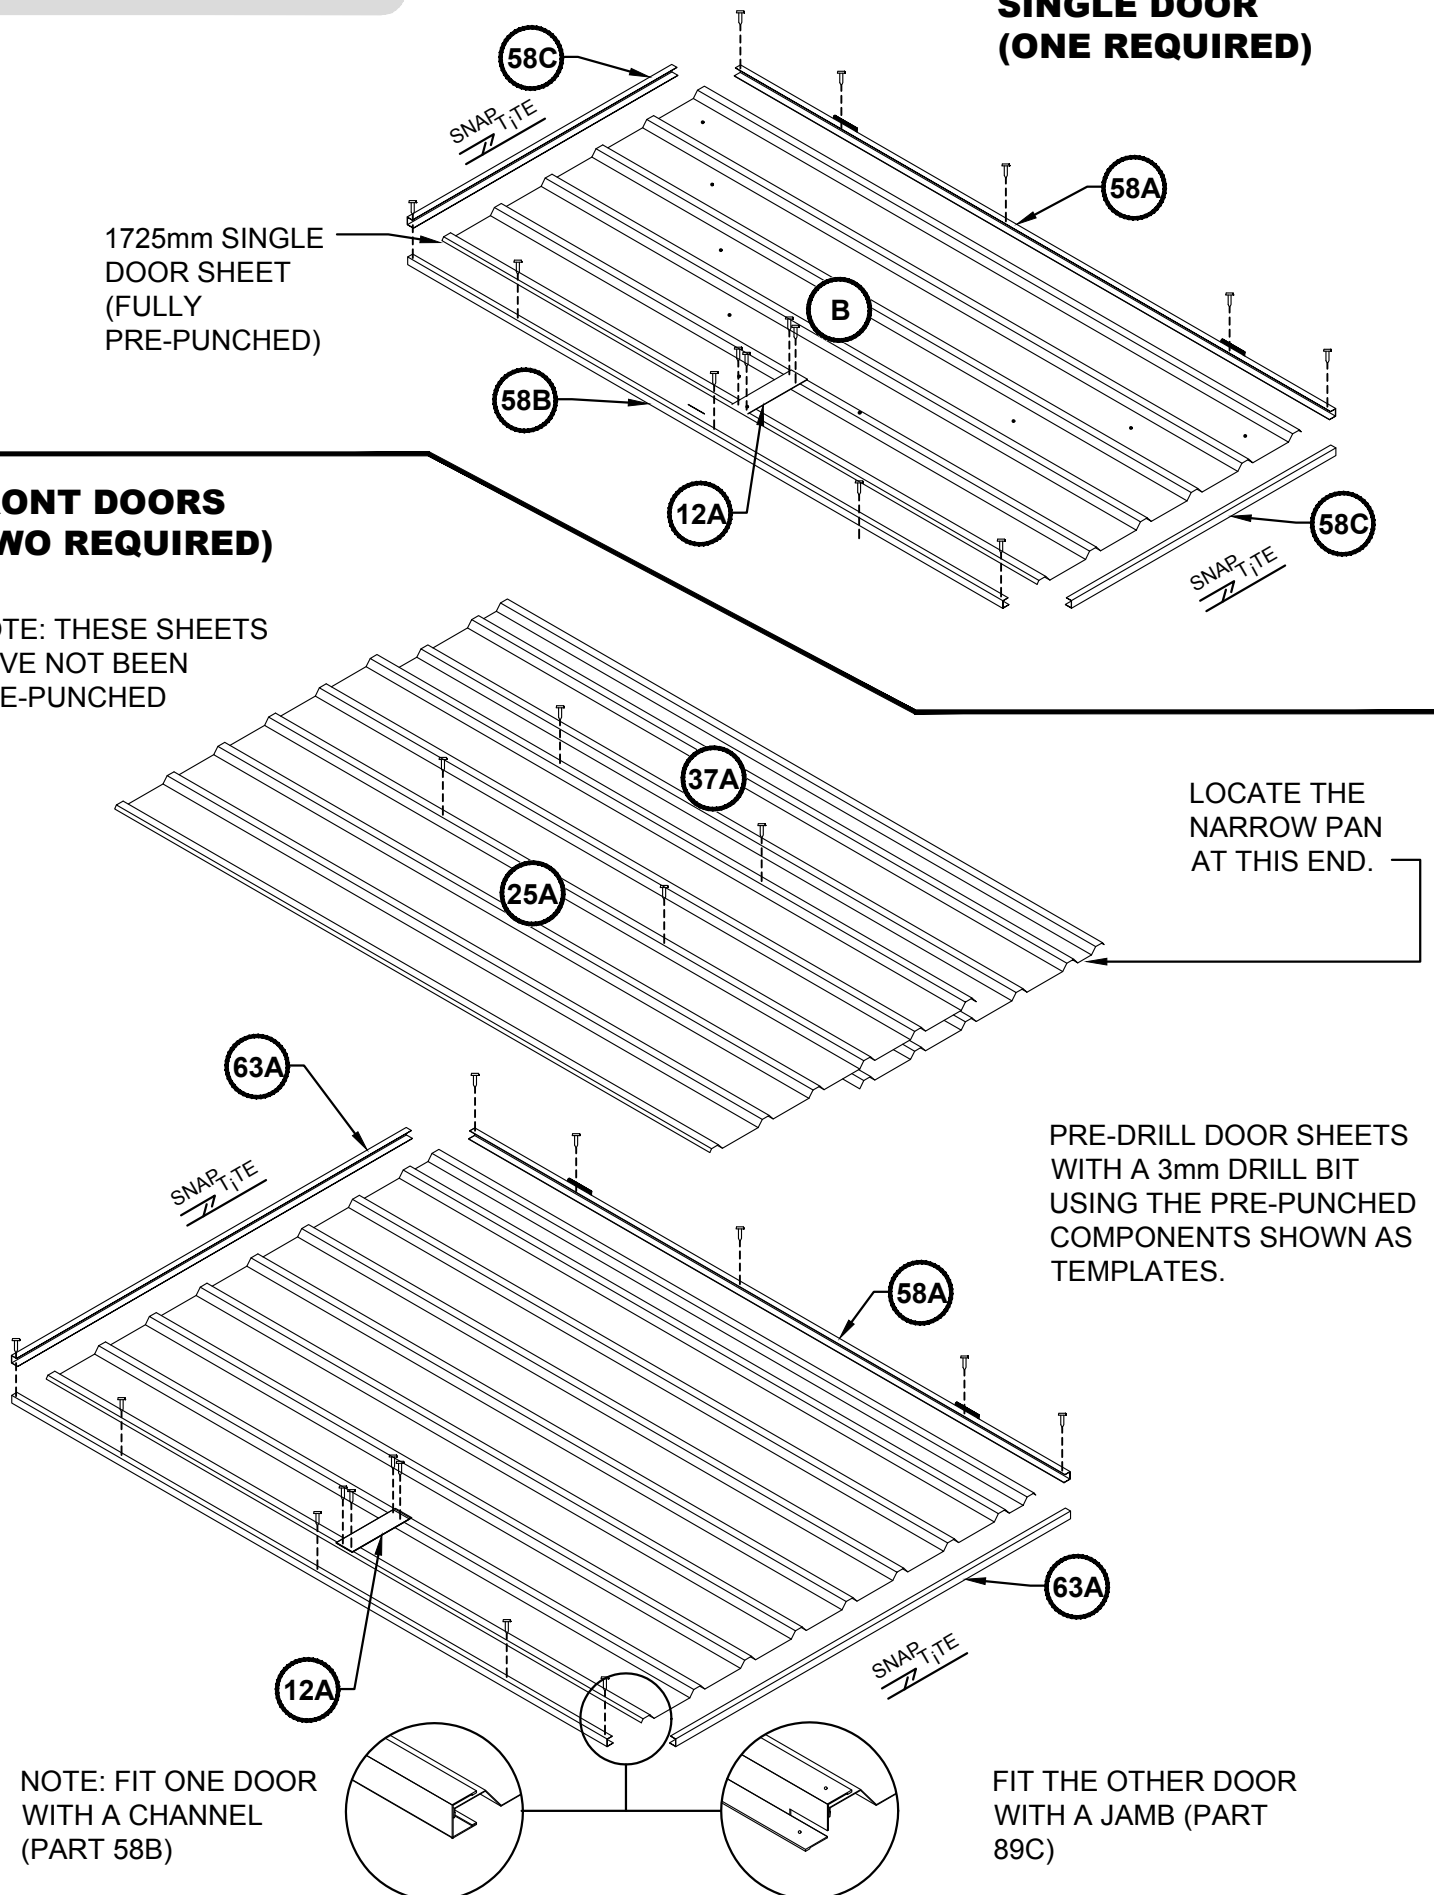




## DOOR PANEL ASSEMBLY

### SINGLE DOOR

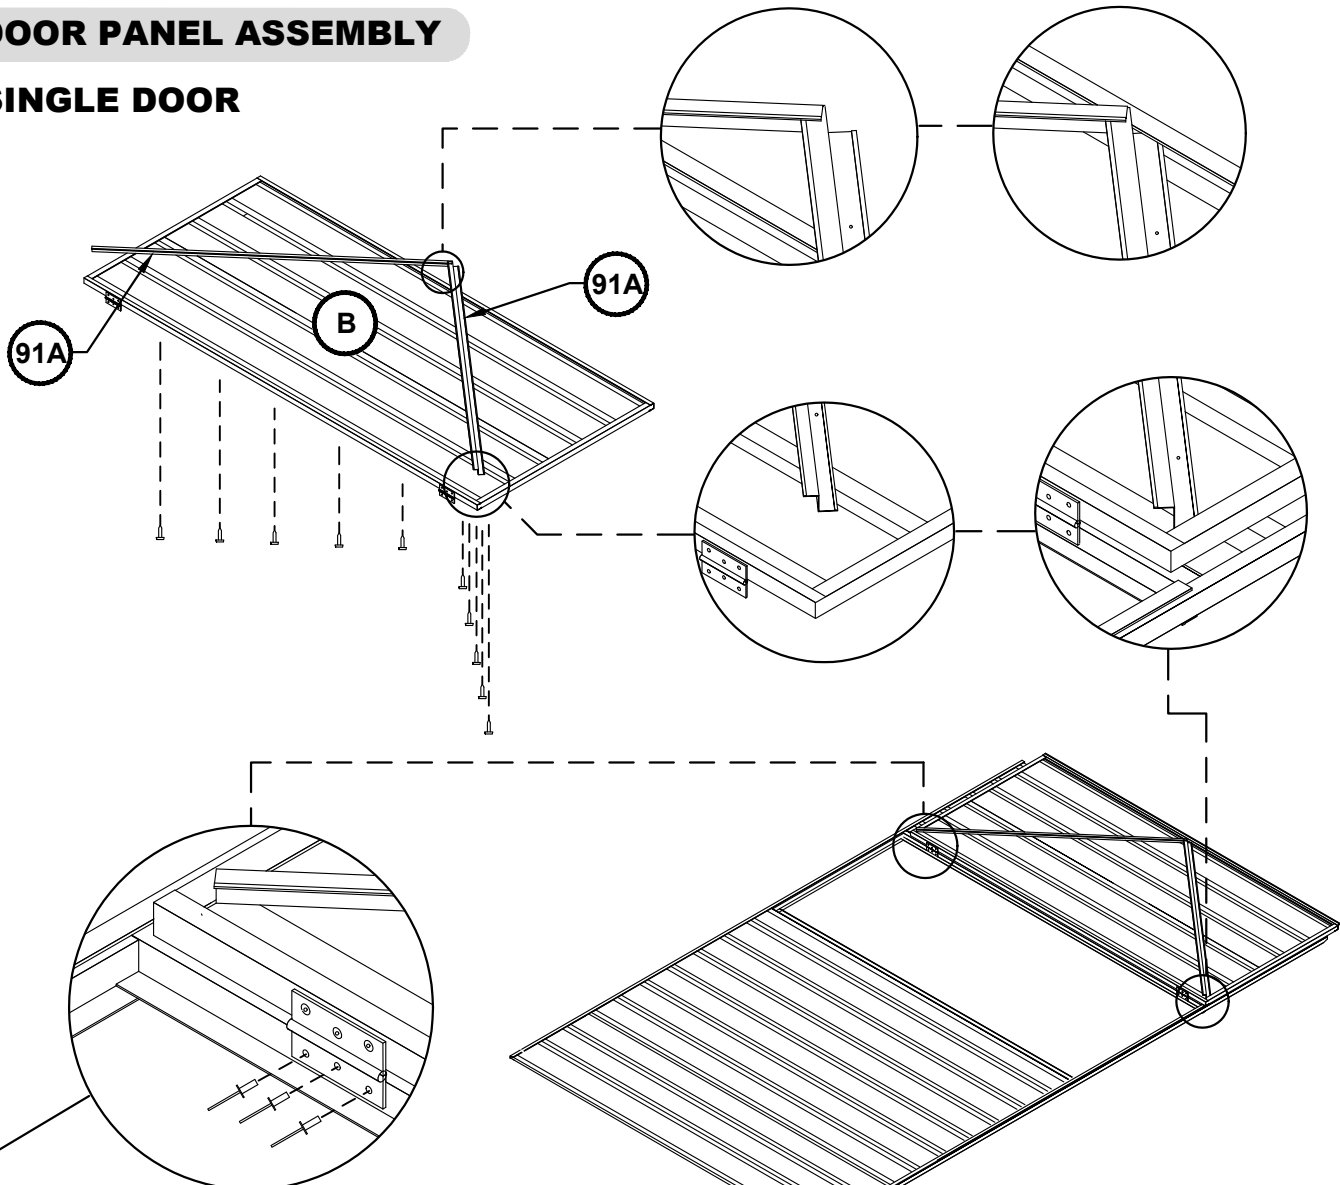


NOTE: Nuts and bolts (supplied) may be used instead of pop rivets (supplied) by simply enlarging the hinge hole sets in the jamb using a 4mm drill bit

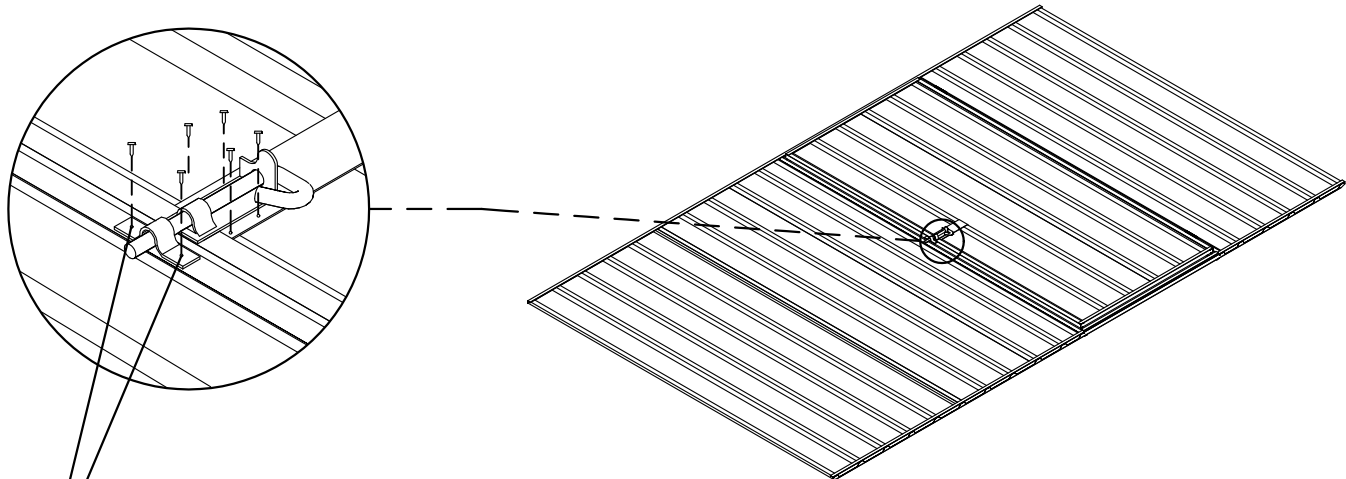

NOTE: The two holes required to connect the padbolt hasp for each door have not been pre-punched, to allow for proper alignment. position each hasp centrally over the padbolt shaft, and drill 3mm holes and secure with screws


## CENTRE PORTAL FRAME DETAILS

**REFER TO PAGE 5 FOR PORTAL FRAME  
PARTS AND ACCESSORIES**

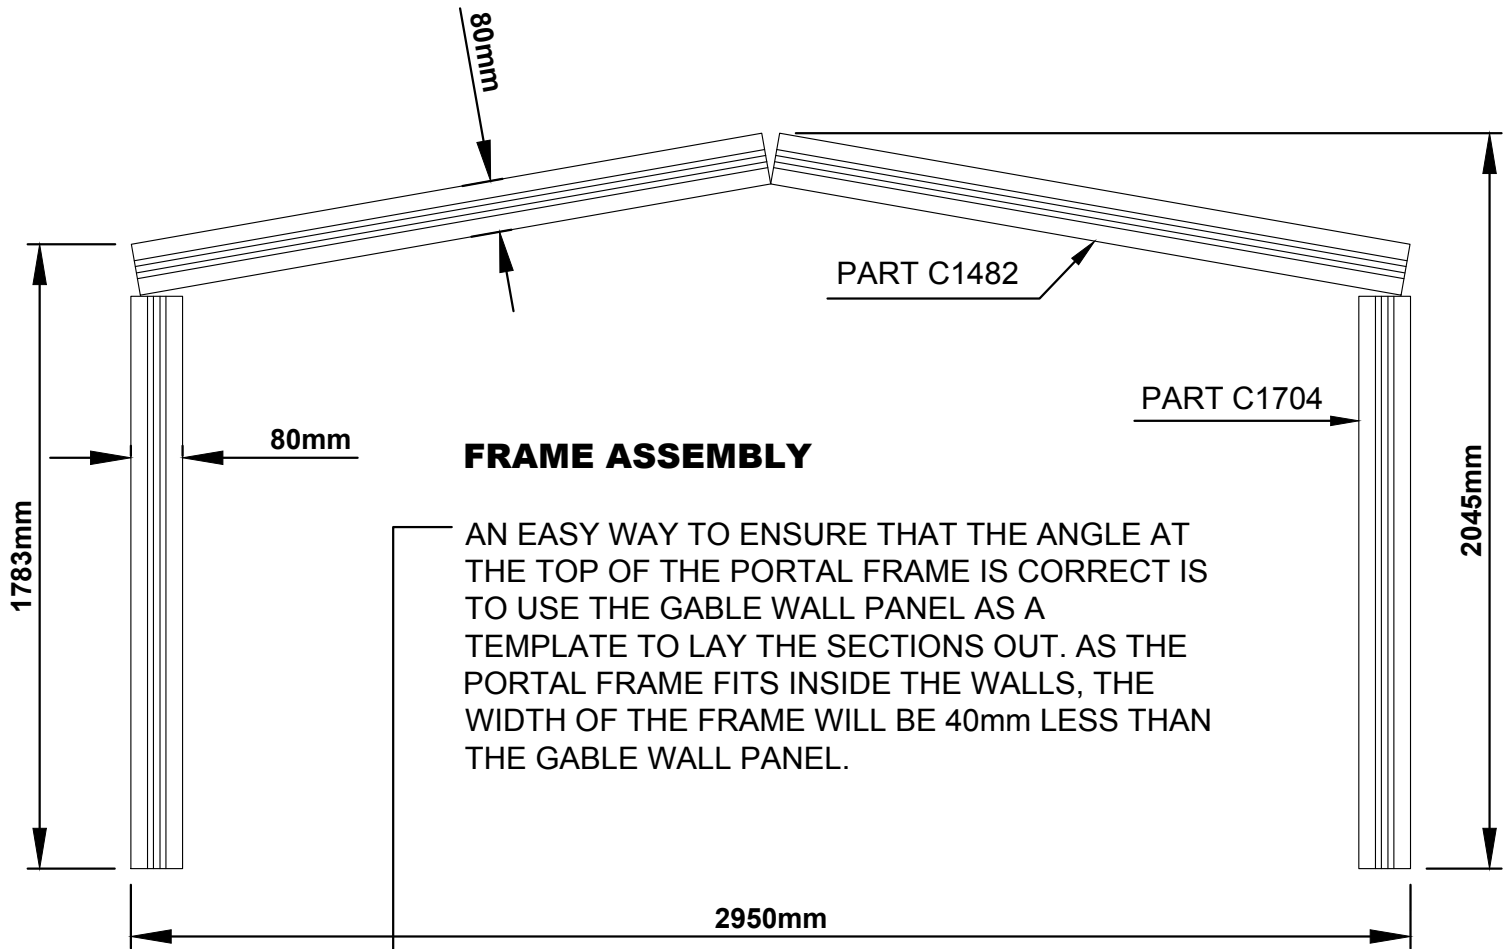

### NOTE:

PLEASE REFER TO THE PHOTOS ON PAGES 29 - 39 FOR CLARITY

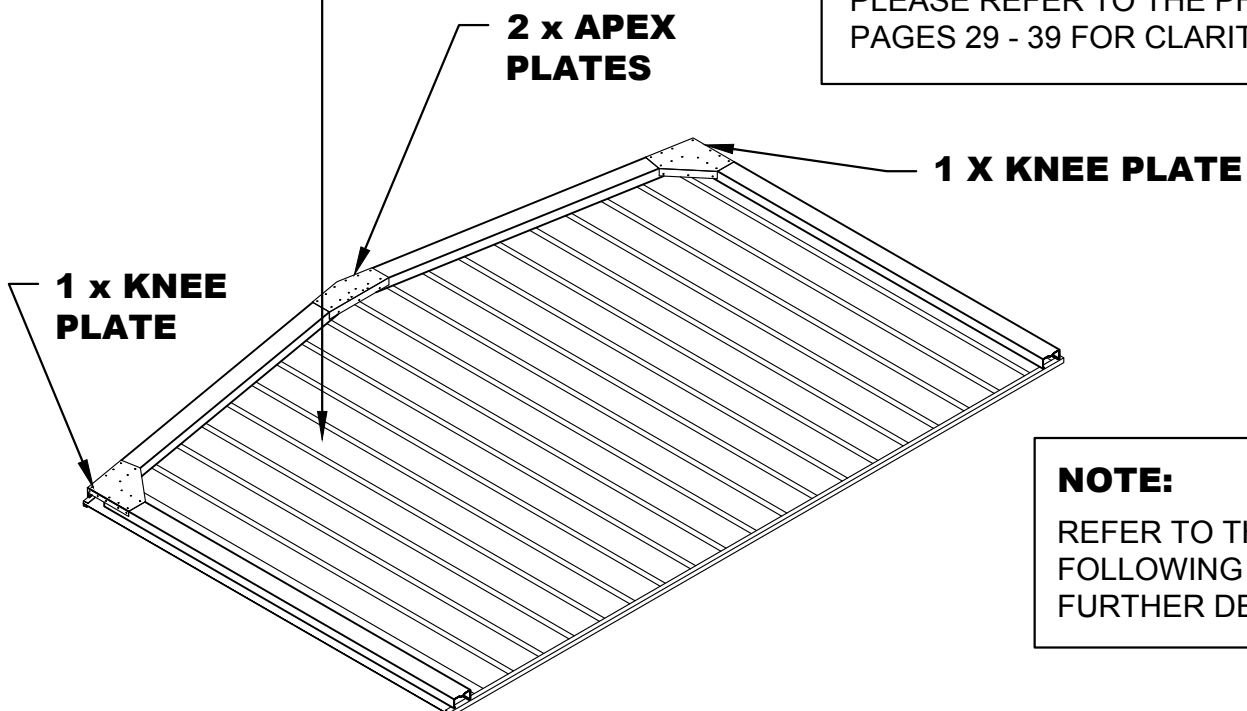


### NOTE:

REFER TO THE FOLLOWING PAGE FOR FURTHER DETAILS.



NOTE: IF YOU HAVE AN EDGE REBATE IN YOUR CONCRETE SLAB, YOU WILL HAVE TO CUT AN AMOUNT OFF THE BOTTOM OF THE FRAME LEGS EQUAL TO THE DEPTH OF THE REBATE.

## CENTRE PORTAL FRAME ASSEMBLY

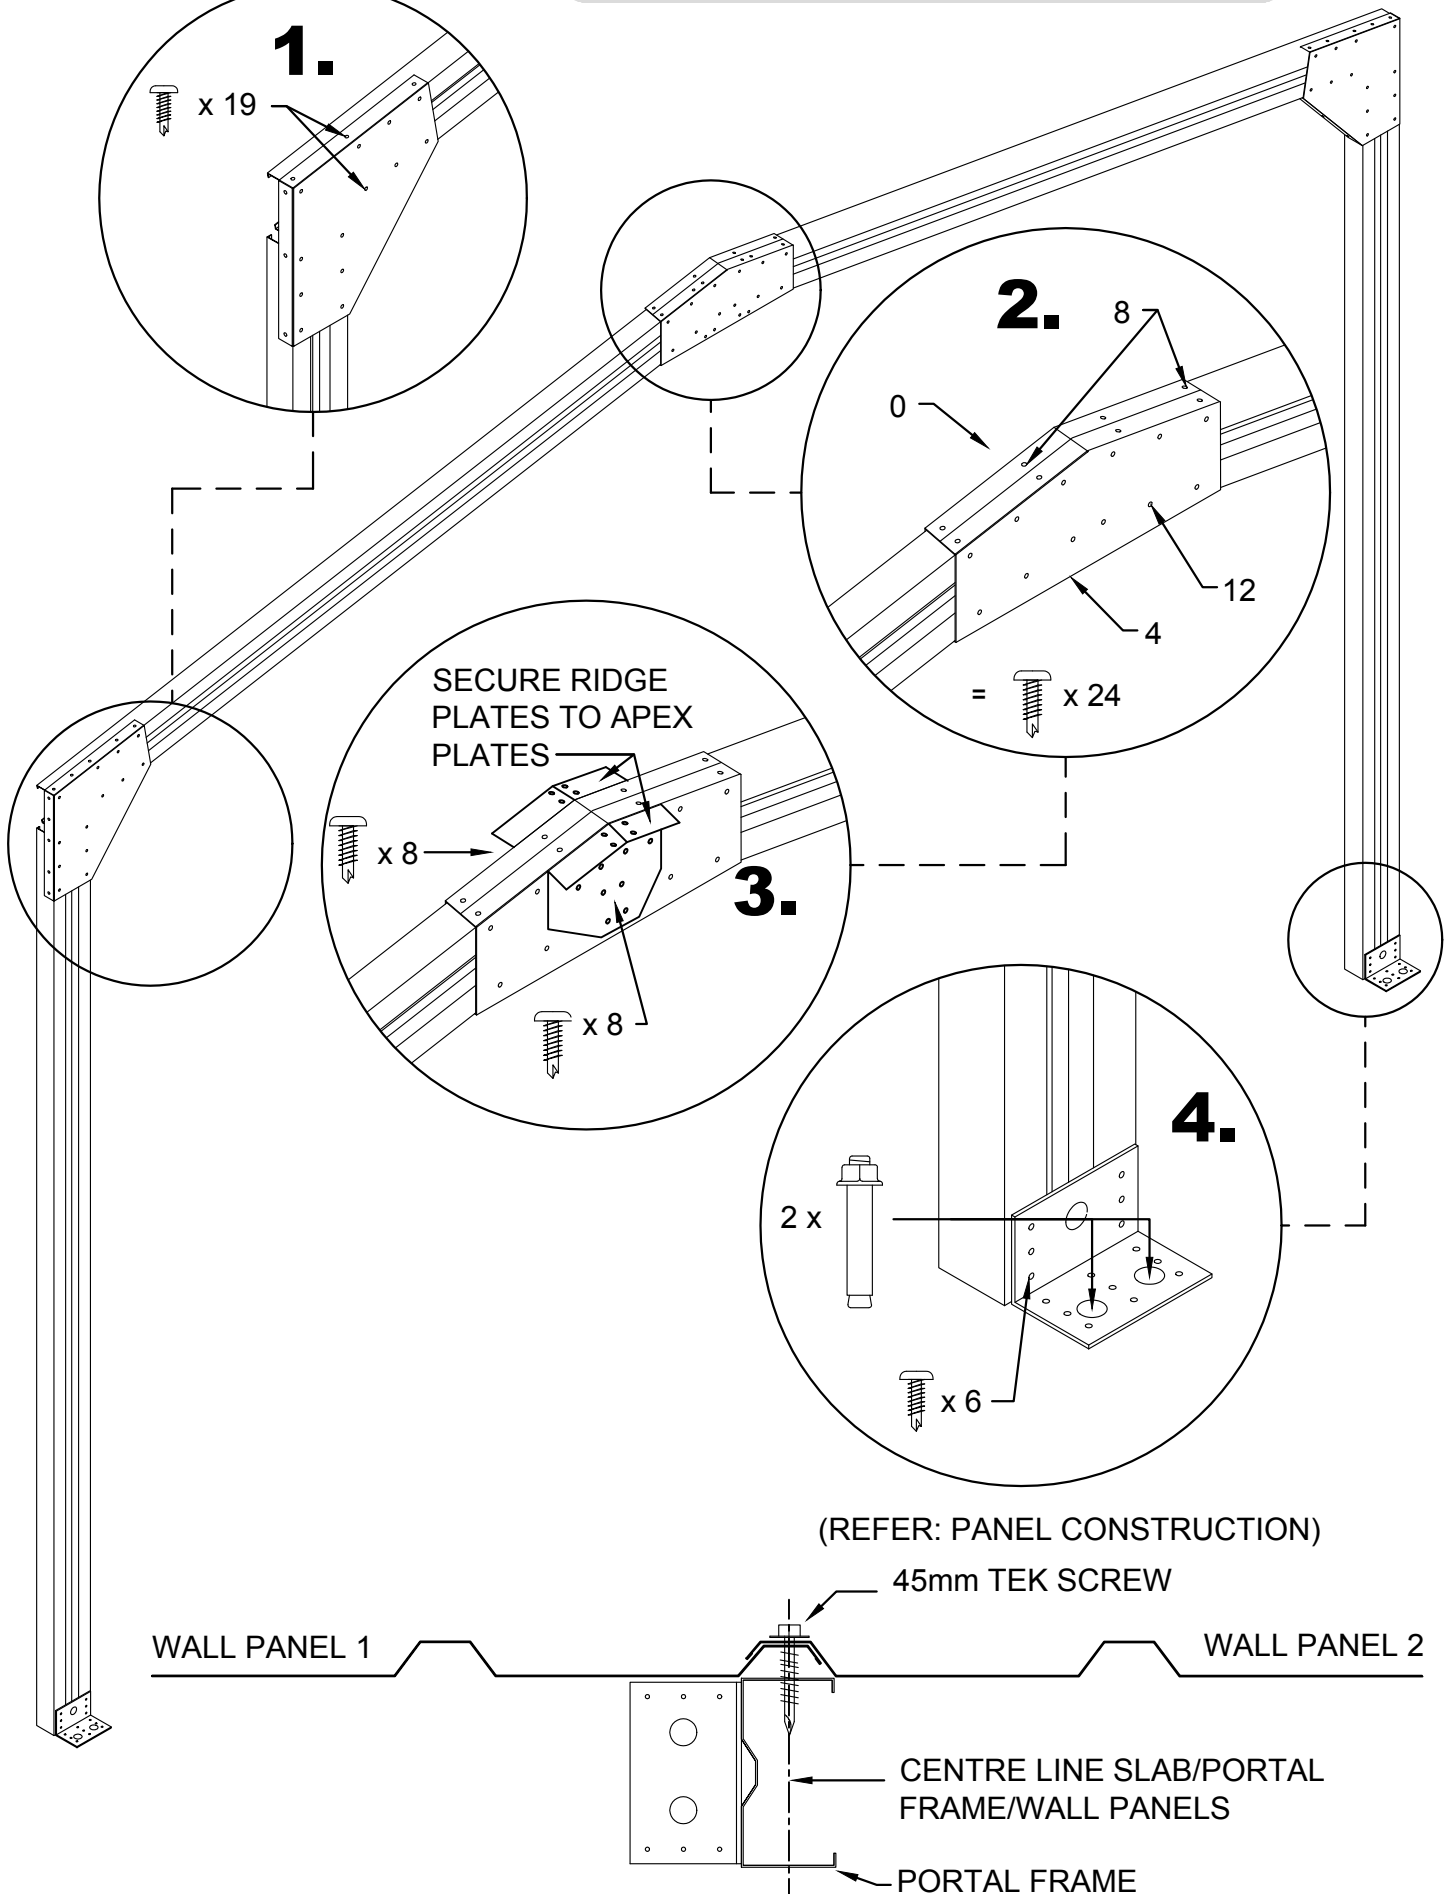


## UTILITY FRONT FRAME ASSEMBLY



(SHEET 1 of 2)

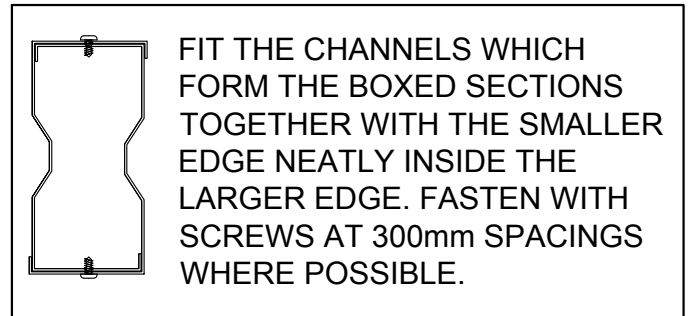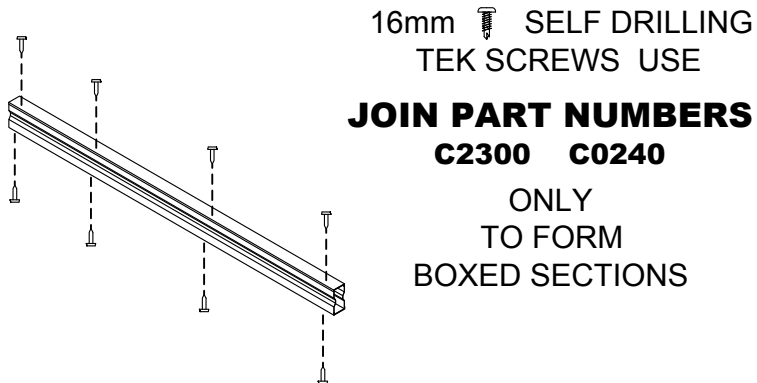

**REFER TO PAGE 5 FOR PORTAL FRAME PARTS AND ACCESSORIES**

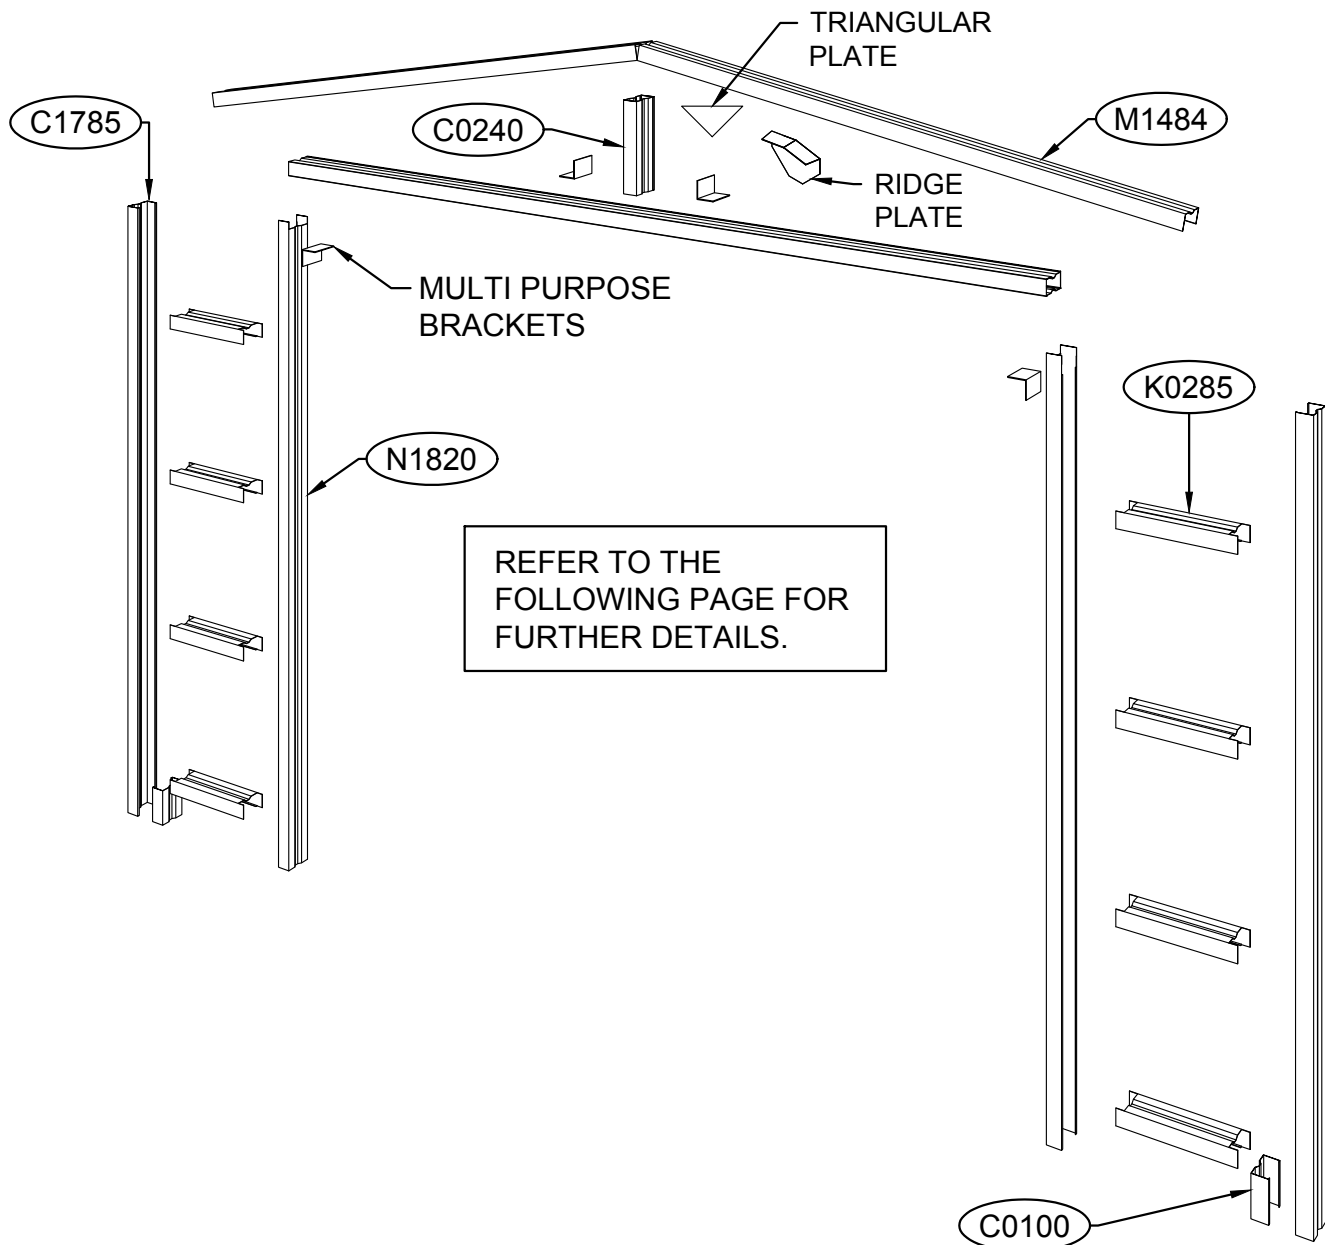


## UTILITY FRONT FRAME ASSEMBLY (SHEET 2 of 2)

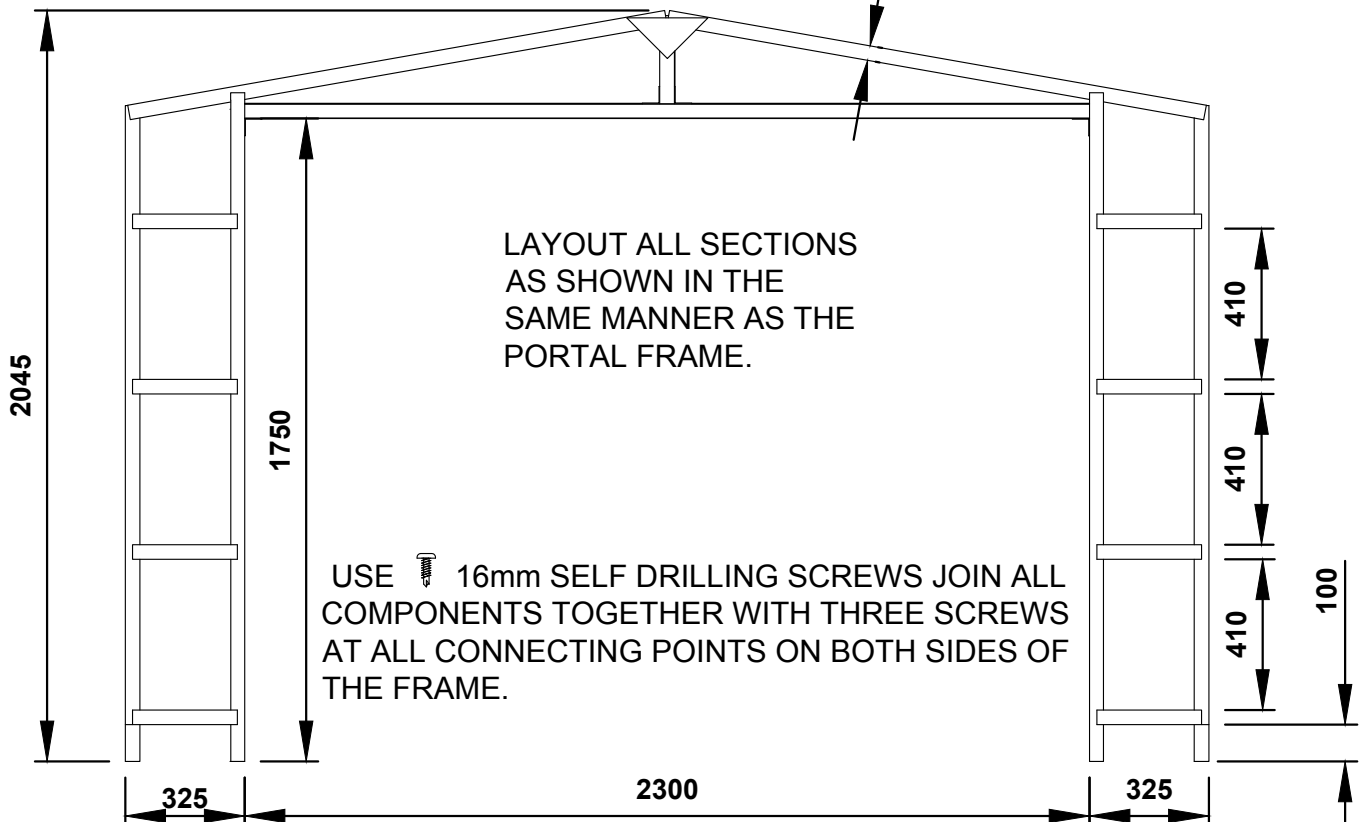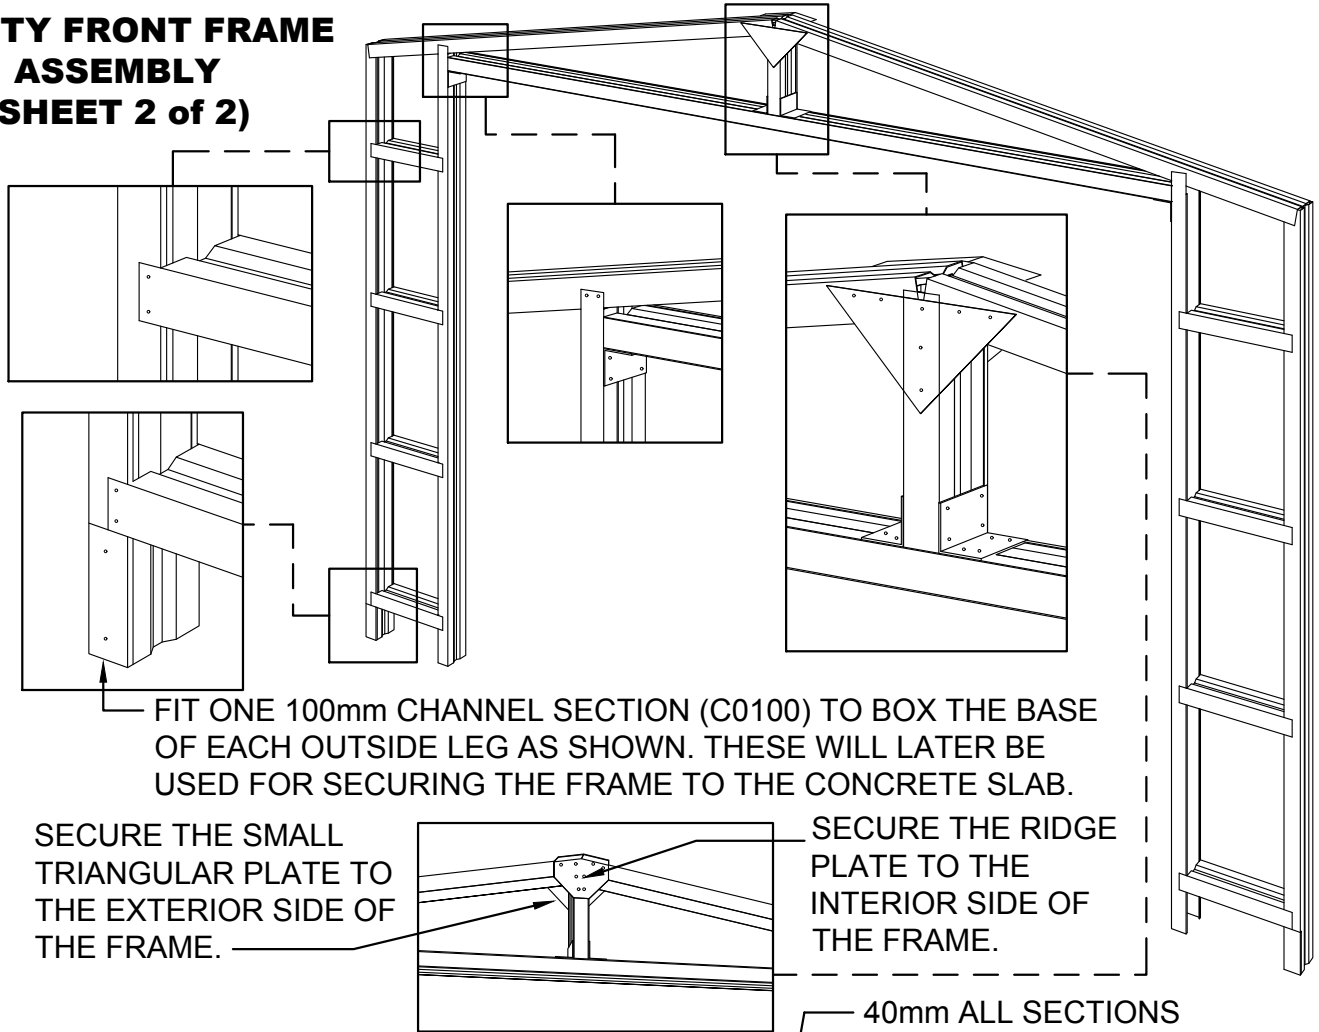

NOTE: IF YOU HAVE AN EDGE REBATE IN YOUR CONCRETE SLAB, YOU WILL HAVE TO CUT AN AMOUNT OFF THE BOTTOM OF THE FRAME LEGS EQUAL TO THE DEPTH OF THE REBATE.

## FRONT PANEL ASSEMBLY

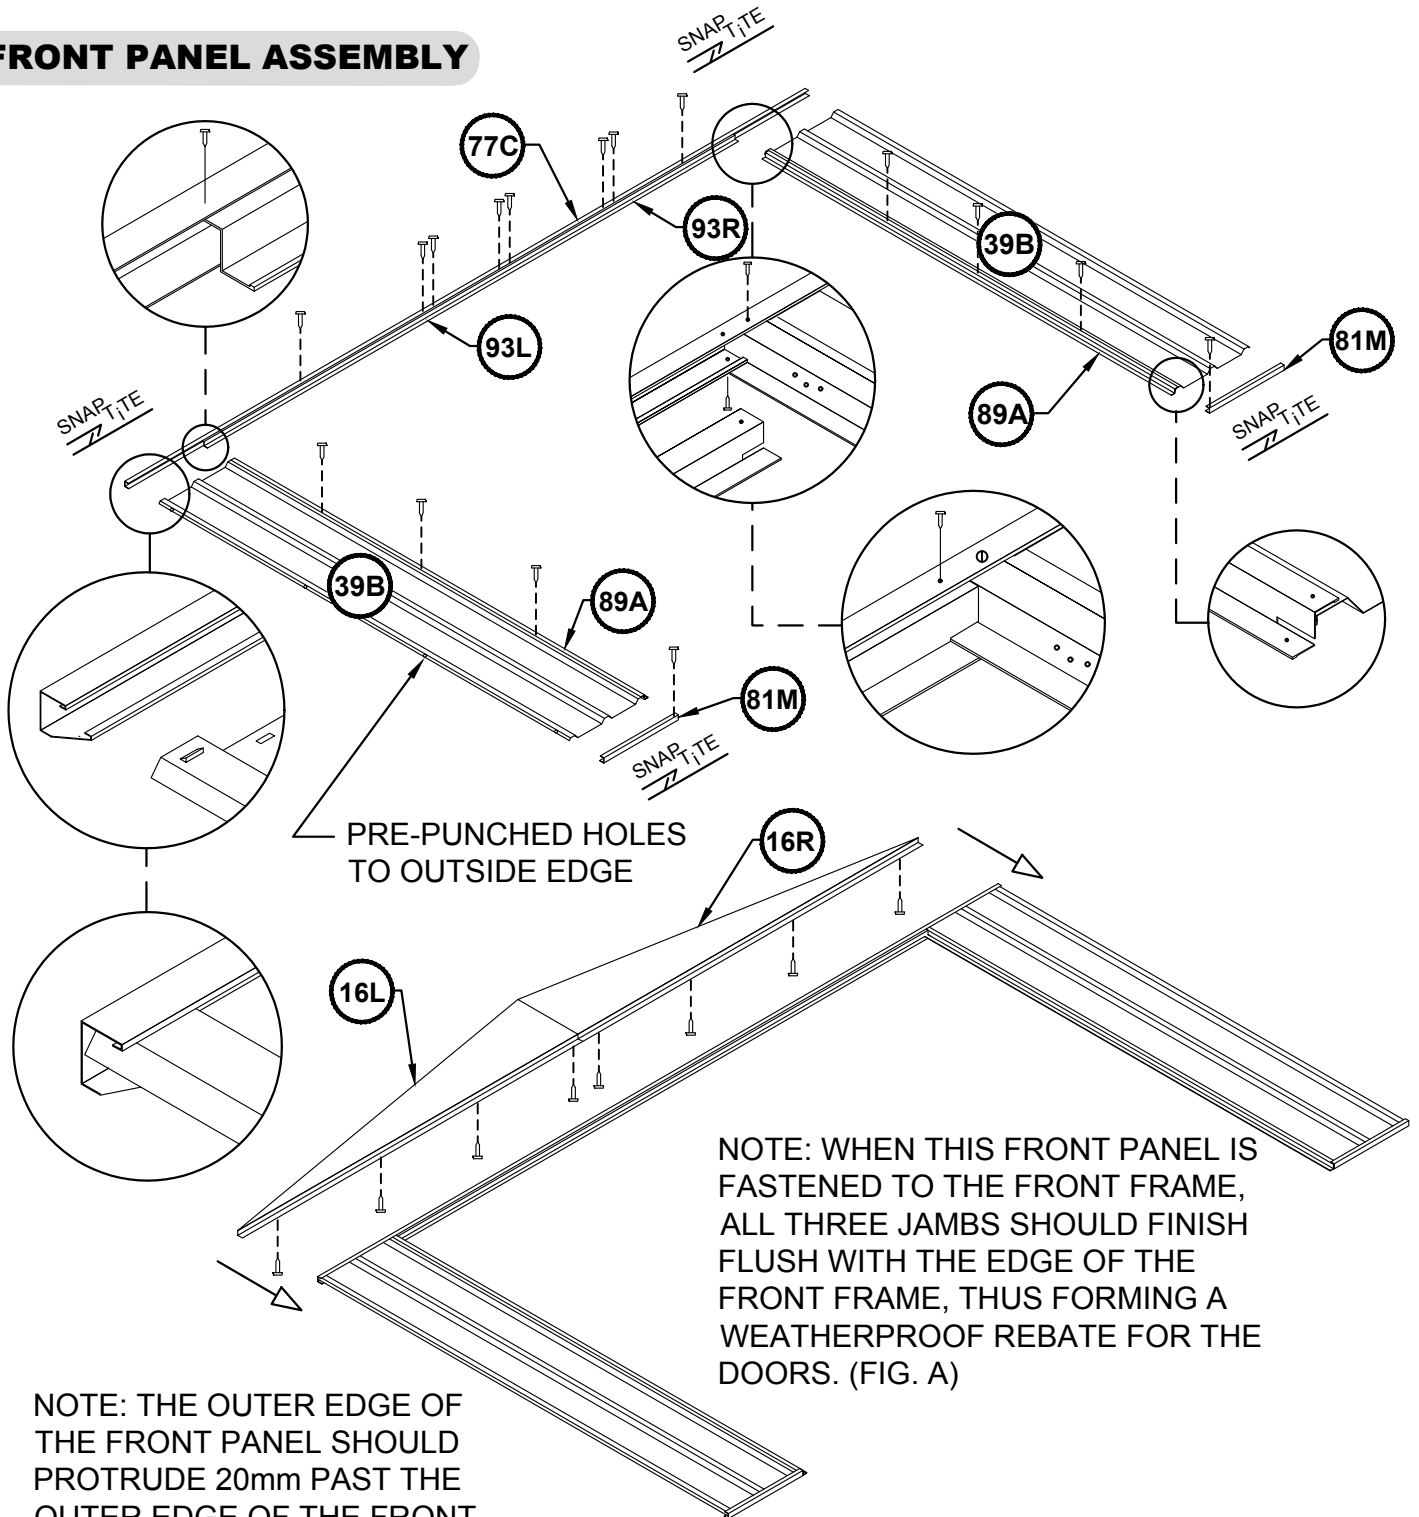


NOTE: THE OUTER EDGE OF THE FRONT PANEL SHOULD PROTRUDE 20mm PAST THE OUTER EDGE OF THE FRONT FRAME FOR CORNER LAPPING OF SIDE WALL PANELS. (FIG. B)

NOTE: WHEN THIS FRONT PANEL IS FASTENED TO THE FRONT FRAME, ALL THREE JAMBS SHOULD FINISH FLUSH WITH THE EDGE OF THE FRONT FRAME, THUS FORMING A WEATHERPROOF REBATE FOR THE DOORS. (FIG. A)



**FIG. B**

**FIG. A FIG. A**

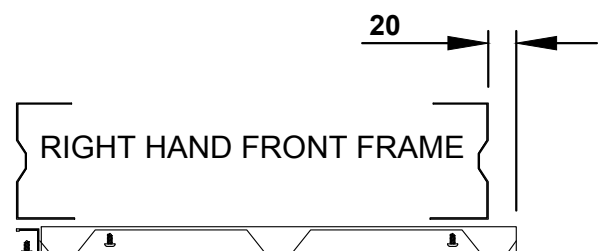

**FIG. B**





## FRONT AND CENTRE FRAME TO SLAB DETAILS

**FIG 8A**

RECOMMENDED SLAB DIMENSIONS - 6060mm x 3100mm

EXTERNAL WALL DIMENSIONS - 5960mm x 3000mm


INTERNAL WALL DIMENSIONS - 5920mm x 2960mm

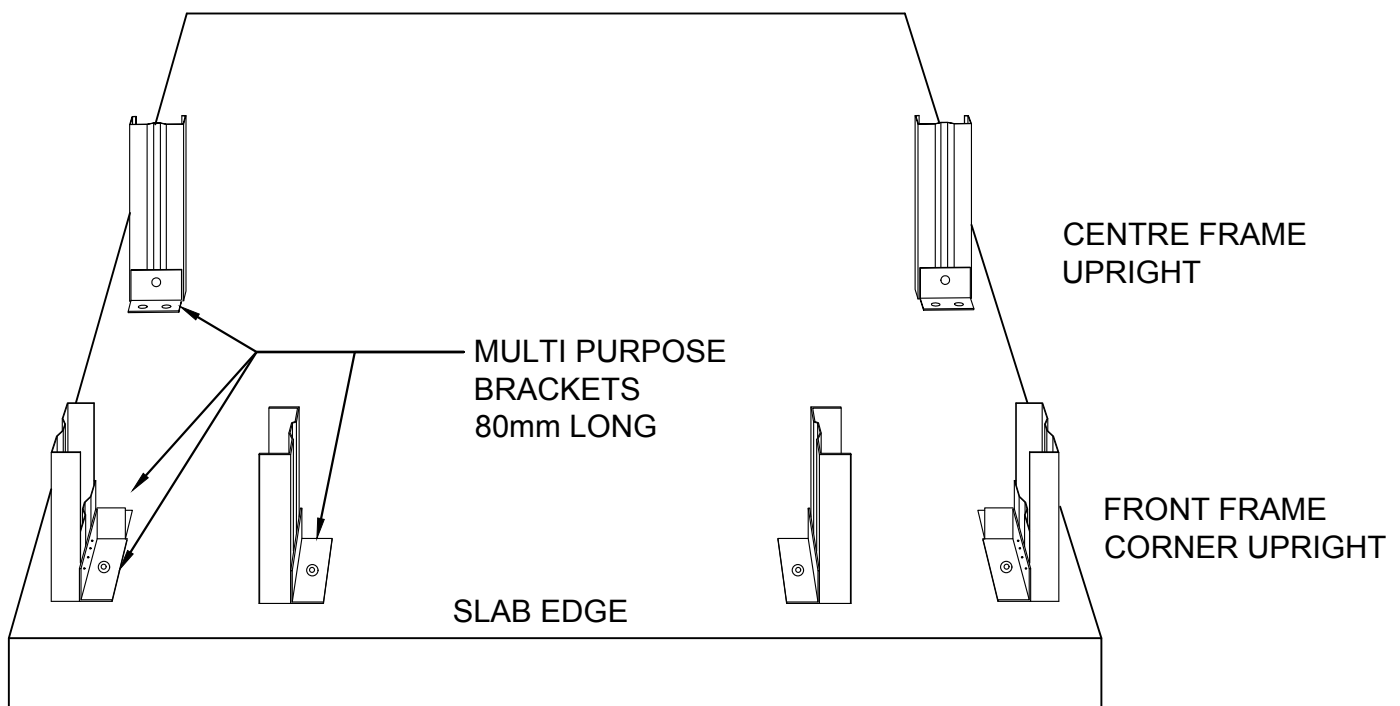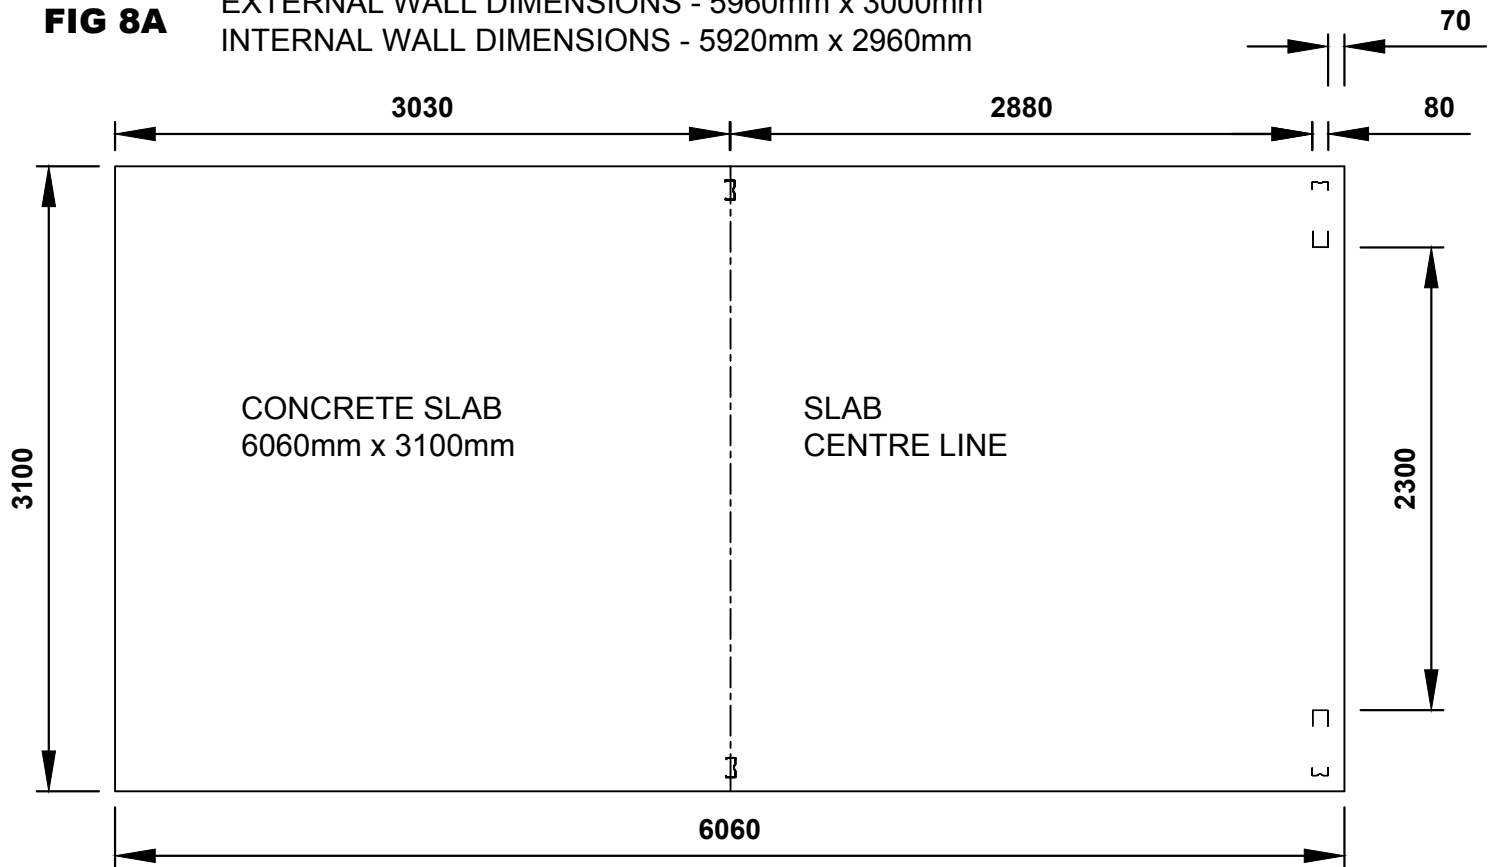

- SECURE MULTI PURPOSE BRACKETS TO UPRIGHTS USING SELF DRILLING SCREWS
- MOVE FRAMES INTO POSITION, MARK AND DRILL HOLES IN SLAB USING 10mm MASONRY DRILL BIT
- SECURE FRAMES TO SLAB WITH DYNABOLTS



## PANEL CONSTRUCTION

NOTE: TAKE CARE TO ENSURE THAT BOTH FRONT AND REAR WALL PANELS ARE NOT POSITIONED UPSIDE DOWN. THE TOP CHANNEL OF EACH PANEL IS PRE-PUNCHED FOR ATTACHING ROOF SHEETS, THE BOTTOM CHANNELS ARE NOT.


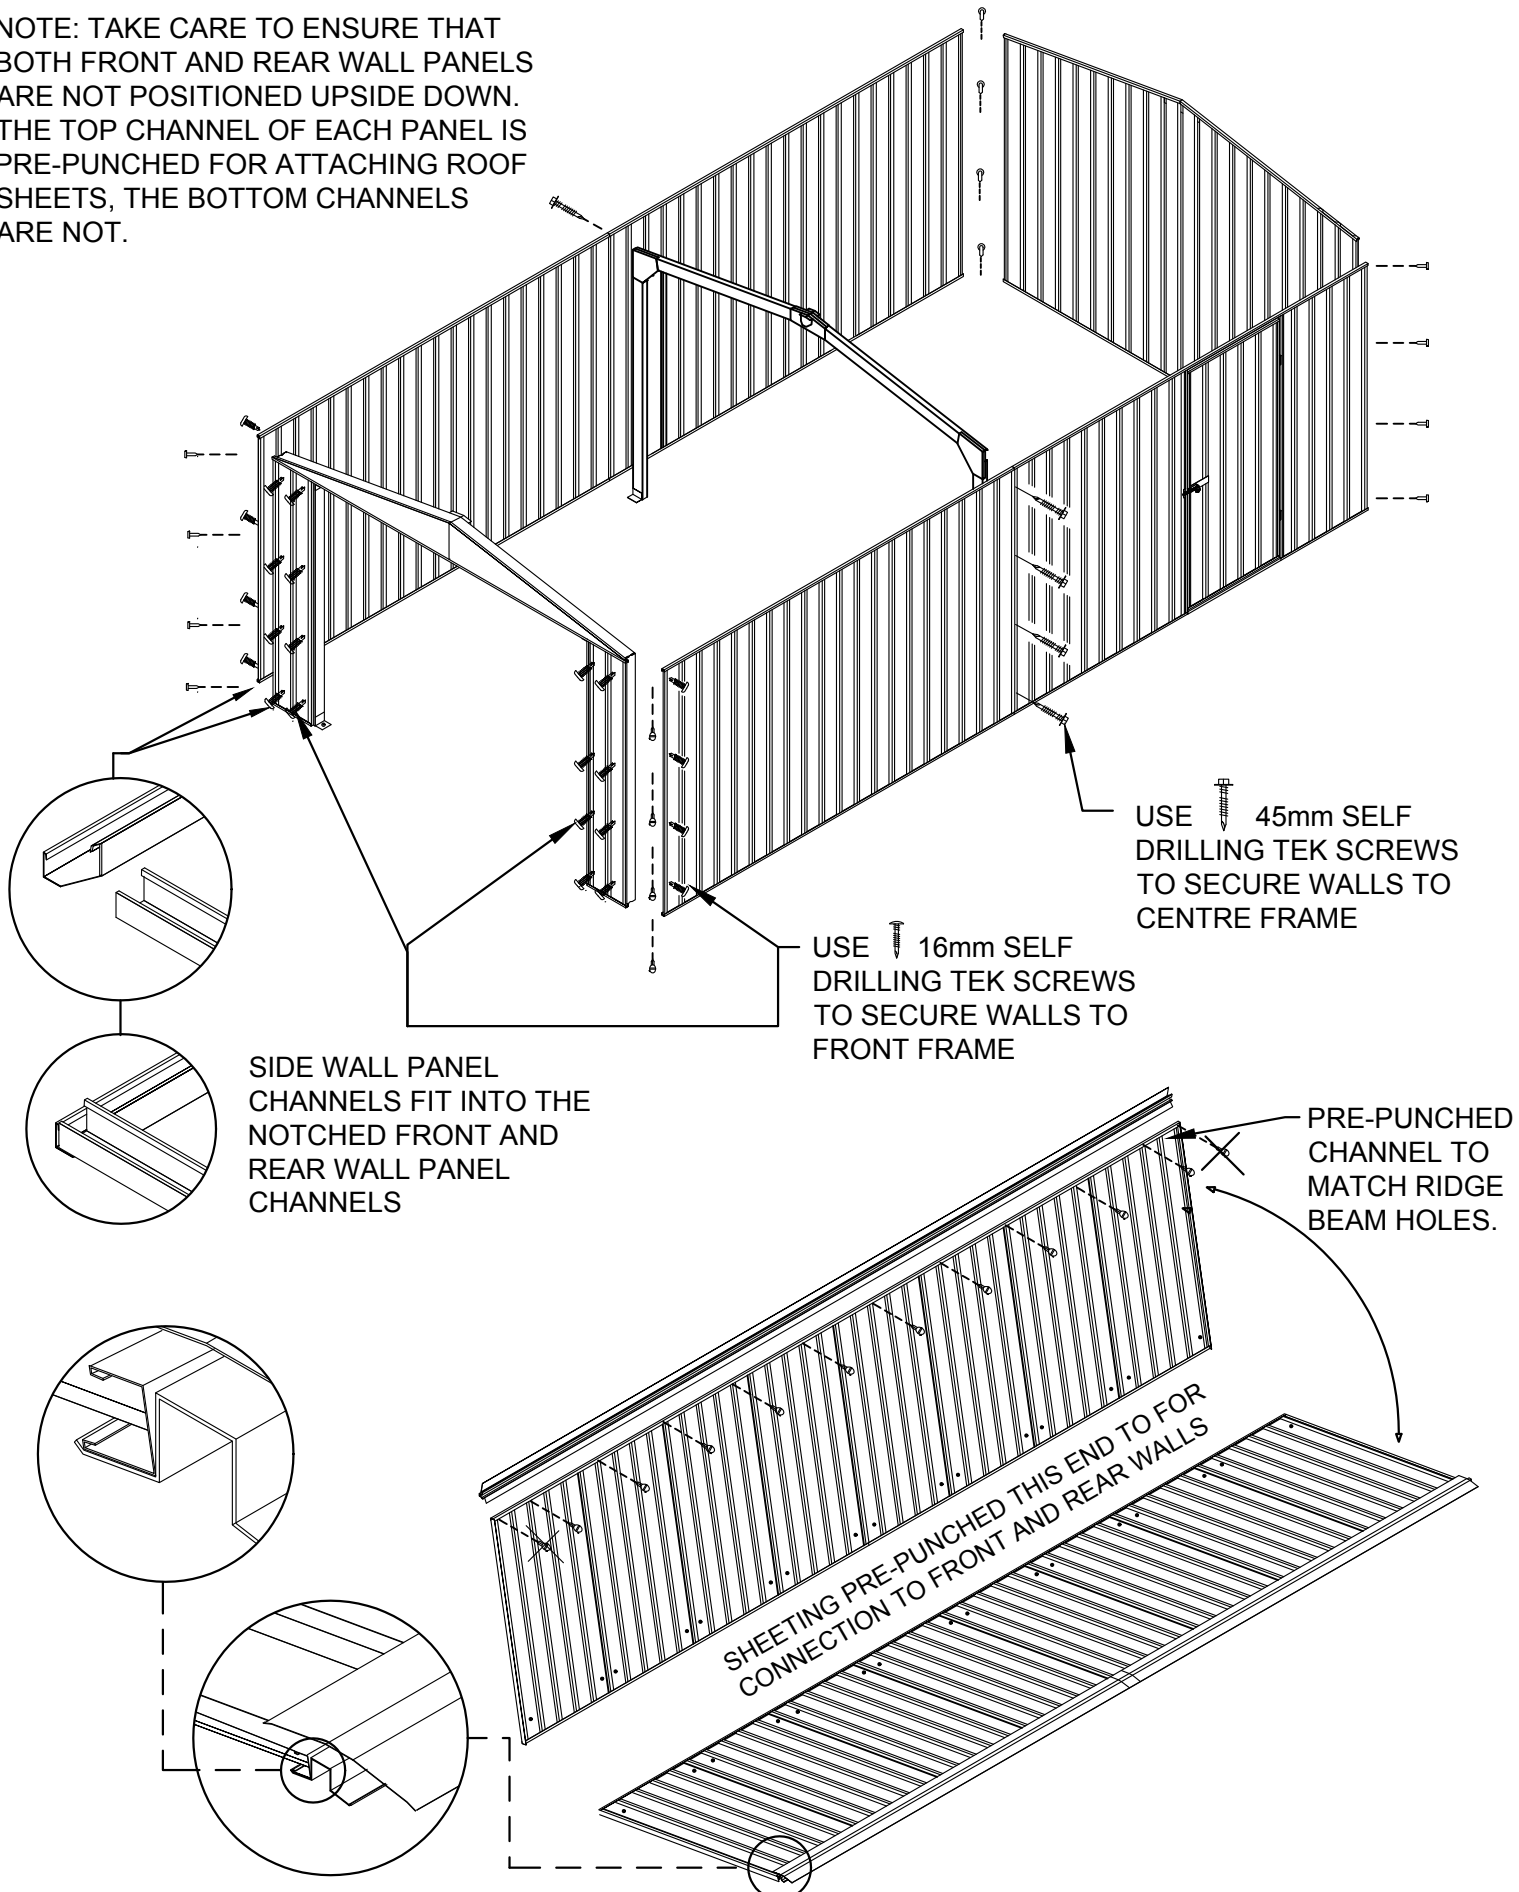


## ROOF CONSTRUCTION

SECURE EACH RIDGE BEAM TO EACH RIDGE PLATE WITH 4 X 16mm SELF DRILLING TEK SCREWS.

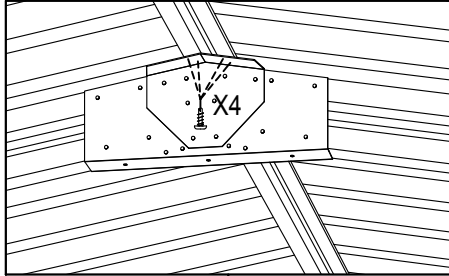

INSIDE VIEW OF FIXING

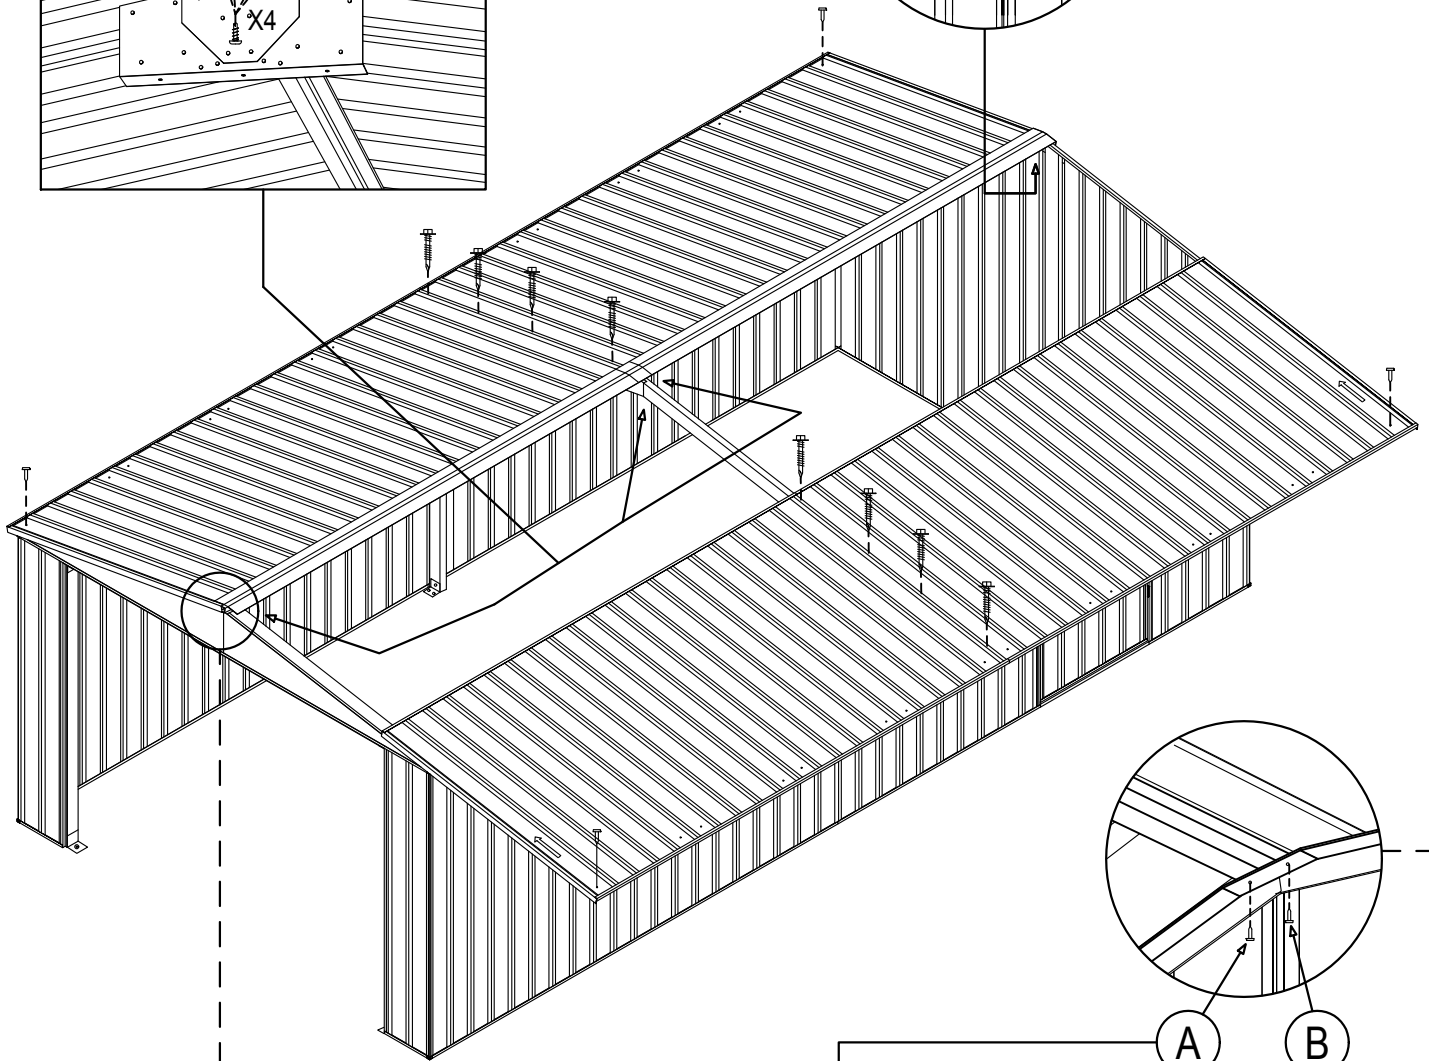

A

B

SECURE PEAK BRACE TO RIDGE BEAM AND ROOF PANEL WITH ONE SCREW AT EACH END


MOVE THE OTHER ROOF PANEL INTO POSITION AND SECURE PEAK BRACE TO RIDGE BEAM AND ROOF PANEL WITH ONE SCREW AT EACH END

SECURE BOTH ROOF PANELS TO THE WALLS WITH ONE SCREW IN EACH CORNER FIRST, FOLLOWED BY TWO SCREWS ADJACENT TO THE PORTAL FRAME AS SHOWN ABOVE


SECURE ROOF PANELS TO THE TOP CHORDS OF THE PORTAL FRAME USING 45mm SELF DRILLING TEK SCREWS.

## FINAL CONSTRUCTION


BEND THE TOP AND BOTTOM FLANGES AS SHOWN, THEN HOOK THE BOTTOM FLANGES UNDER THE TOP CHANNEL AND SCREW THE TOP FLANGES FOR BOTH AS SHOWN GABLE CAPS

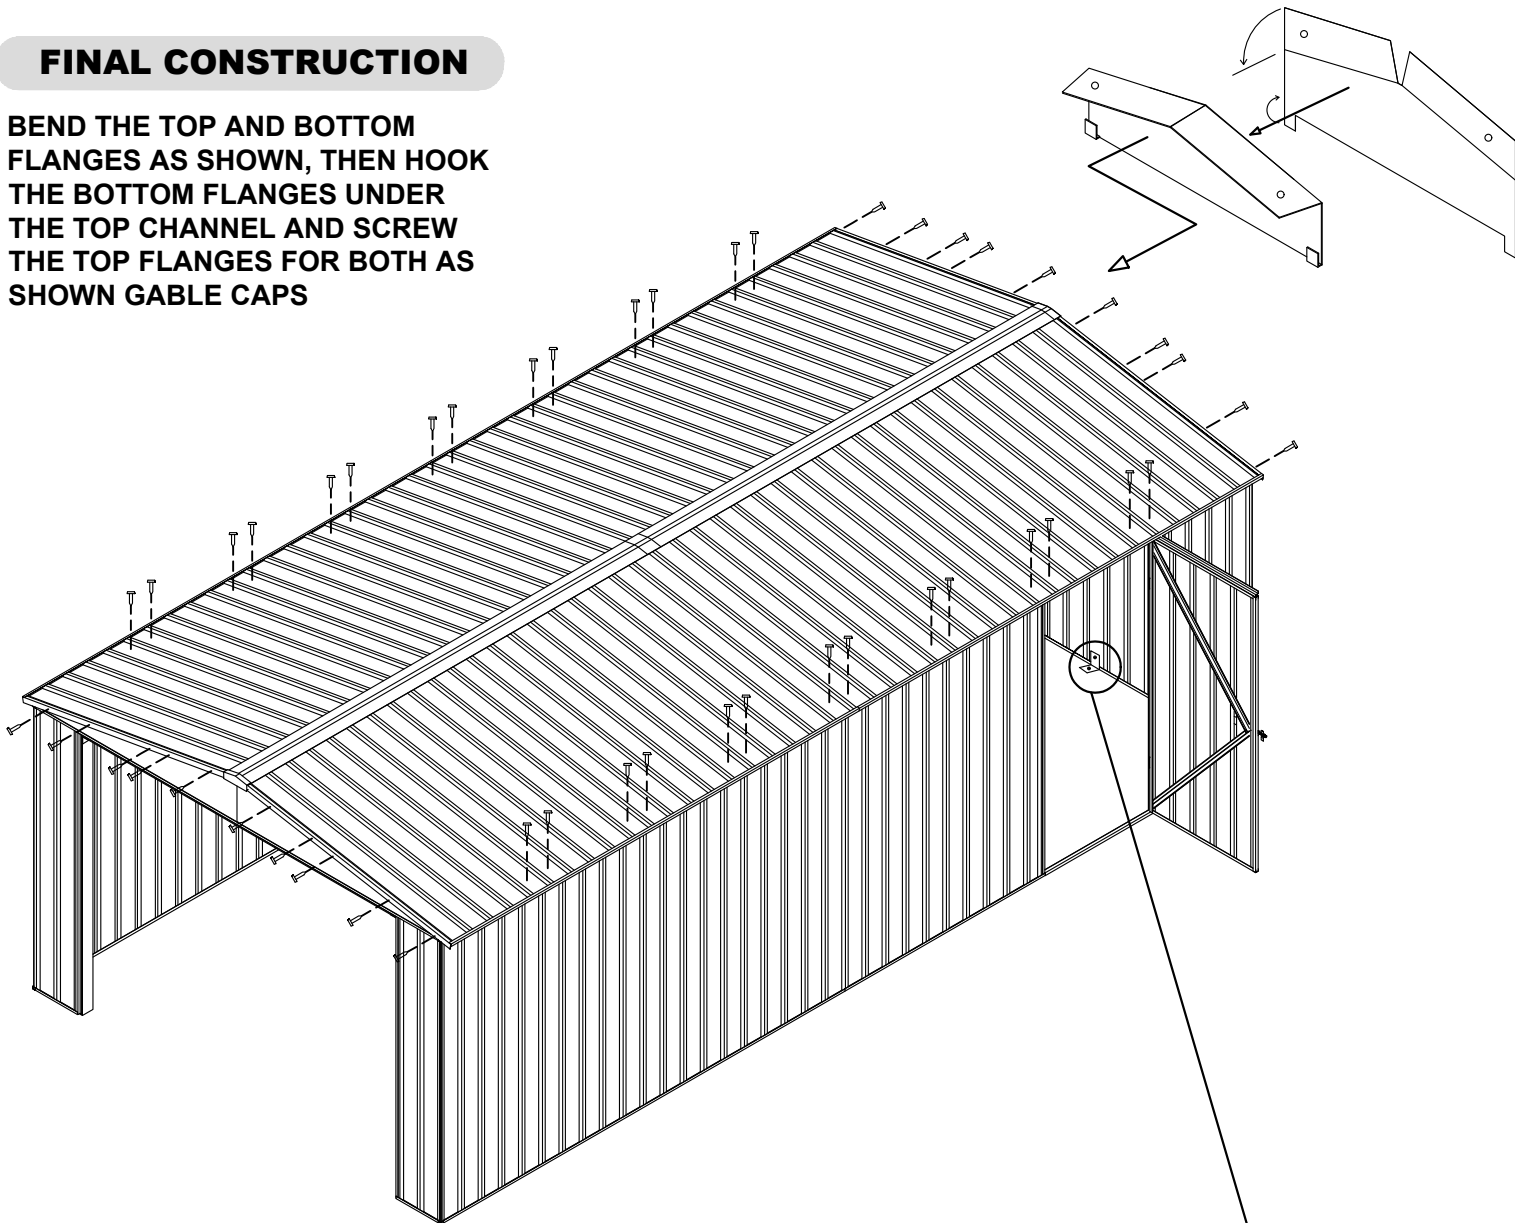

## ANCHORING OF SHED

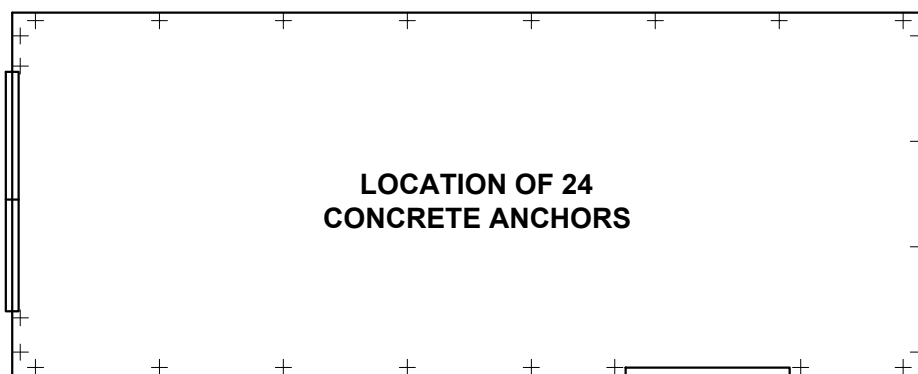


- EACH ANCHOR CONSISTS OF ONE NUT, BOLT, DYNABOLT AND STEEL ANGLE
- DRILL A 10mm HOLE INTO THE WALL SHEET
- DRILL A 10mm HOLE INTO THE CONCRETE

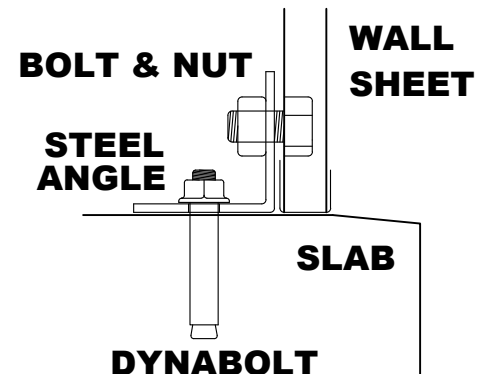

## DOOR INSTALLATION

- SECURE FRONT DOORS TO THE FRONT PANEL IN SAME MANNER AS THE SIDE DOOR WAS FITTED

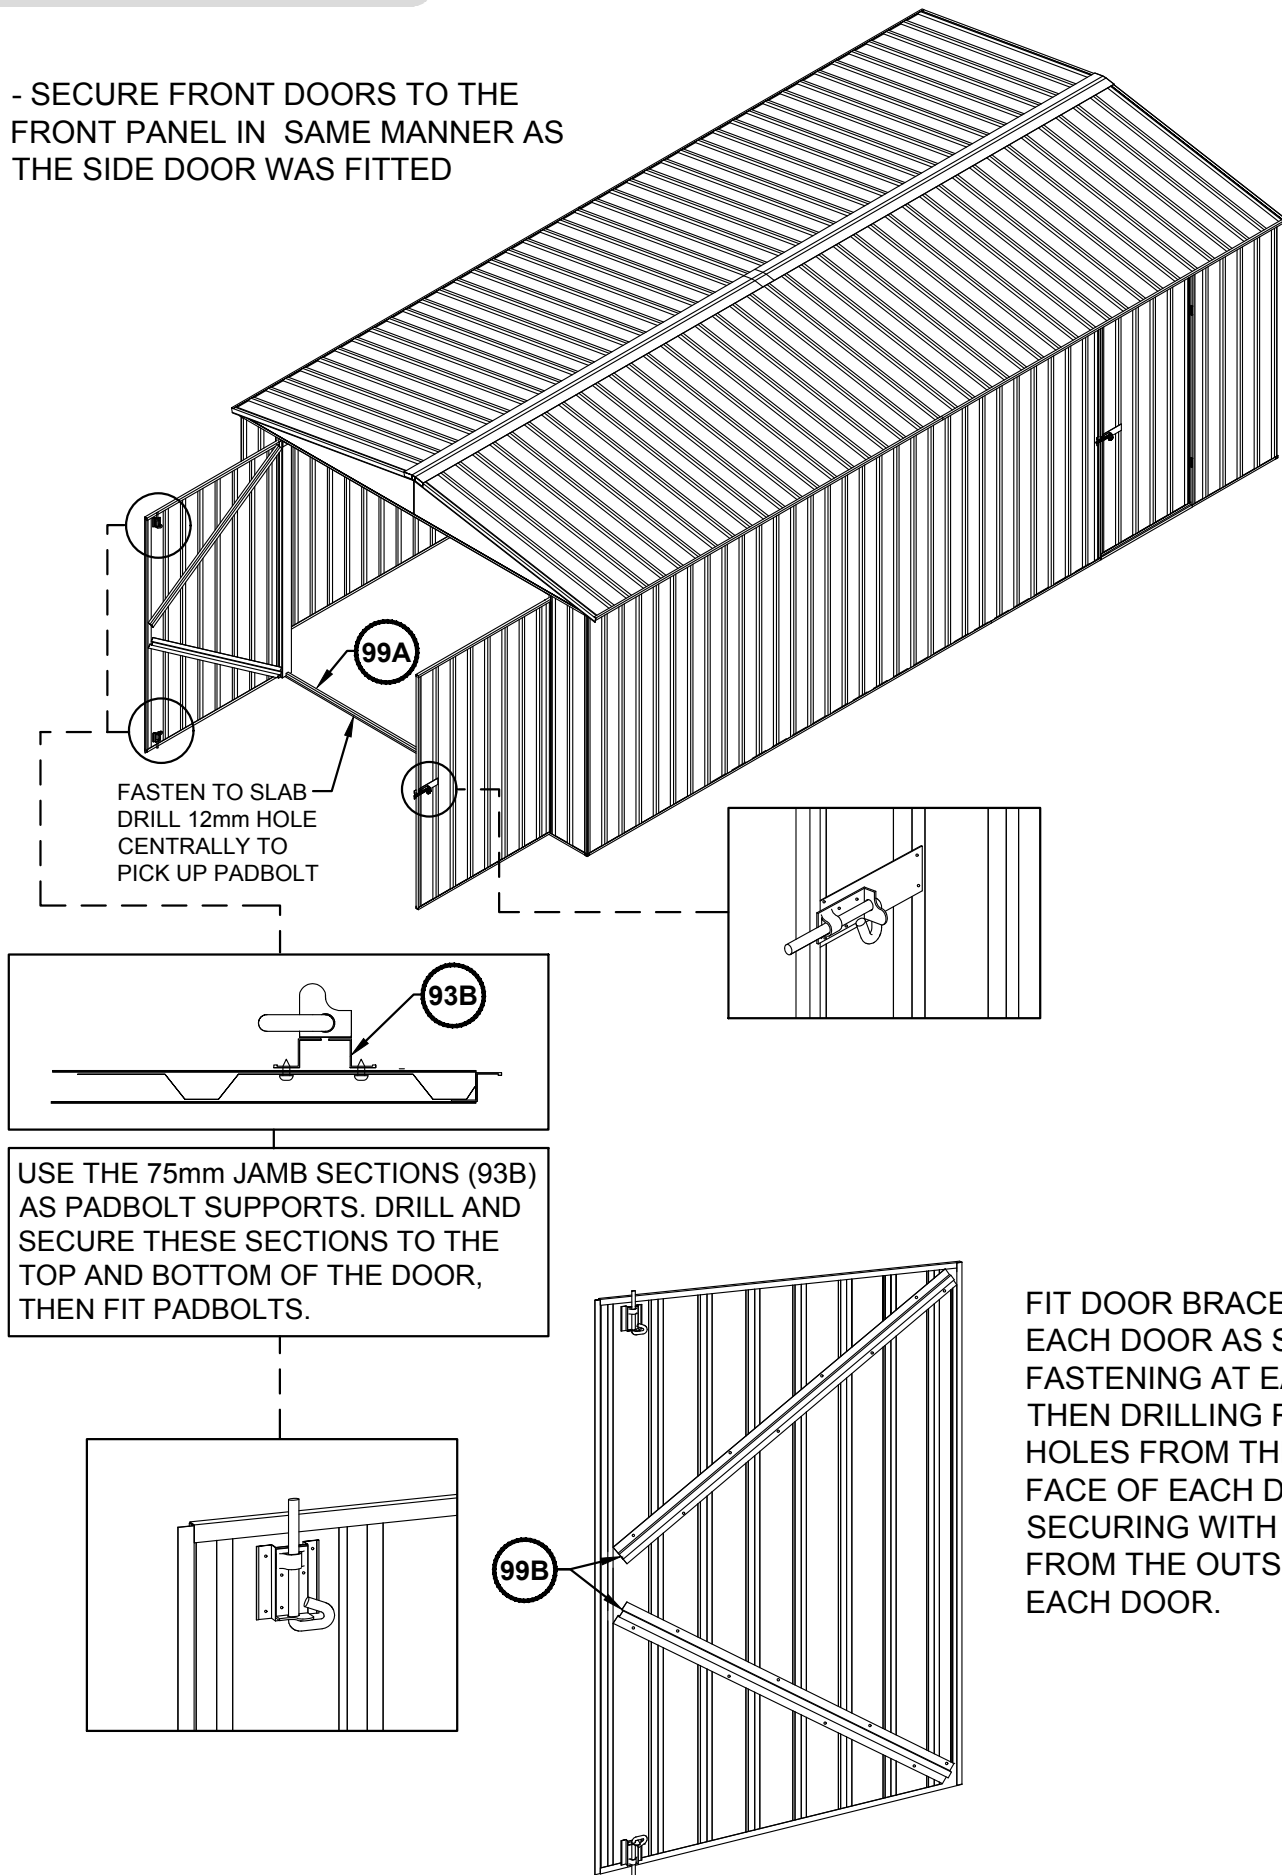




## **ABSCO UTILITY SHED MODELS: 3060UT & 3045UT FRONT FRAME ASSEMBLY SUPPORT PHOTOGRAPHS**


<b>STEP 1A, B, C:</b>	<b>Draw pattern on concrete (Ref, pg 22).</b>
<b>STEP 2:</b>	<b>Understand where components are to be positioned</b>
<b>STEP 3A, B, C:</b>	<b>Join C0100 to C1785</b>
<b>STEP 4A, B:</b>	<b>Join C1785 to M1484</b>
<b>STEP 5A, B, C, D, E, F:</b>	<b>Join K0285 to C1785 &amp; N1820</b>
<b>STEP 6A, B, C:</b>	<b>Fit multi purpose bracket</b>
<b>STEP 7A, B, C, D, E:</b>	<b>Assemble the C0240 &amp; C2300 sections</b>
<b>STEP 8A, B, C, D, E:</b>	<b>Join all sections together</b>
<b>STEP 9A, B:</b>	<b>Turn frame over and repeat steps 4 to 8</b>
<b>STEP 10:</b>	<b>Fully Assembled front frame</b>




## Step 1a

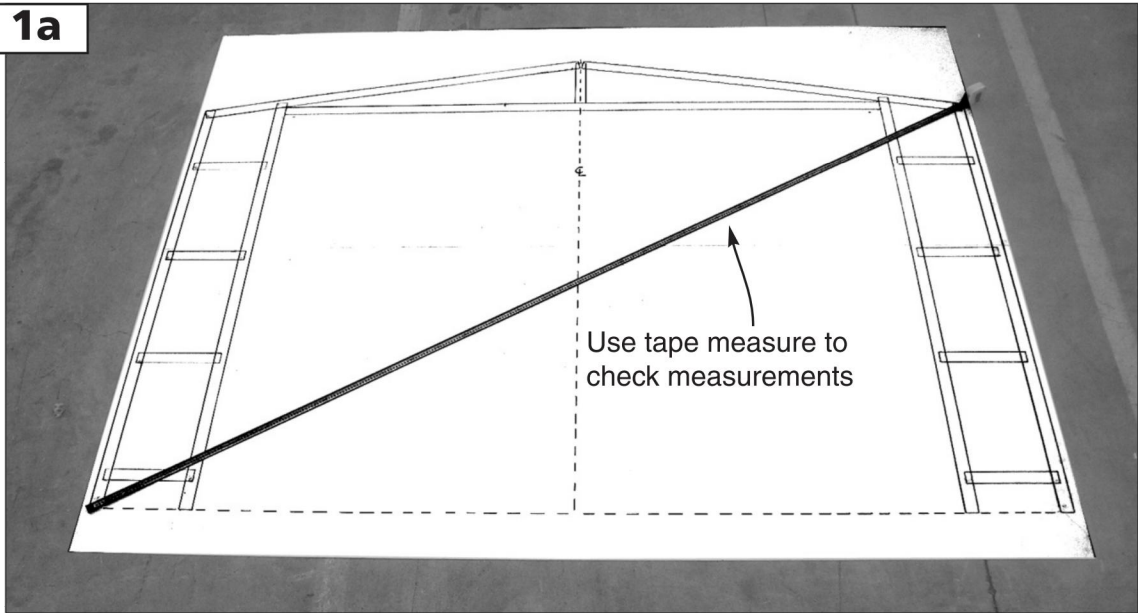


## Step 1b

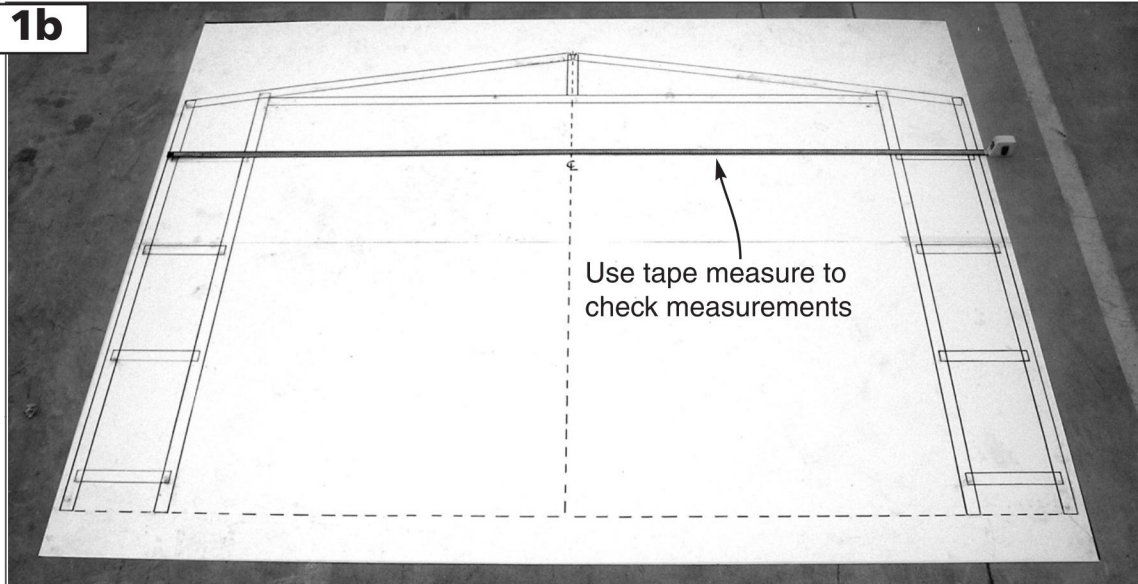


## Step 1c

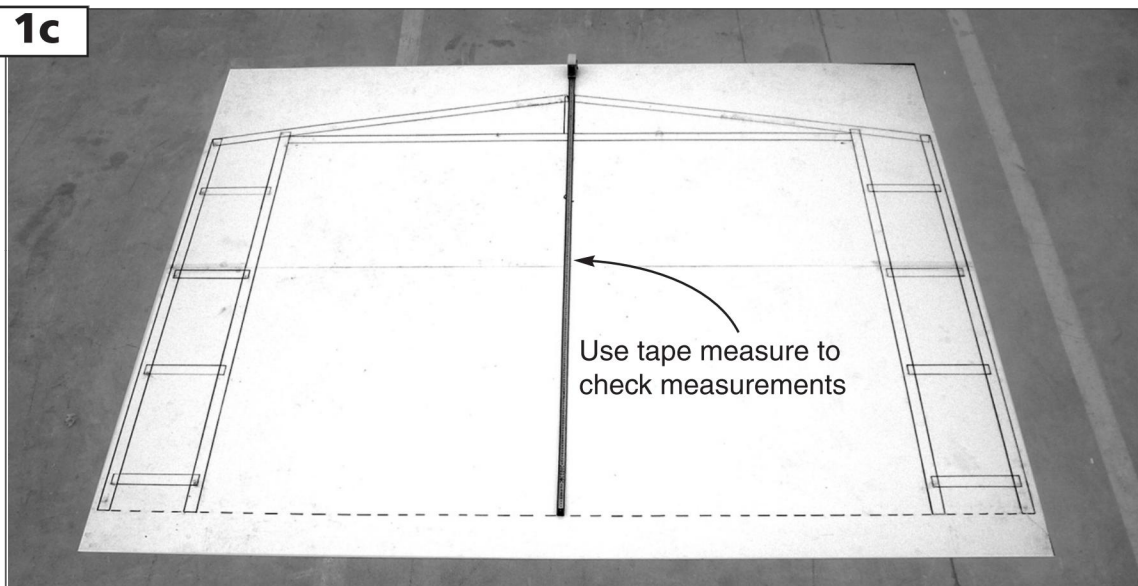


## Step 2

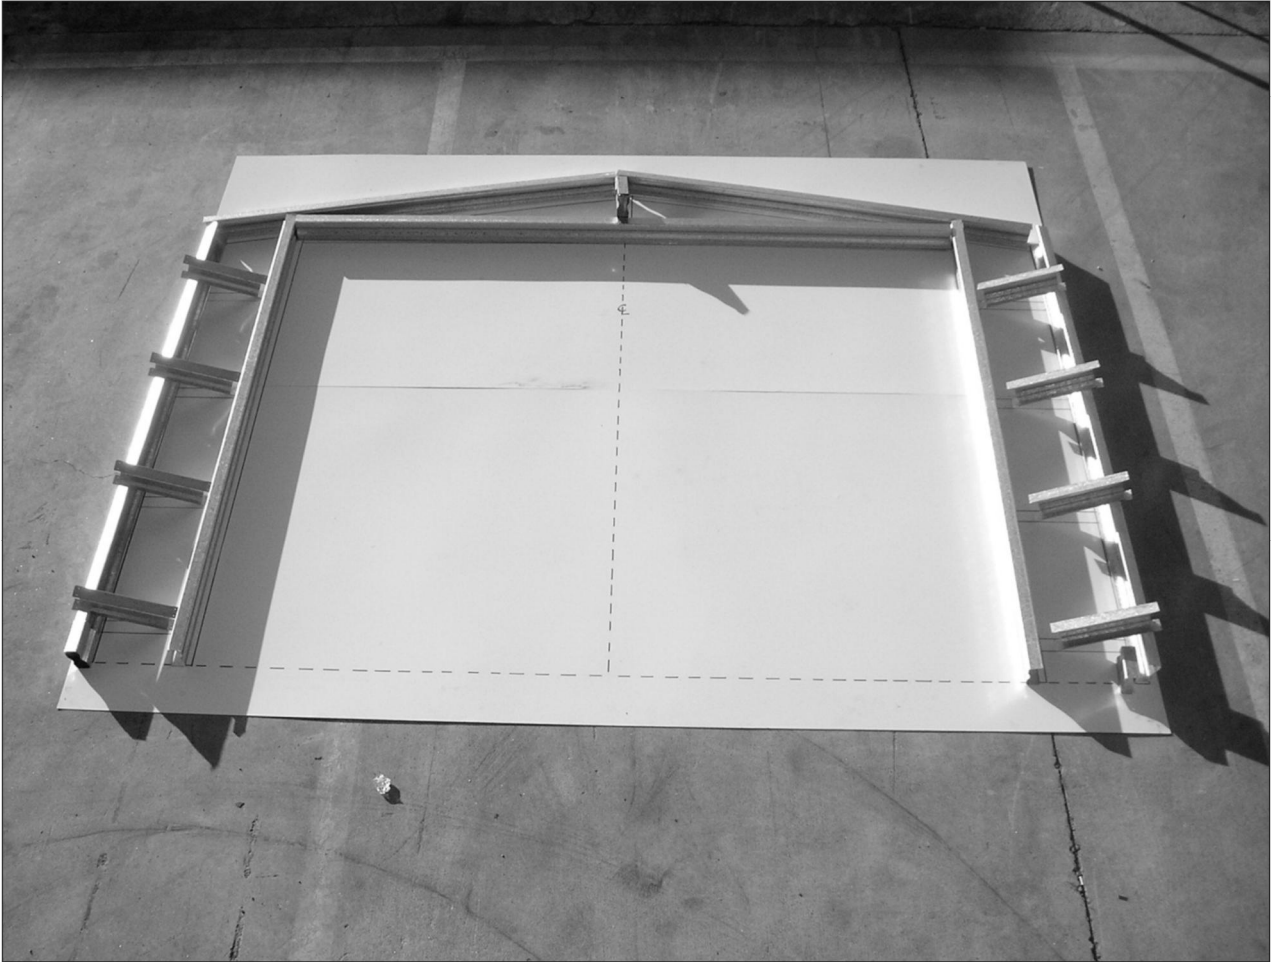


**Step 3a**

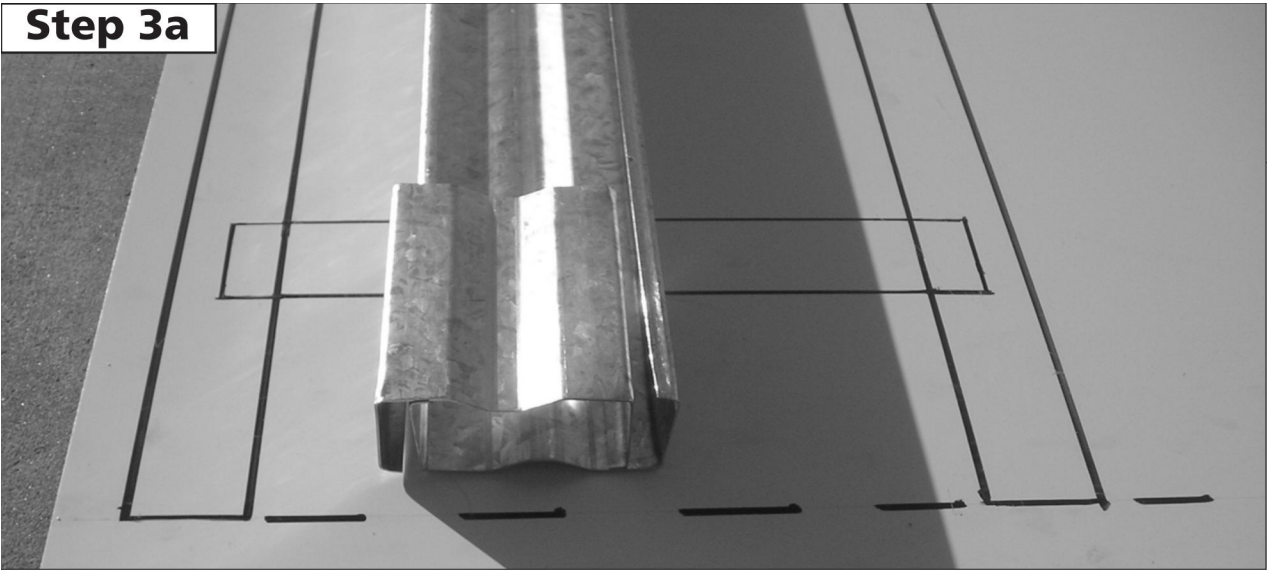

**Step 3b**

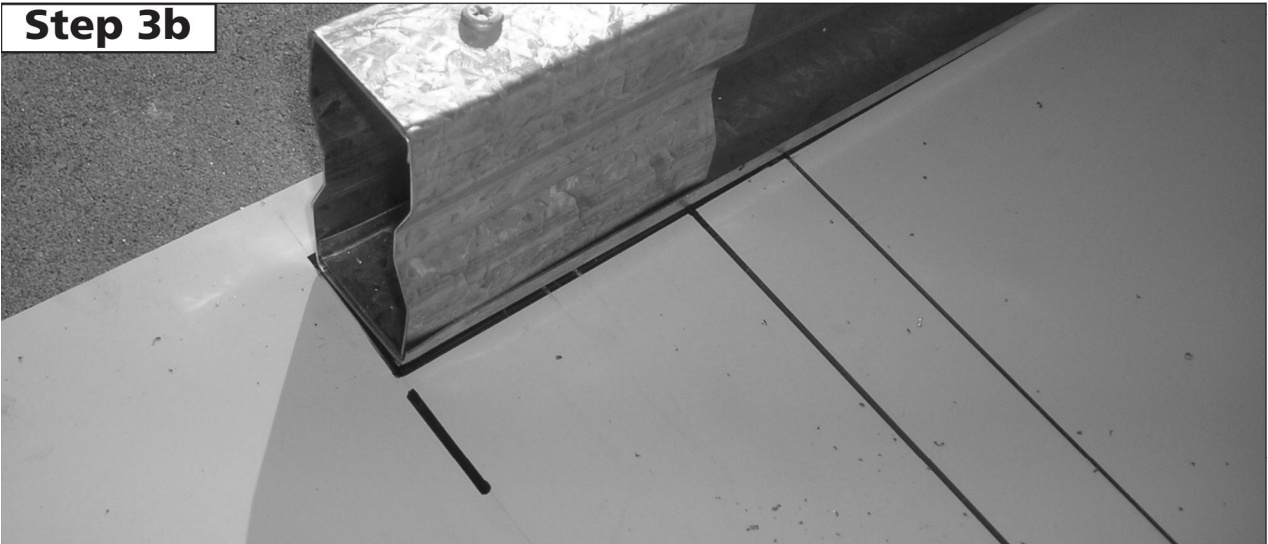

**Step 3c**

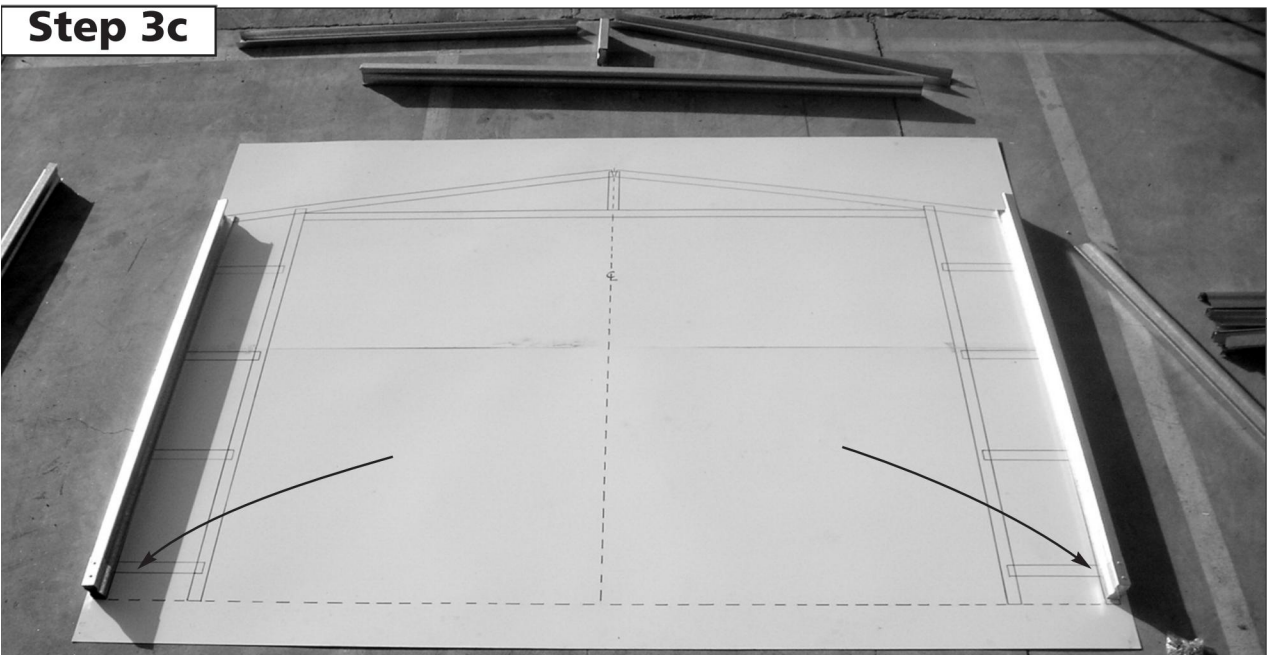




## Step 4a




## Step 4b

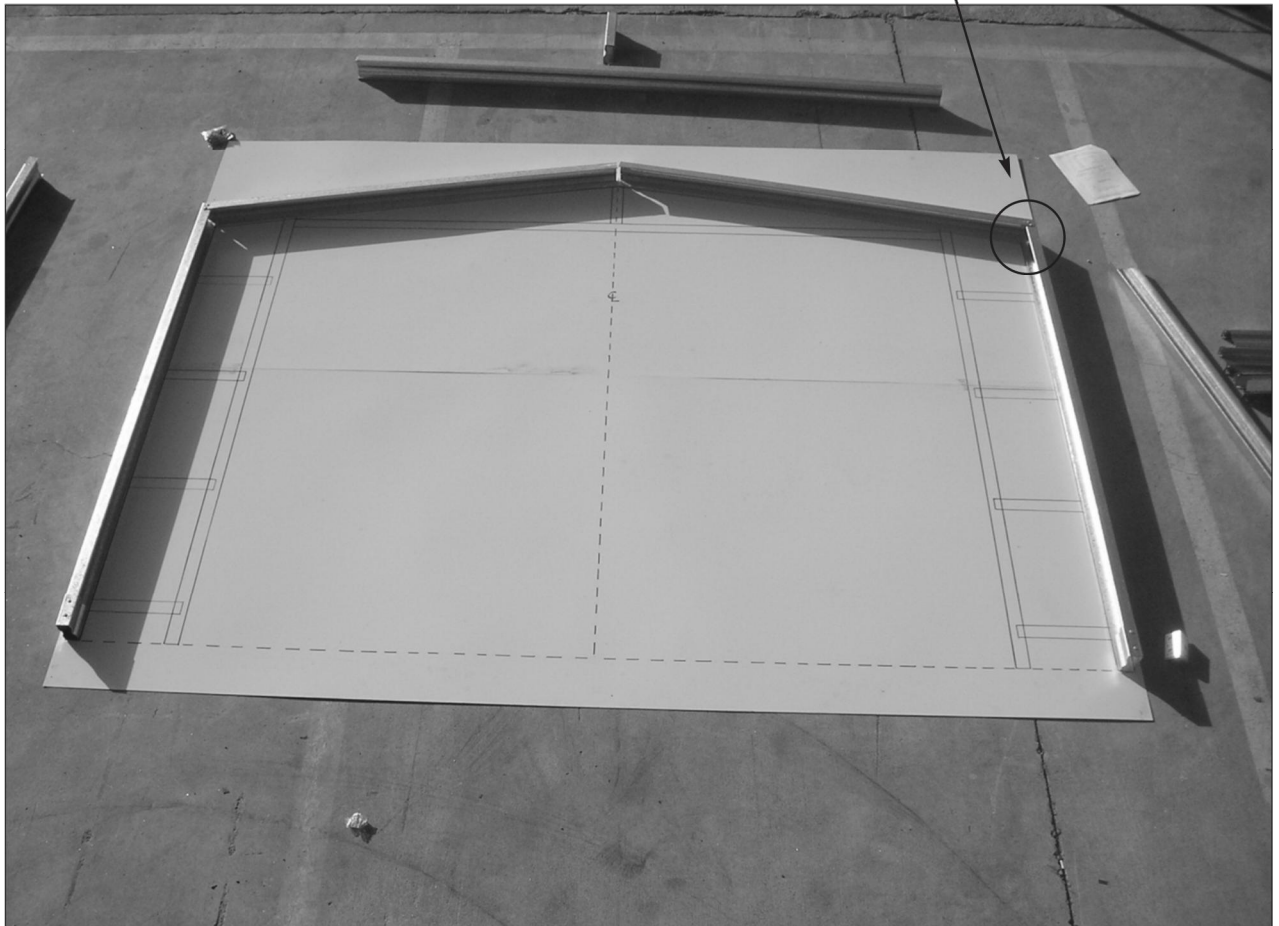


**Step 5a**




**Step 5b**

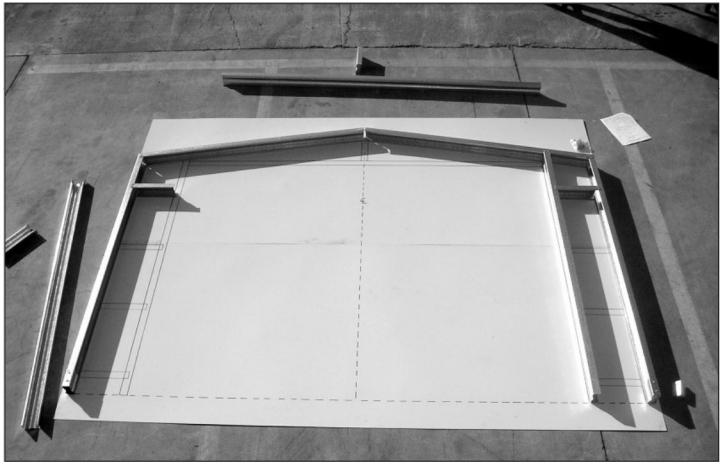


**Step 5c**

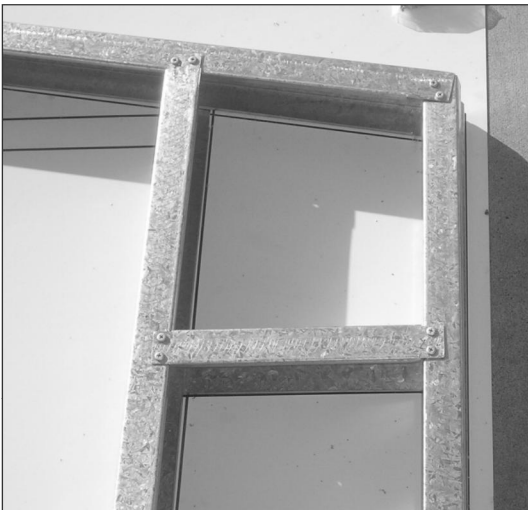


**Step 5d**

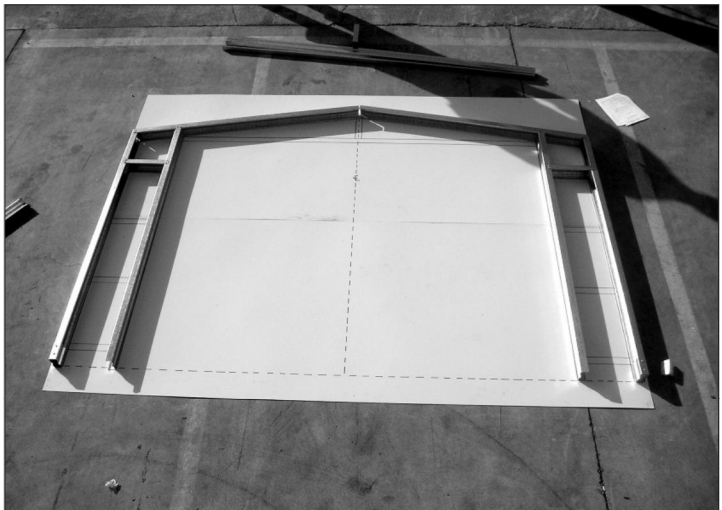

**Step 5e**

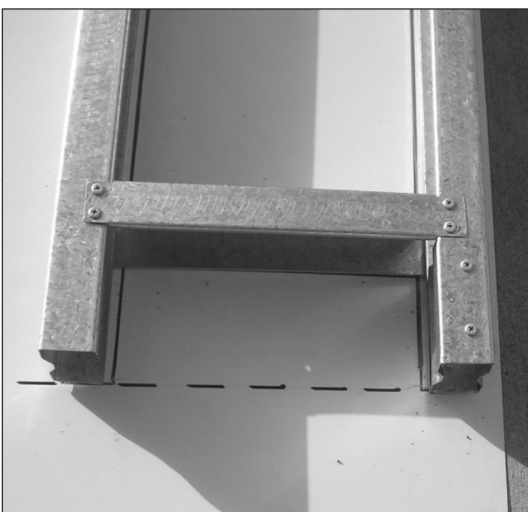


**Step 5f**

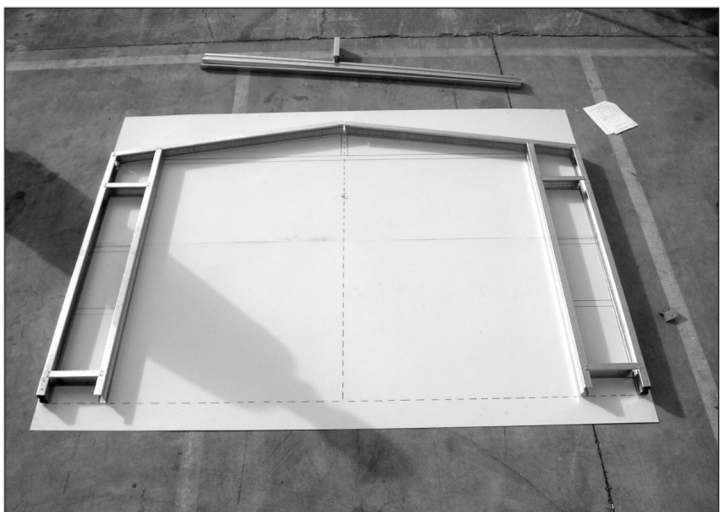





## Step 6a

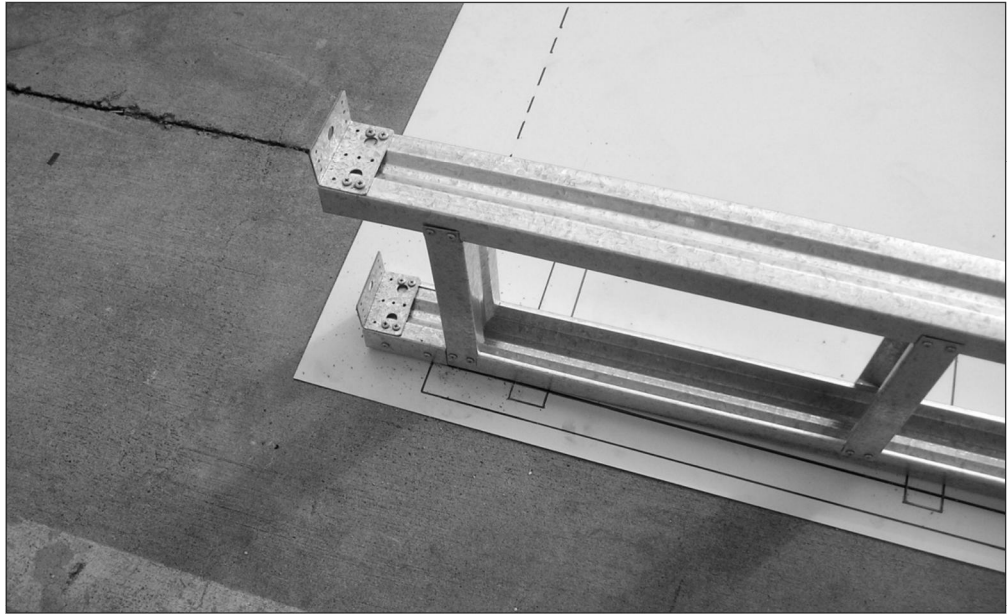

## Step 6b

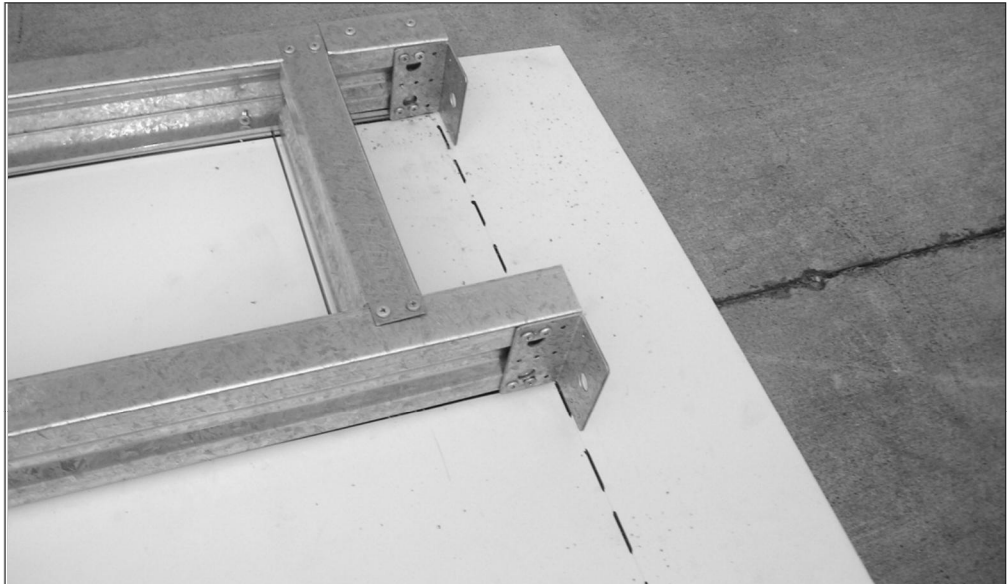


## Step 6c

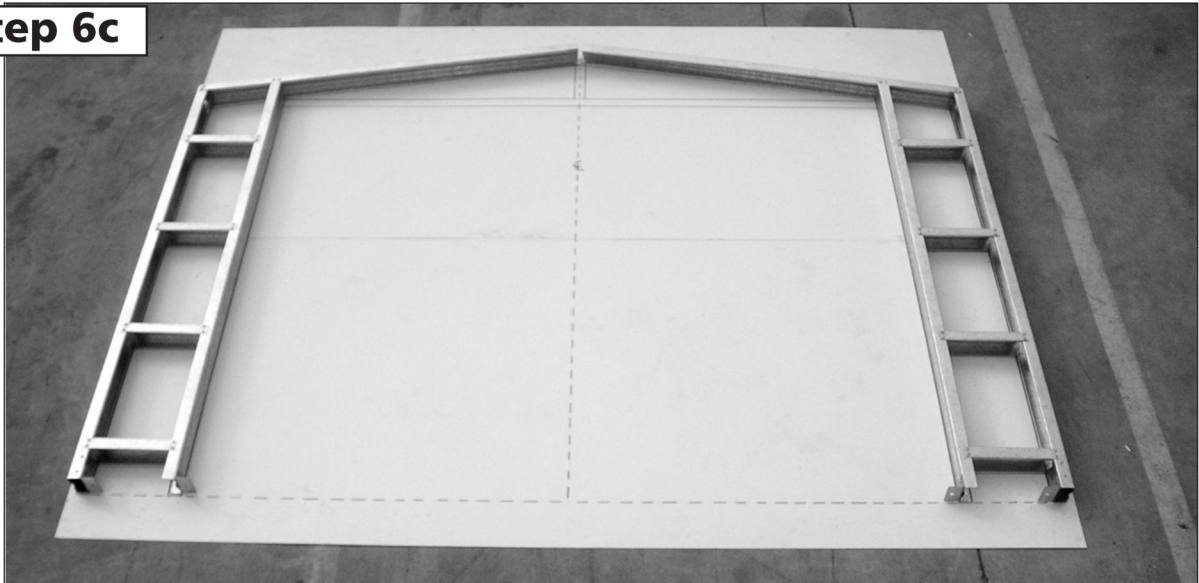





**Step 7a**

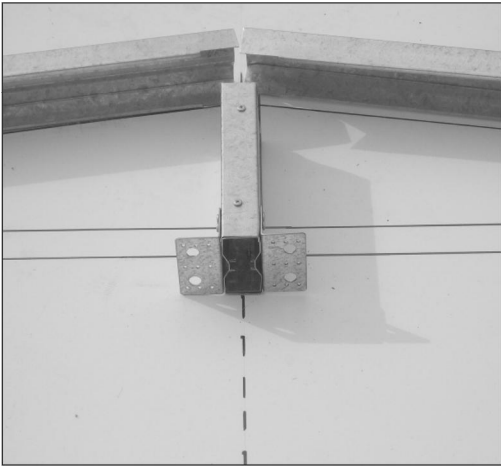


**Step 7b**

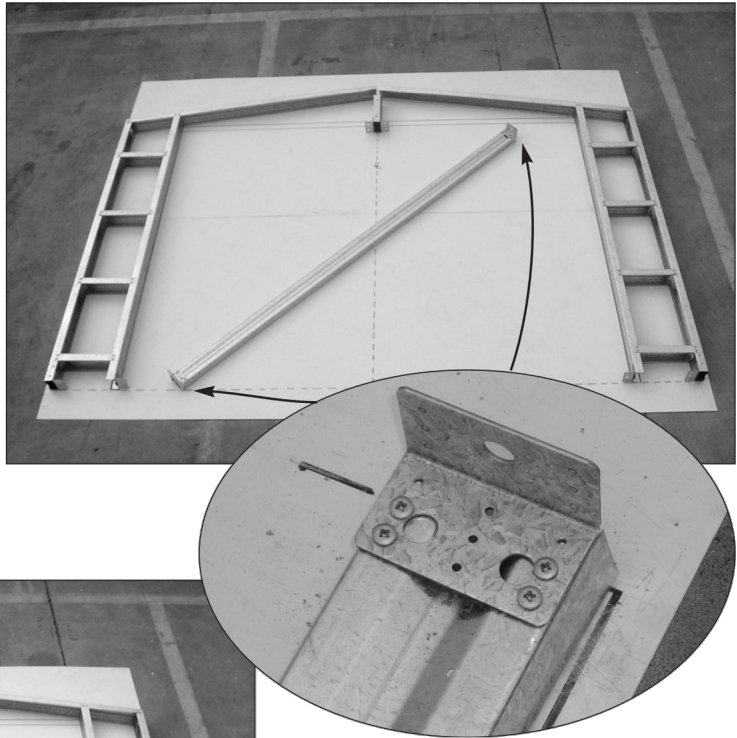


**Step 7c**

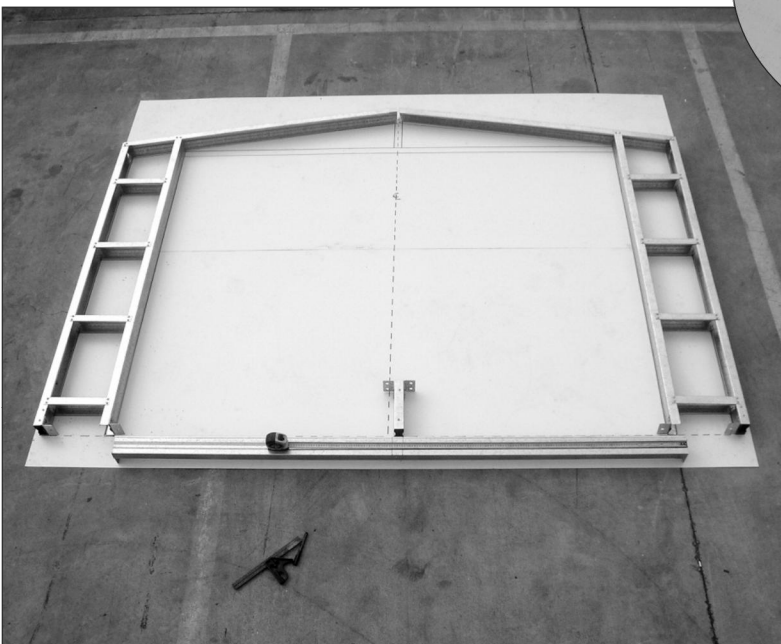

**Step 7d**

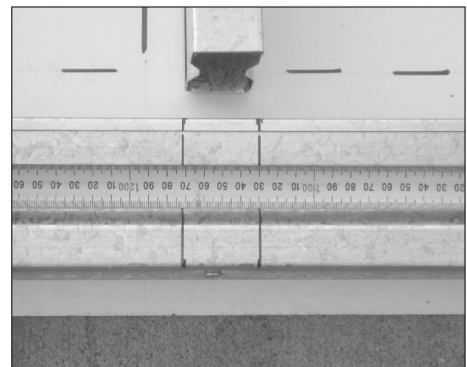

**Step 7e**

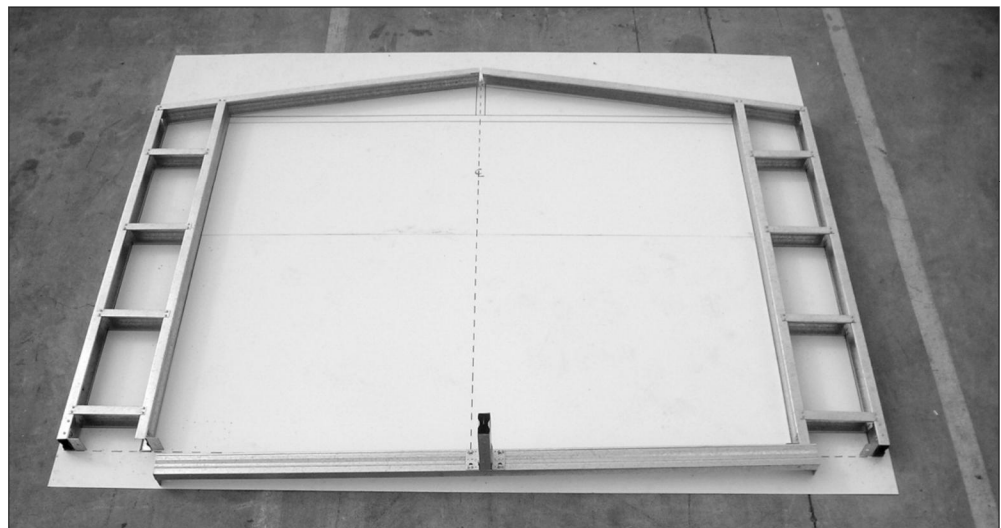

**Step 8a**



**Step 8b**



**Step 8c**



**Step 8d**




**Step 8e**







## Step 9a

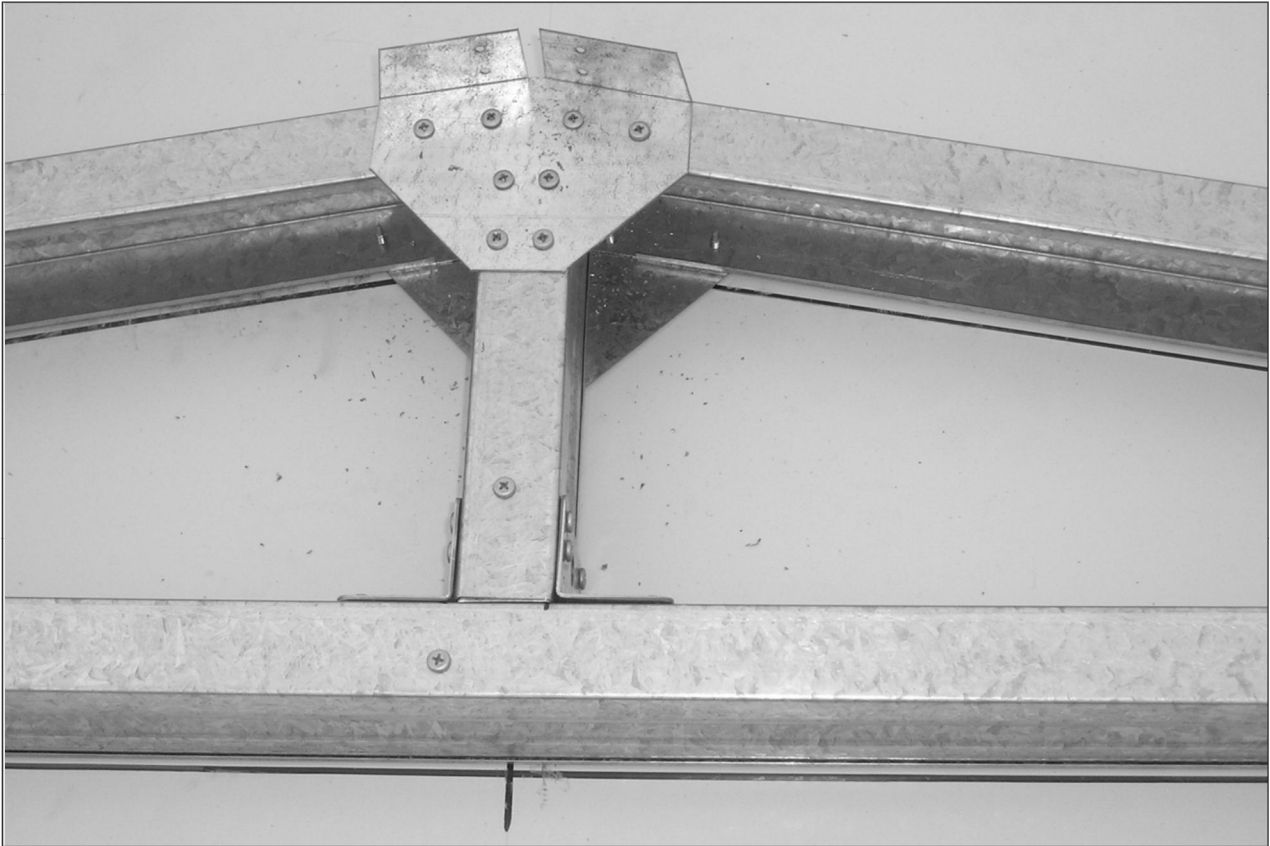

## Step 9b

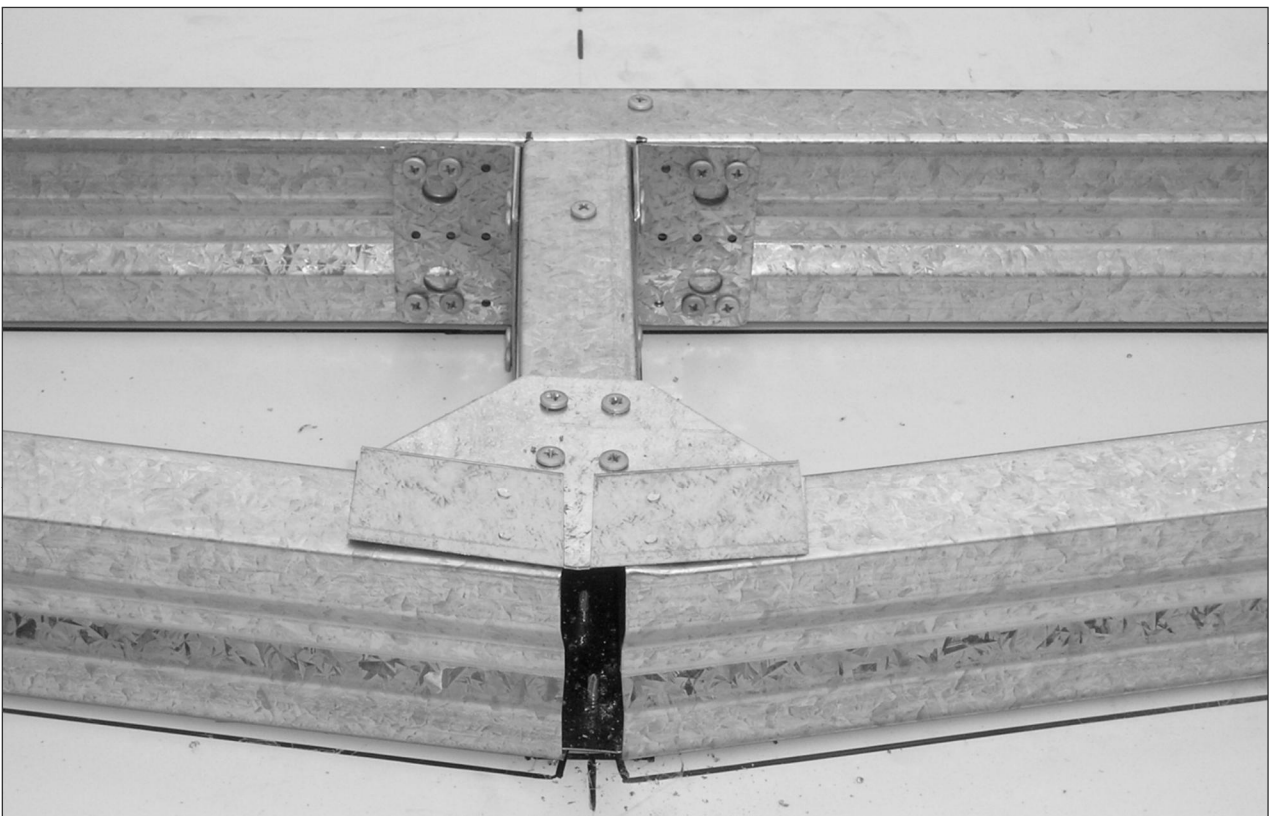

## Step 10

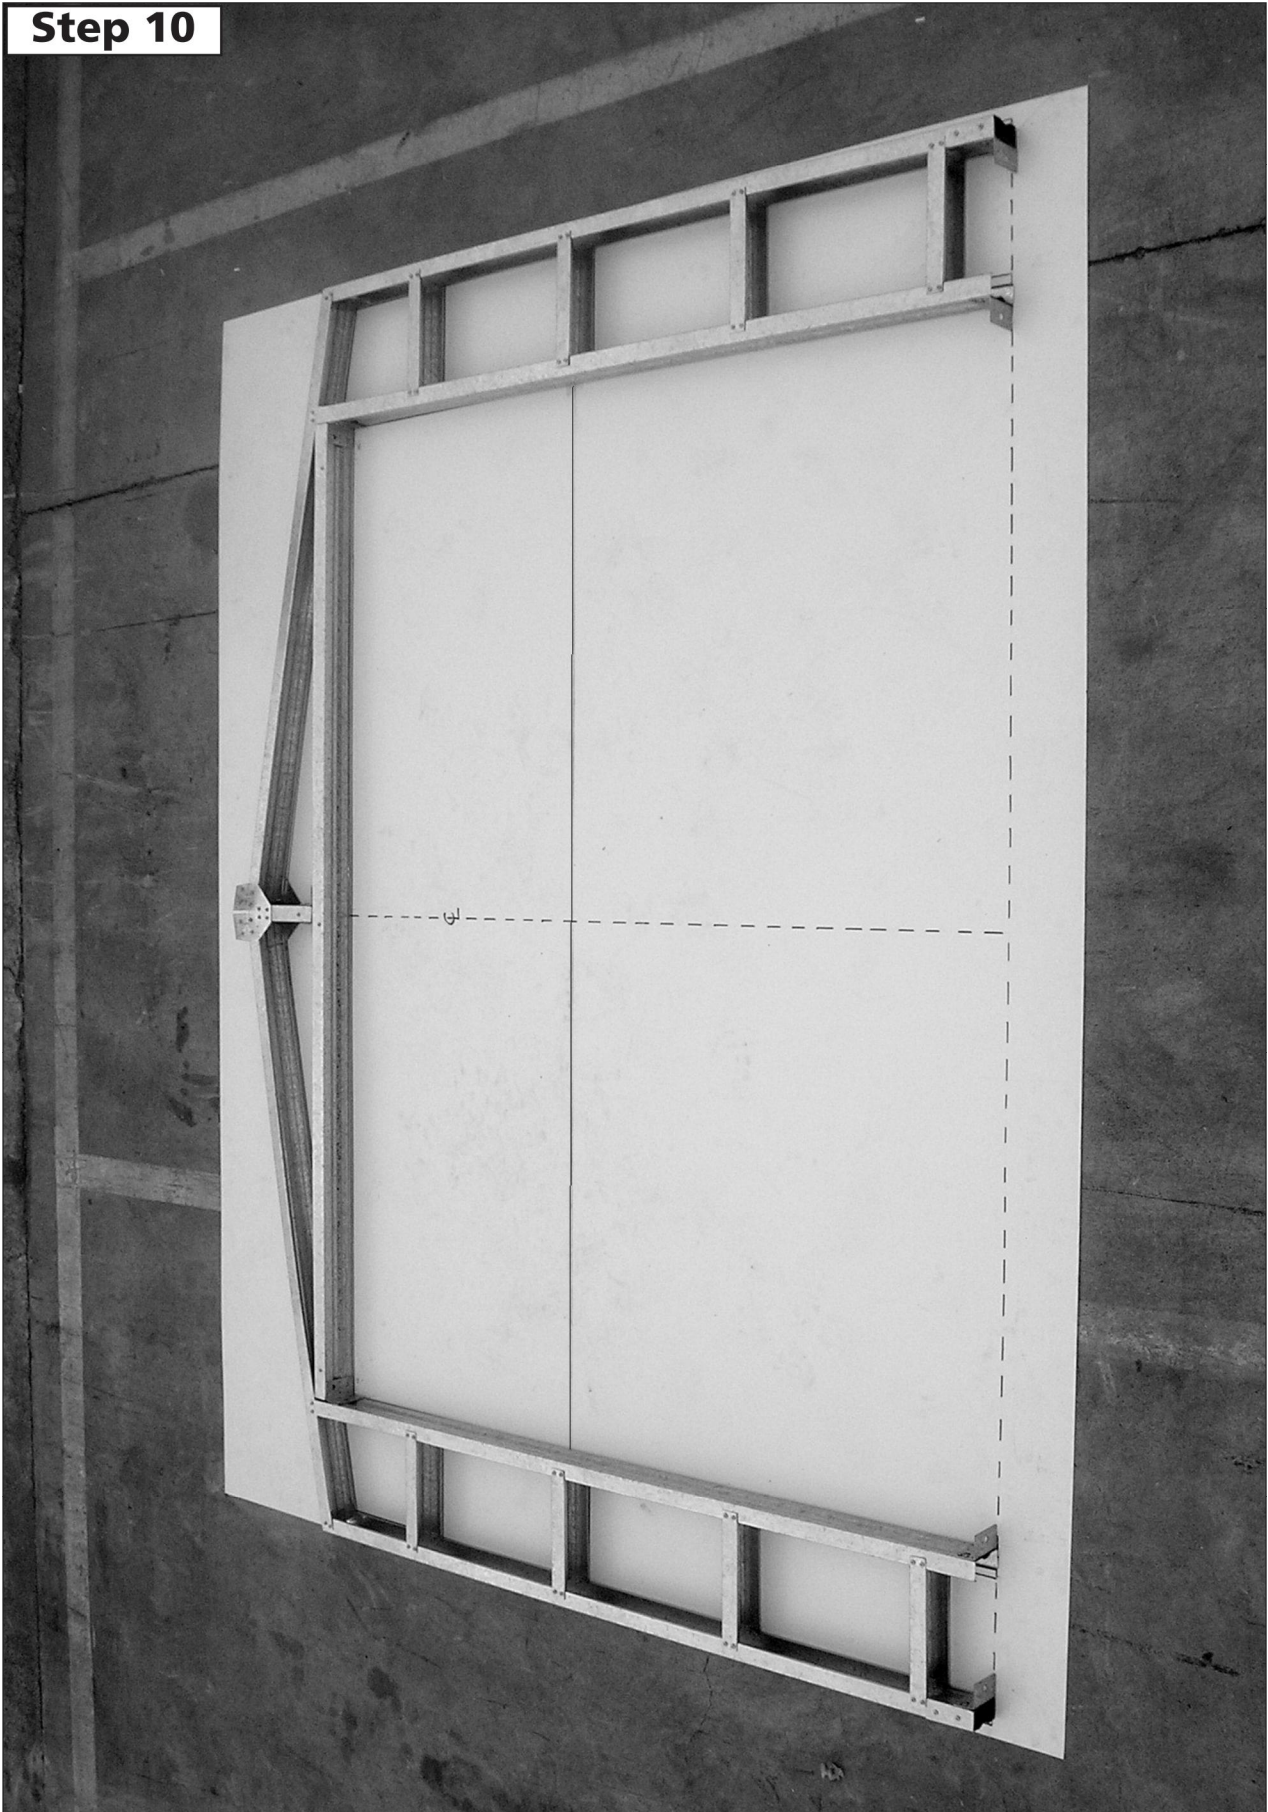



## **ABSCO CENTRE PORTAL FRAME ASSEMBLY ASSEMBLY SUPPORT PHOTOGRAPHS**

**STEP 1A, B, C:** Draw pattern on concrete, in accordance with the dimensions detailed in the assembly instruction.

**STEP 2A, B, C:** Understand where components are to be positioned

**STEP 3A, B, C:** Join C1482 to C1704

**STEP 4A, B, C:** Join C1482 to C1482


**STEP 5A, B:** Secure ridge plate (RBP)

**STEP 6A, B:** Secure multi purpose brackets


**STEP 7A, B, C, D:** Turn frame over, repeat steps 4,5




## Step 1a

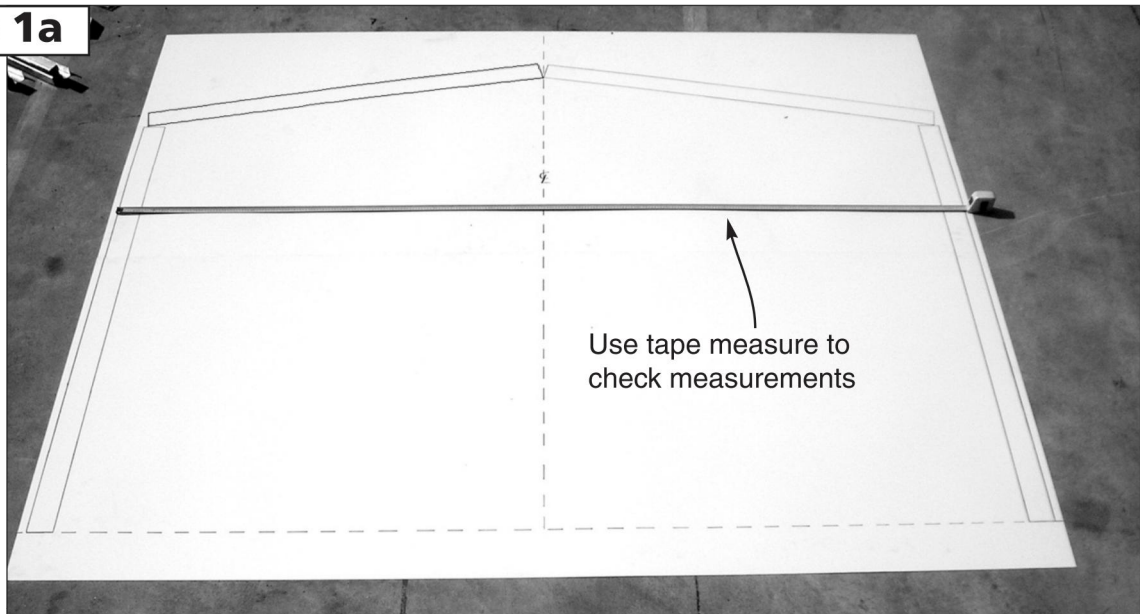

## Step 1b

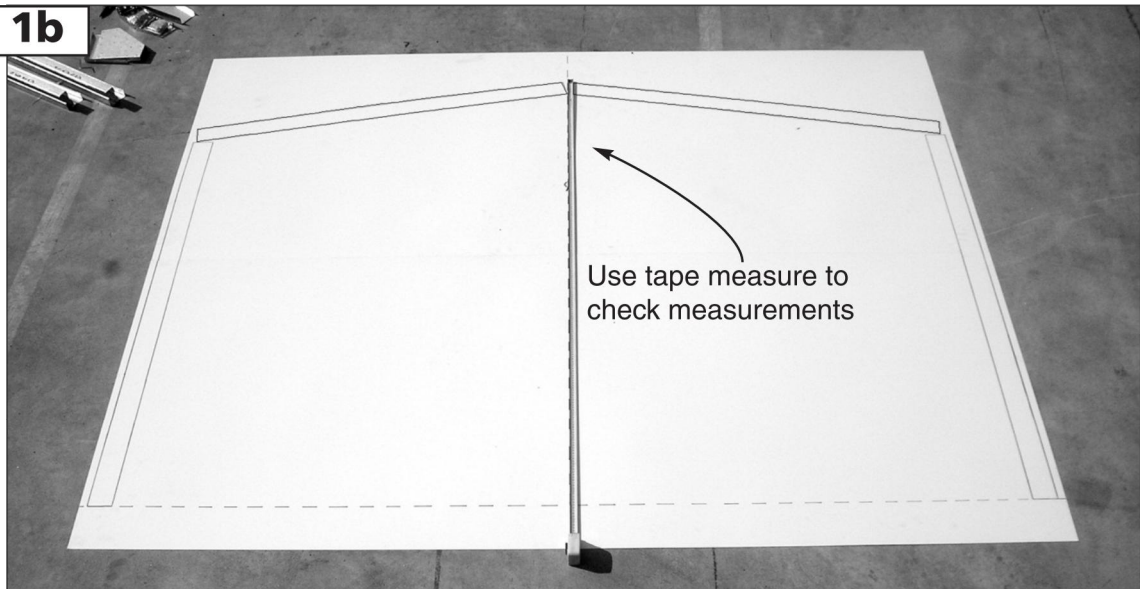


## Step 1c

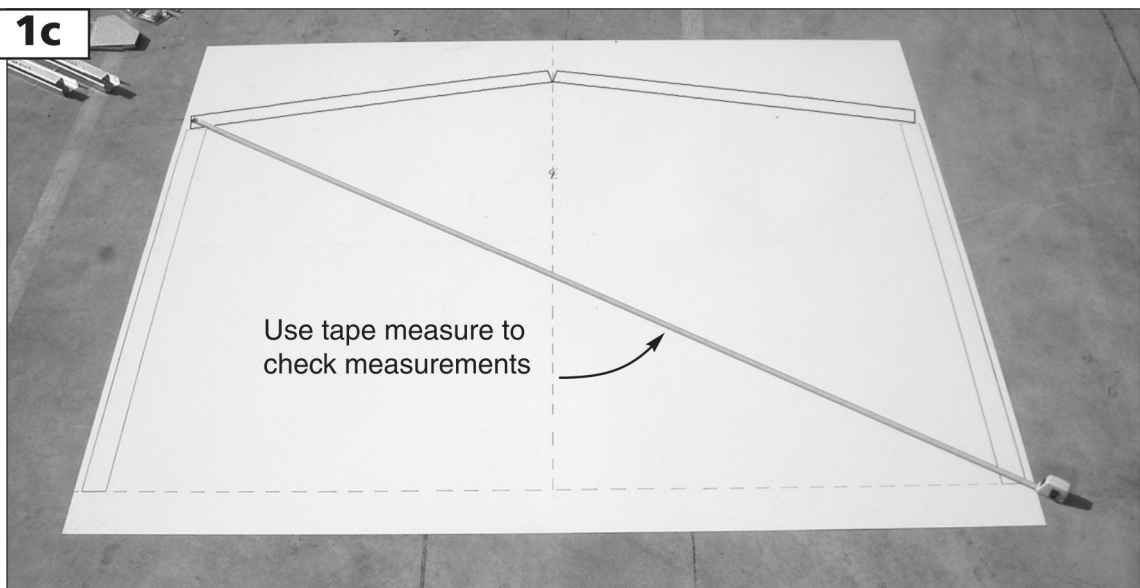





**Step 2a**

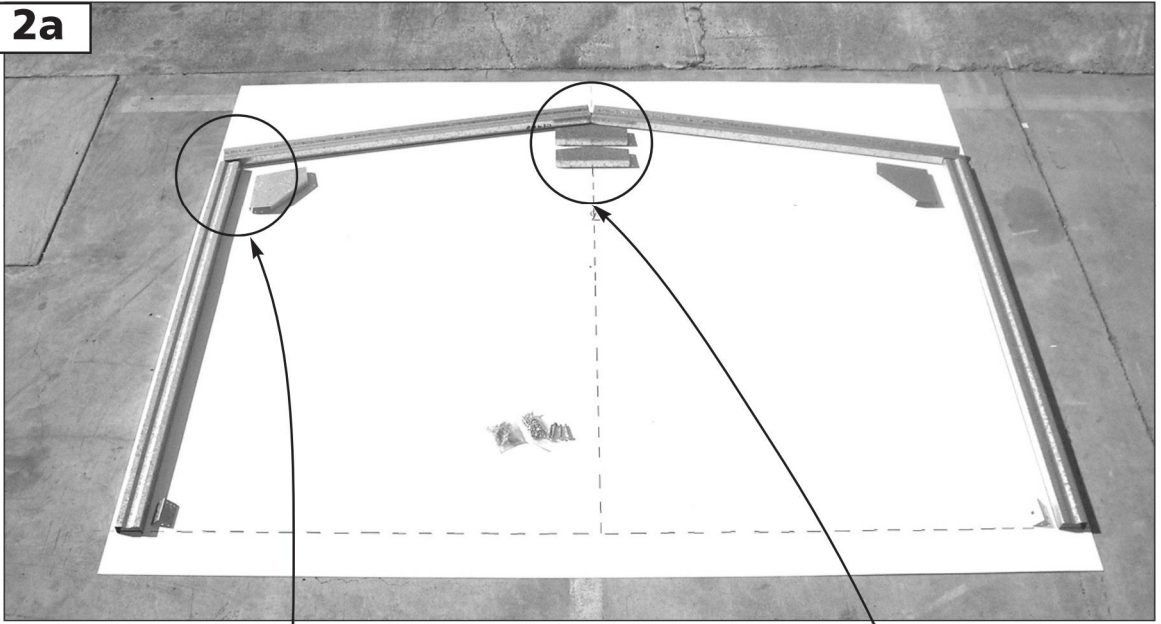

**Step 2b**

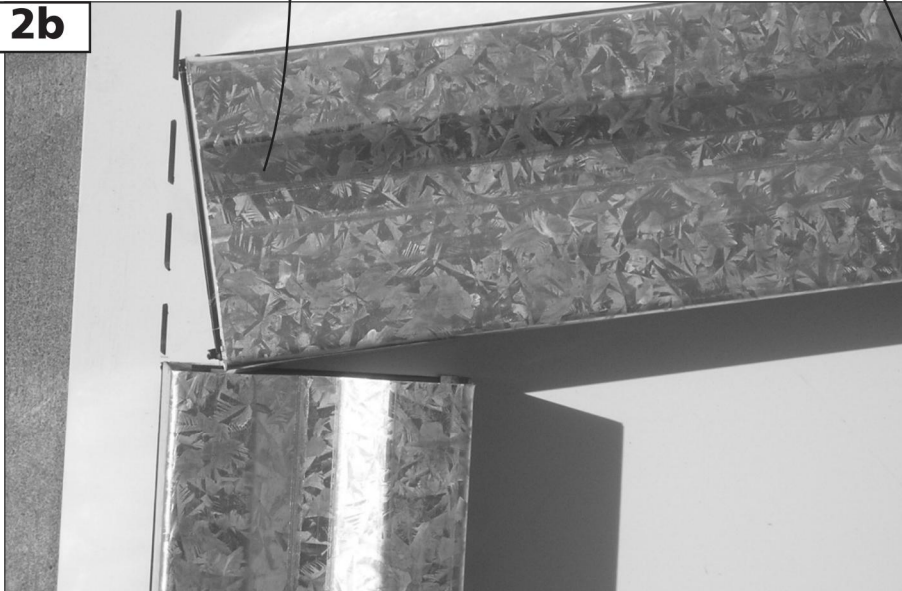


**Step 2c**

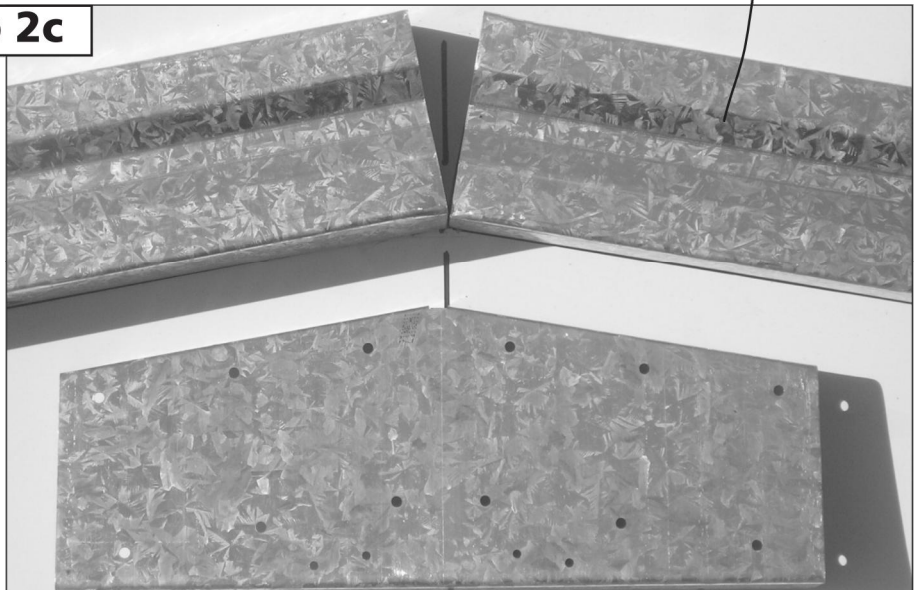


**Step 3a**




**Step 3b**

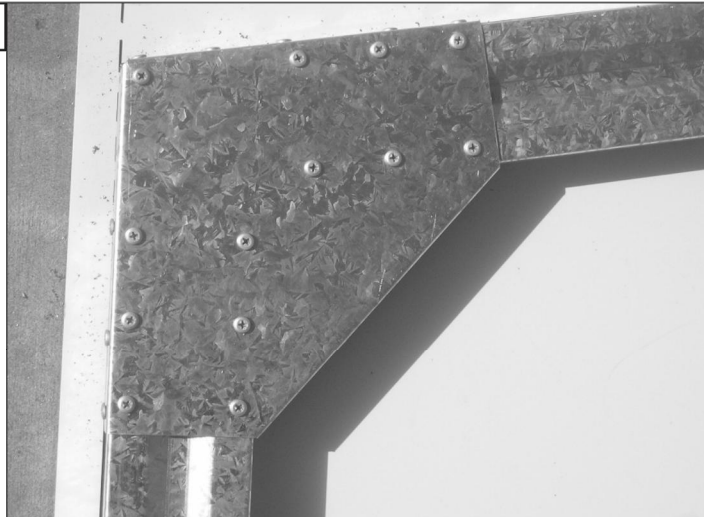


**Step 3c**

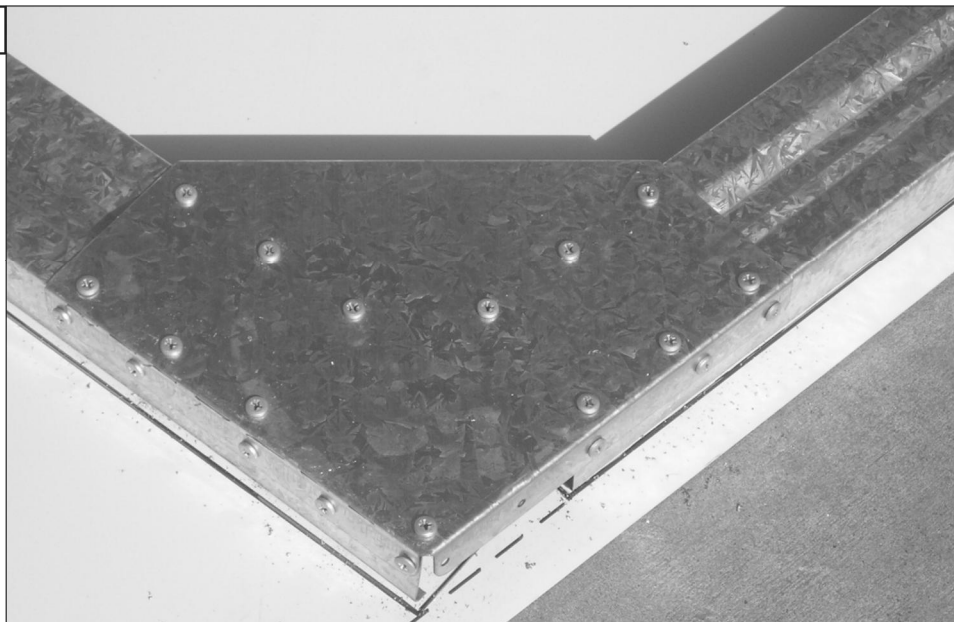


**Step 4a**

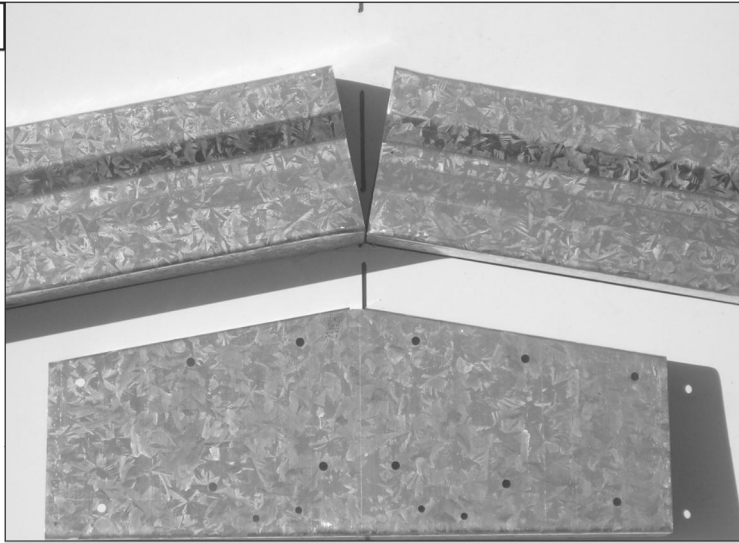

**Step 4b**

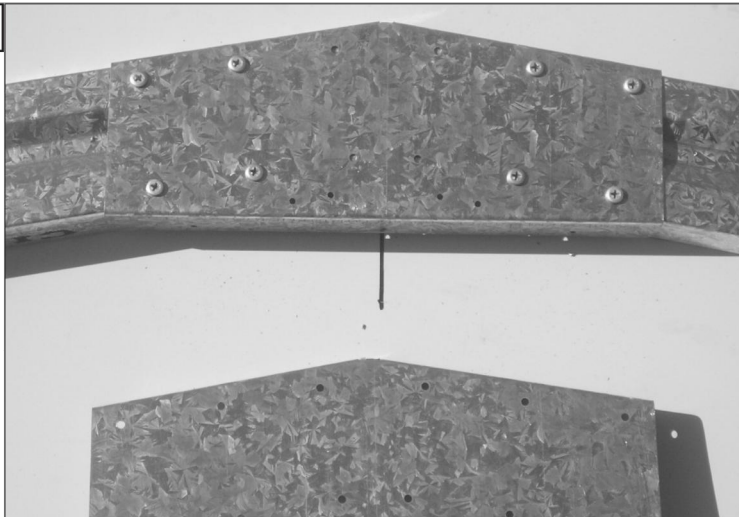


**Step 4c**

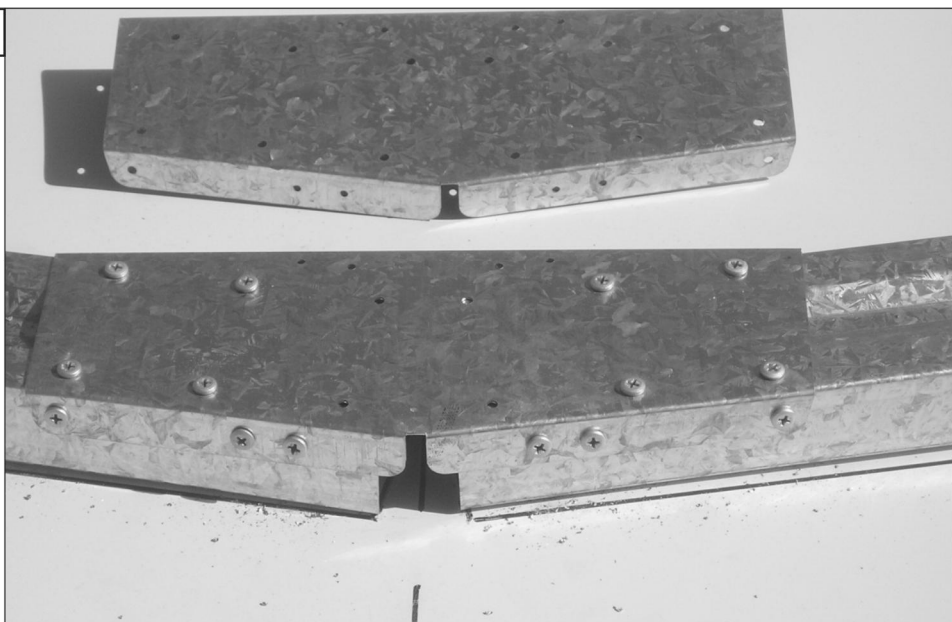





**Step 5a**

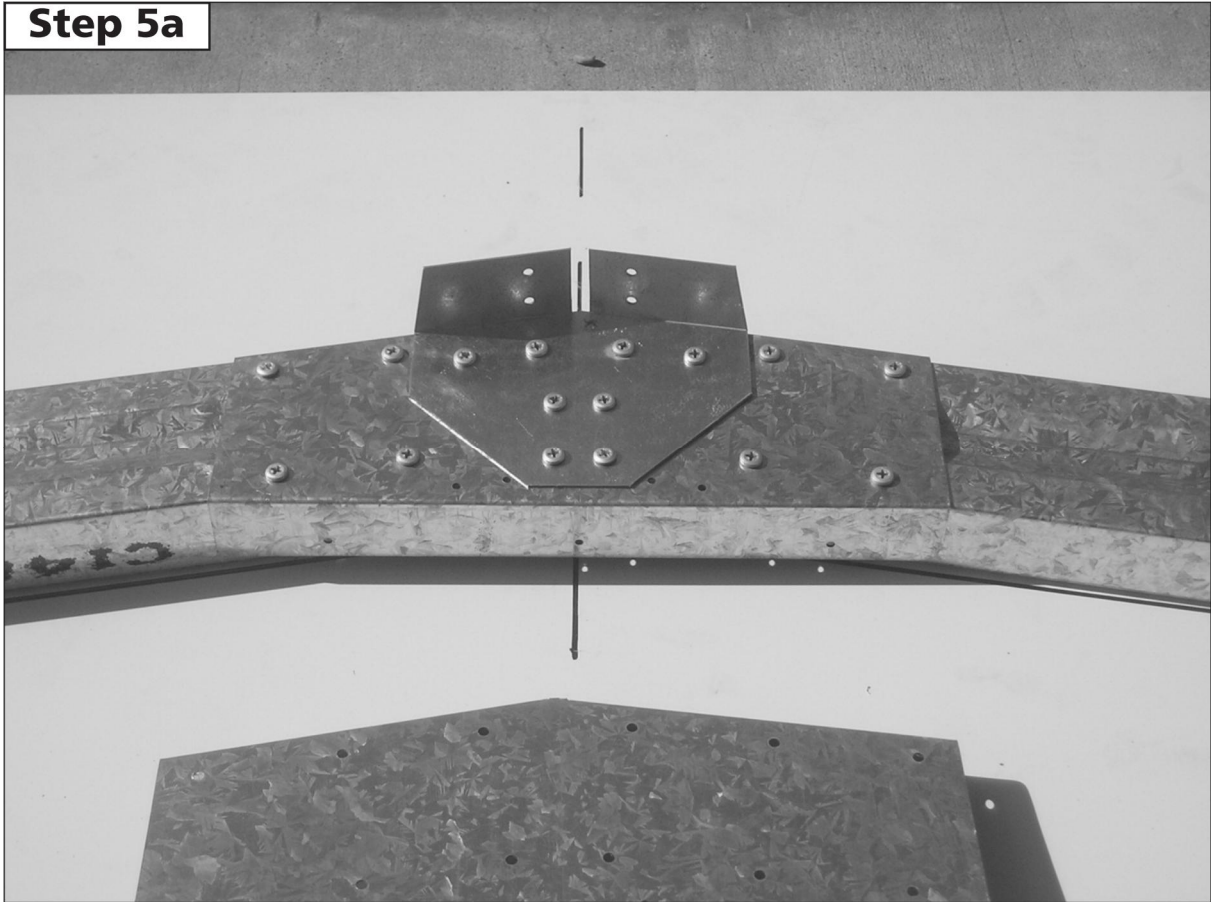


**Step 5b**

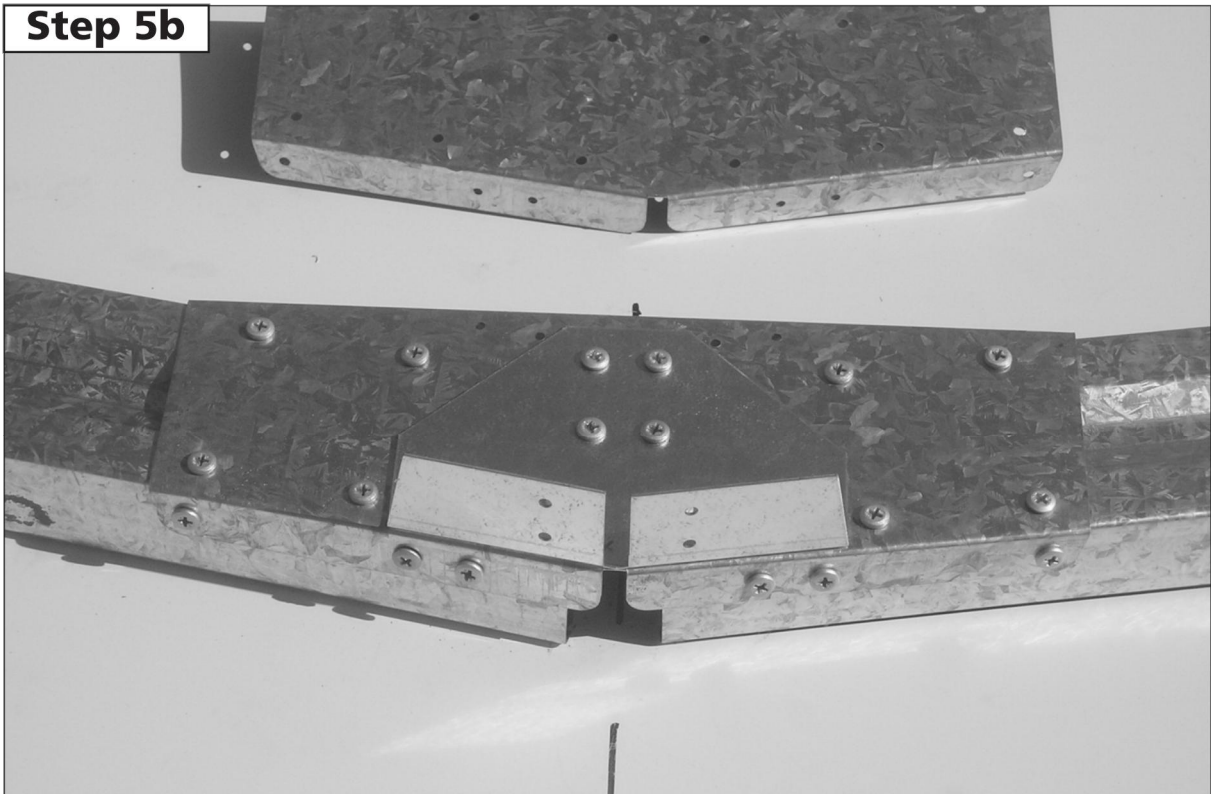





**Step 6a**

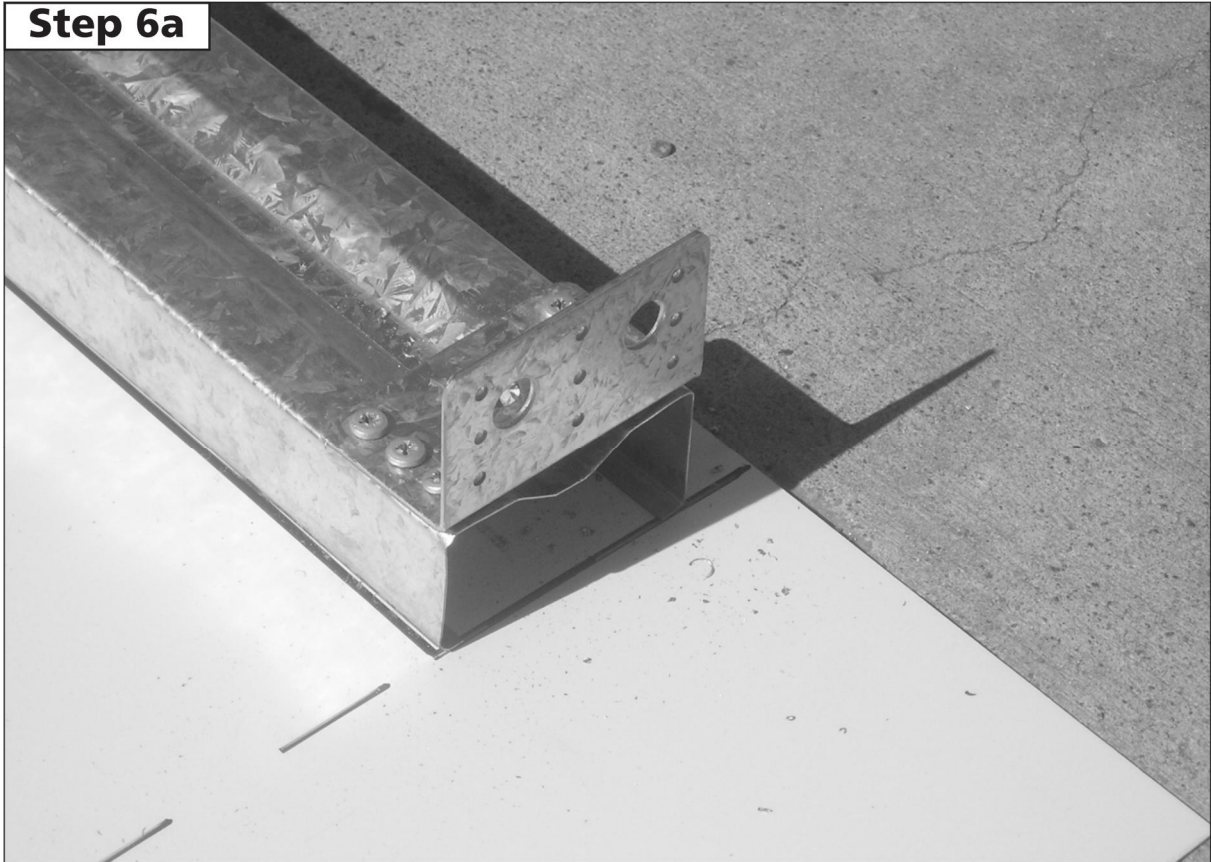

**Step 6b**

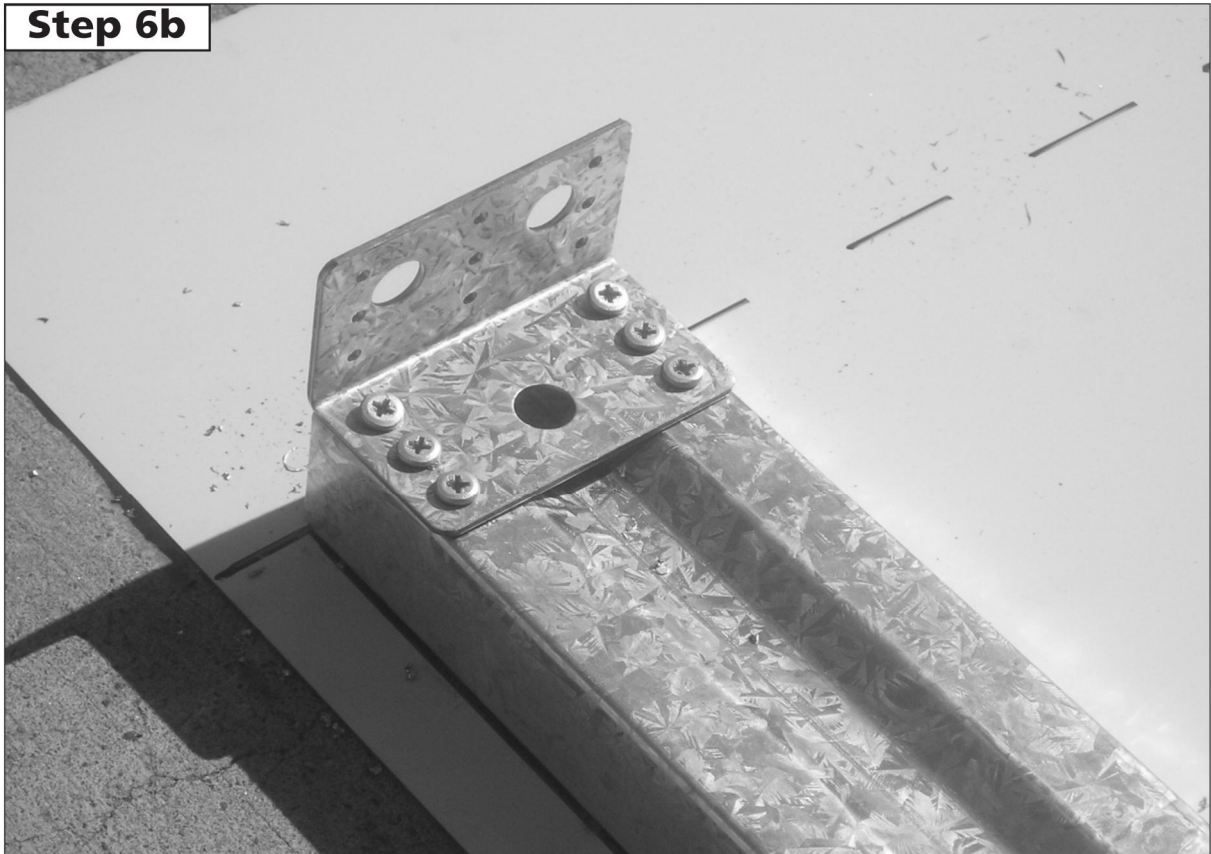



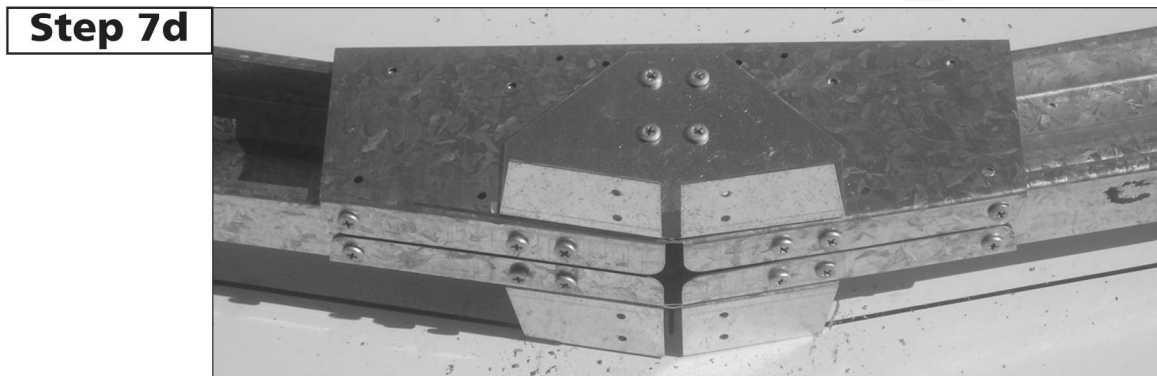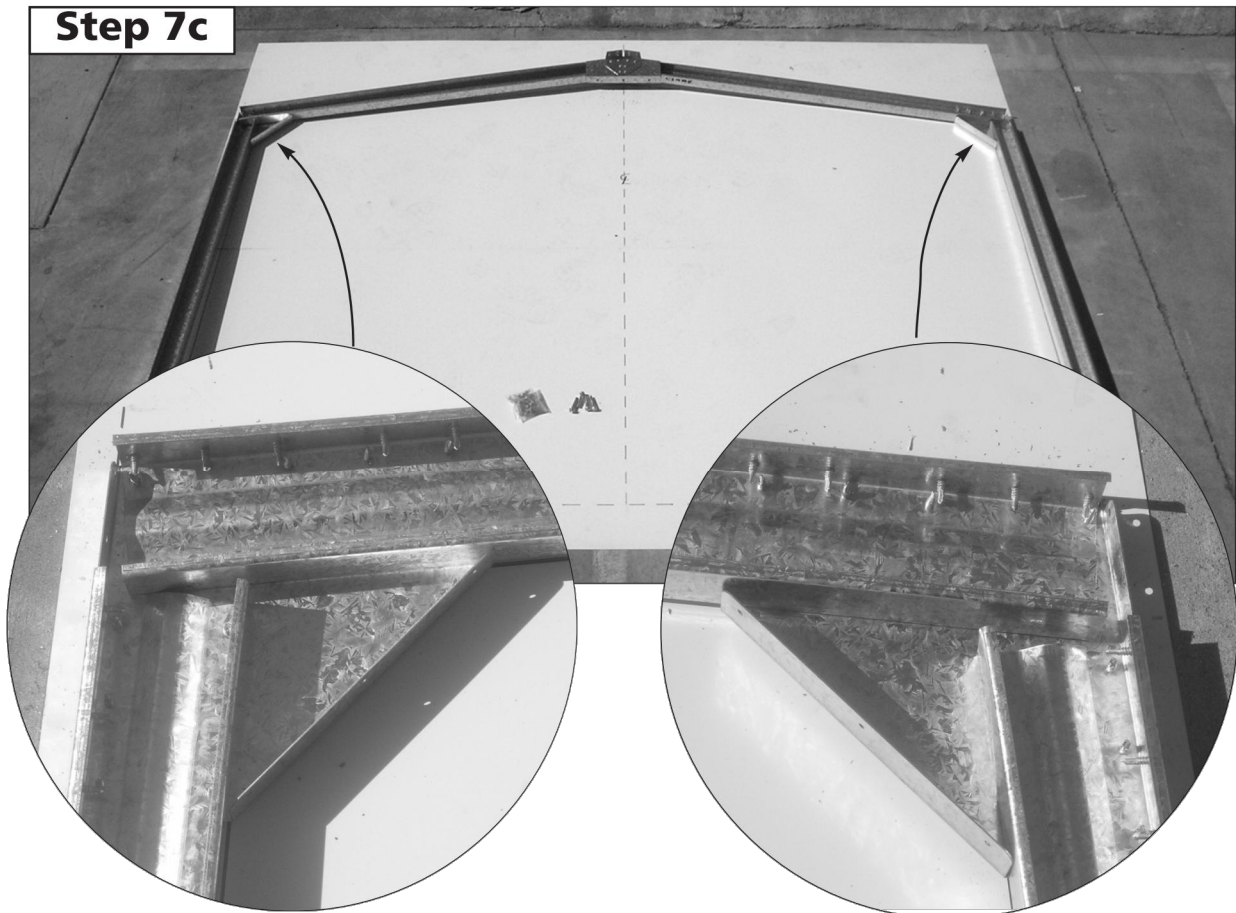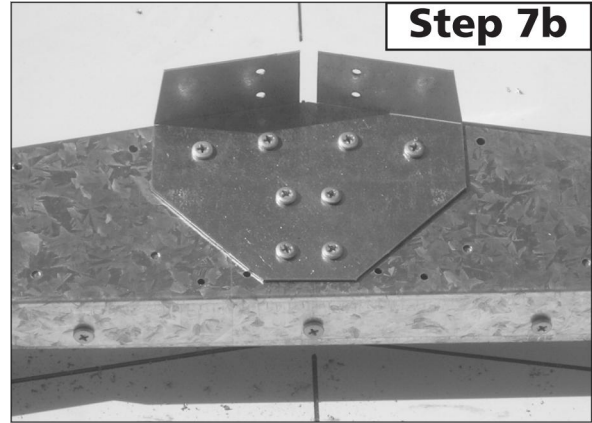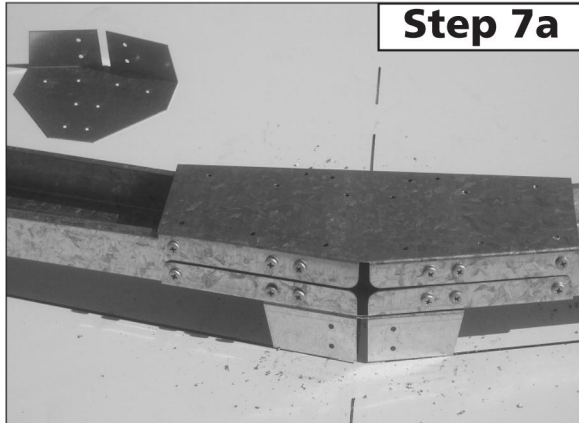



## AUSTRALIA PRODUCT WARRANTY AGAINST DEFECTS

### Congratulations on your purchase of an ABSCO SHED

ABSCO SHEDS, including garden sheds, garden beds, aviaries, storage units, garages, awnings and carports are made using high quality Australian made steel.

We are pleased to advise we warrant that the steel coating will not rust, crack, flake peel or blister for 30 years from date of purchase, when installed within Australia.

This warranty does not apply to surface deterioration of panels caused by 'Swarf' (Tiny particles of steel debris left from cutting, grinding or drilling operations) that has not been removed after building construction, or as a result of contact with damp soil, chemicals, fertilisers or other corrosive substances.

This warranty covers any Absco product used for normal domestic use and installed in accordance with the installation instructions. The warranty does NOT cover Damage caused by storms, wind, rain snow or poor foundations.

This warranty does NOT cover ABSCO products installed in severe coastal, industrial or other highly corrosive environments. The warranty does not cover fasteners (screws, nuts, bolts, rivets, hasps or sliding padbolts).

The warranty is limited to replacement and delivery of components and does not include any labour or installation costs. The benefits given by the warranty are in addition to your other rights and remedies under a law in relation to the goods or services to which the warranty relates.

The warranty applies to the exclusion of all other representations, guarantees or warranties express or implied, our goods come with guarantees that cannot be excluded under the Australian consumer law and is not transferable. You are entitled to a replacement or refund for a major failure and for compensation for any other foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of an acceptable quality and the failure does not amount to a major failure. For further information go to <http://www.consumerlaw.gov.au>.

Please retain a proof of purchase (sales docket or invoice) or register your warranty within 30 days of purchase here: [www.absco.com.au/register\\_warranty.php](http://www.absco.com.au/register_warranty.php)

In the unlikely event a warranty claim is made, it must be supported by photographic evidence and details of the defect, including component part numbers, together with proof of purchase documentation (or on-line registration of purchase) and forwarded to the address below. Upon receipt of the warranty claim, the Customer Service Manager will contact you within three business days to advise you of the assessment outcome of the claim, which may include your expenses incurred in making the claim.

THE CUSTOMER SERVICE MANAGER, ABSCO INDUSTRIES, PO BOX 119 ACACIA RIDGE QLD AUSTRALIA 4110

PHONE: 1800 029701 FAX: 07-33441191 EMAIL: [warranty@absco.com.au](mailto:warranty@absco.com.au)

Issued 01 January 2013

## ABSCO SHEDS - STORAGE GUIDELINES

ABSCO SHEDS include garden sheds, garden beds, storage units, aviaries, garages, awnings and carports.

ABSCO SHEDS are designed to be weatherproof for normal weather conditions. In the event of extreme weather conditions such as heavy rain, combined with high wind gusts, the ridge capping, sheeting joins, screw fixings etc., may exhibit minor deformations which may allow some water entry. These areas should be checked regularly to ensure that maximum strength and protection is maintained.

Other weather conditions such as extreme heat and extreme cold, moist or dry air can influence the effects of concrete floor moisture and/or condensation on the underside of the roof sheets.

ABSCO SHEDS and storage units are primarily used for storage of garden equipment such as lawnmowers, wheelbarrows, garden tools etc. Storage items that might be adversely affected by any of the above conditions may require additional protection such as being sealed or covered by plastic sheets and/or stacked above the concrete floor on timber slats.

Waterproof sealants may be used to offer further protection where required around joins and screw fixings, as can rubber door seals and other products which are available from most hardware outlets.

Placement of waterproof sealants (silicone) between the base of the shed and concrete slab is not recommended, as this process can have a reverse effect, preventing excess water from escaping, resulting with water accumulating and being trapped inside the shed.

Absco accepts no responsibility for water entry, floor moisture, condensation or the condition of the Contents inside your Absco steel building arising from any of the pre-mentioned weather conditions.